

EMER-FLEX COUPLING



CONTENTS

INDEX ·····	P. 2
PRODUCT FEATURES ·····	P. 3-4
PRODUCT STRUCTURE ·····	P. 5-6
PRODUCT APPLICATIONS ·····	P. 7-8
PRODUCT SELECTION ·····	P. 9-10
MODEL LIST ·····	P. 11
NEF-HUB ·····	P. 12
NES Series ·····	P. 13-14
NEF Series	
Spacer Type ·····	P. 15-16
Long Spacer Type ·····	P. 17-18
Stocked Long Spacer Type ·····	P. 19
Short Spacer Type ·····	P. 20
Single Type ·····	P. 21-22
Clamping Method ·····	P. 23-25
Power-Lock Method ·····	P. 26-31
NEH Series ·····	P. 32-33
Other Series ·····	P. 34-36
INSTALLATION ·····	P. 37-40
BORE SPECIFICATIONS ·····	P. 41-45

INDEX

PRODUCT SERIES LIST

NEW

NES Series



See **P. 13–14**

NES Series products are small disk couplings that use extra super duralumin. Both spacer-type and single-type couplings are available.

NEF Spacer Type Rough or keyed bore



See **P. 15–16**

With Spacer Type, two disk sets absorb angular misalignment, parallel misalignment and axial displacement.

NEF Long Spacer Type Rough or keyed bore



See **P. 17–18**

Long Spacer Type acts as a floating shaft when the distance between shaft ends is large.

NEF Single Type Rough or keyed bore



See **P. 21–22**

With Single Type, a single disk absorbs angular misalignment and axial displacement.

NEF Clamping Method



See **P. 23–25**

Refer to the page noted above when using the clamping method to connect to shafts (friction coupling by tightening one bolt).

NEF Power-Lock Method



See **P. 26–31**

Refer to the page noted above when using the Power-Lock method to connect to shafts.

NEH Series



See **P. 32–33**

NEH Series products are large-size, spacer type couplings.

Other Series

See **P. 34–36**

Tsubaki can manufacture a coupling to suit most any application, such as our G Type products that are compatible with gear couplings.

EMER-FLEX COUPLING


In order to make the EMER-FLEX COUPLING the ultimate disk coupling, Tsubaki optimized its design using finite element analysis. This coupling will meet all of your needs with no lubrication, no backlash, and with improved torsional stiffness for greater precision. This adds up to excellent flexible coupling performance for reliable torque transmission and absorption of shaft misalignment. Tsubaki offers a full line-up of EMER-FLEX couplings, from the small-size precision NES Series offering a minimum of 0.7N·m torque transmission to the large size NEH Series delivering up to 176000N·m torque transmission. Our easy-to-select and convenient wide range of models include the Long Spacer Type, which functions as a floating shaft; the U-Type that enables spacer mounting and dismounting without disassembling the disk connecting section; the G-Type, which can replace gear couplings and other types that use various shaft coupling methods (Power-Lock, keyway, clamp, etc.) These EMER-FLEX couplings are ready to meet all of your next-generation coupling needs.



**Low moment of inertia
(Square hub for Power-Lock)**



The original TSUBAKI design eliminates unnecessary flange portions.

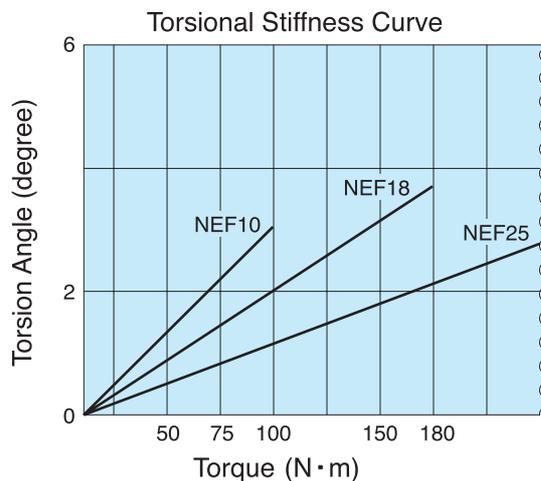

Disk (Supports high torsional stiffness)



Strength analysis is used to determine the optimum shape.

PRODUCT FEATURES

1 Finish-Bored Couplings

Single-Type and Spacer-Type couplings with pre-machined, standard diameter shaft bores (new JIS key standard type) are always in stock and available for fast deliveries.




6 Long Service Life

With the anti-wear parts, the Emer-flex Couplings have an amazingly long useable life.



11 Floating Shaft Function

Long Spacer Type acts as a floating shaft, allowing the transmittance of power from a drive unit at some distance, without the use of bearings.



2 Lubrication Free

With no sliding or moving parts, there are no friction faces and lubrication is unnecessary.



7 Large Disk Bore

The disk bore in EMER-FLEX couplings can handle even the largest of shaft diameters. This enables various flexible installations (with shaft mounted in the disk, etc.).



12 Excellent Environmental Durability

Because the Emerflex is an all-metal coupling without lubrication, it can stand up to high temperatures. The unit surface is also specially treated so it can withstand virtually any environment.



3 No Backlash

Torque is transmitted by friction connections, so there is no backlash and minimum hysteresis. This makes the Emerflex suitable for servo motor and other applications that need high-precision power transmissions.



8 Original Tsubaki Disk Design

Our original disk design achieves high torsional stiffness and axial flexibility.



13 Easy Installation

The Power-Lock Type is equipped with an anti-rotation hole in the pressure flange, so tightening bolts is made easy, with no shaft rotation. With the U-Type couplings (Unit Spacer Type), the spacer can be mounted and dismounted without disassembling the disk Easy connecting section.



4 High Torsional Stiffness

With high torsional stiffness, elastic deformation is greatly reduced so even slight rotation movement is precisely transmitted to driven side.



9 Axial Flexibility

When the motor shaft expands due to heat generated during operation, the coupling absorbs the expansion and does not generate unnecessary thrust power against bearing.




14 Quick Delivery

In addition to our product inventory with standard shaft bore diameters, Tsubaki can offer products with other shaft bore diameters with short delivery times.




5 Low Moment of Inertia

We have eliminated unnecessary flange portions, and offer a unique square hub, resulting in minimum moment of inertia. With the NES Series, the hub and spacer are made of extra super duralumin, which considerably reduces weight.



10 Excellent with Servo Motors

A new production method makes this coupling strong and lightweight. With the addition of the NES Series, we have couplings that are suitable for small to large servo motor.




15 Standardized Power-Lock Types

All Emerflex couplings come standard with a Power-Lock. So each is provided with a pressure plate and pressure bolt.




PRODUCT STRUCTURE


NEF Series

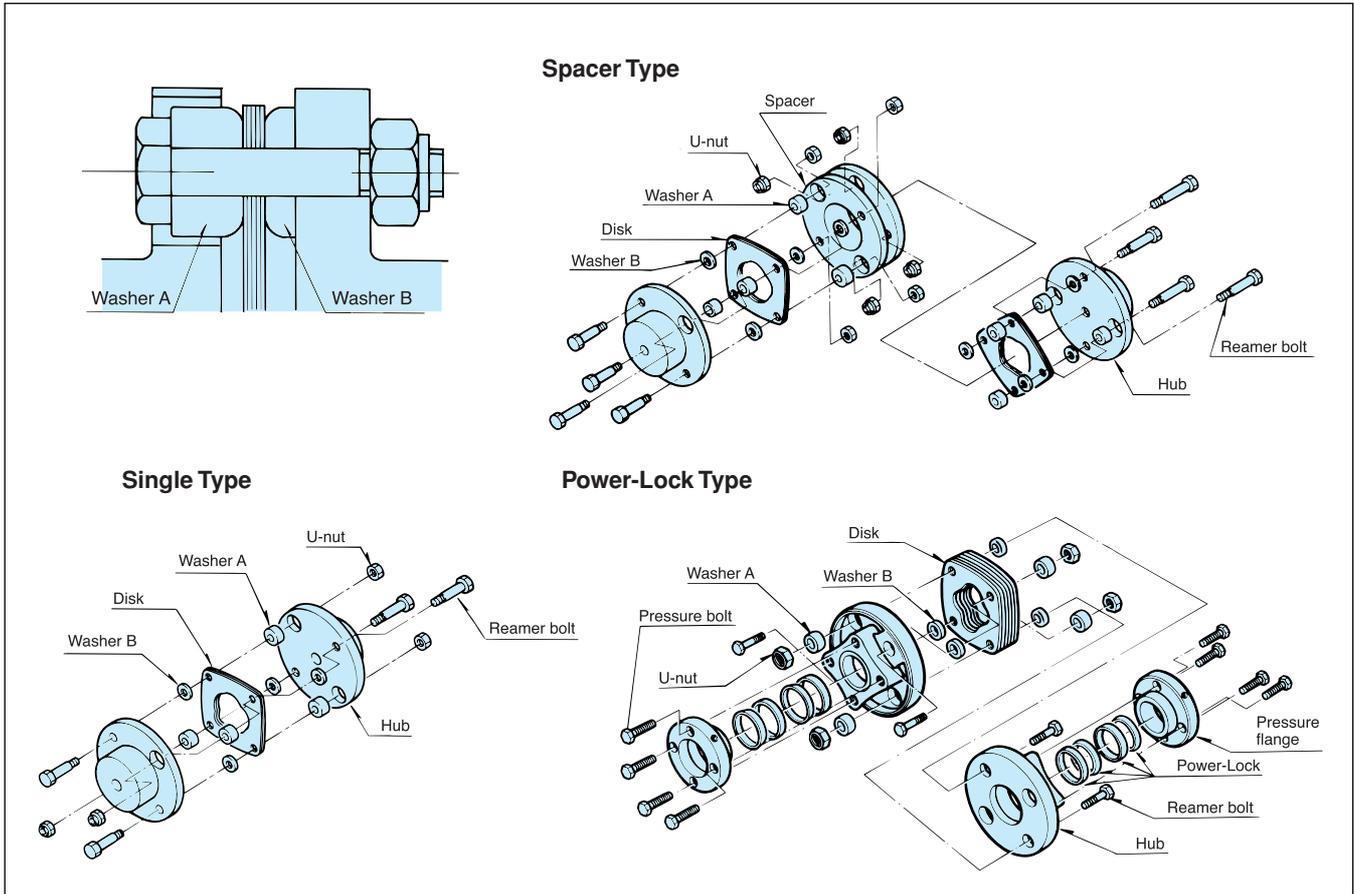


NES Series

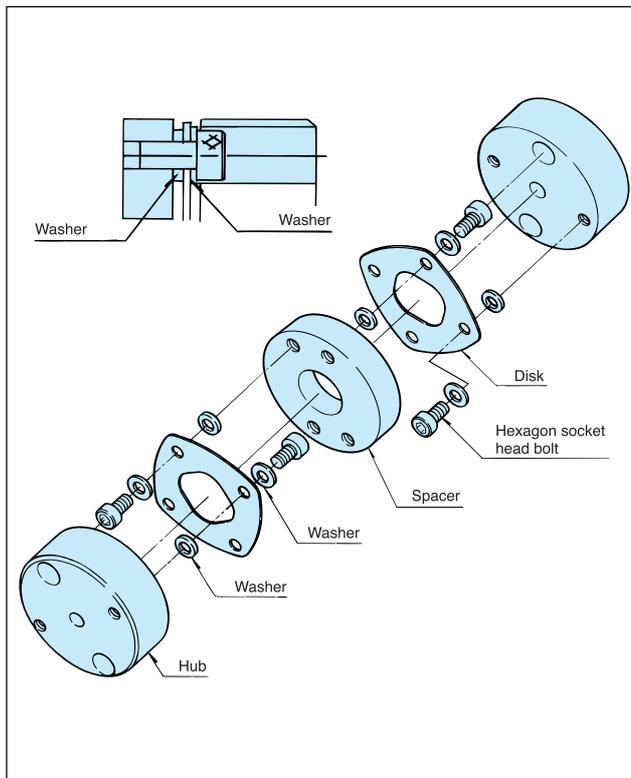


NEH Series

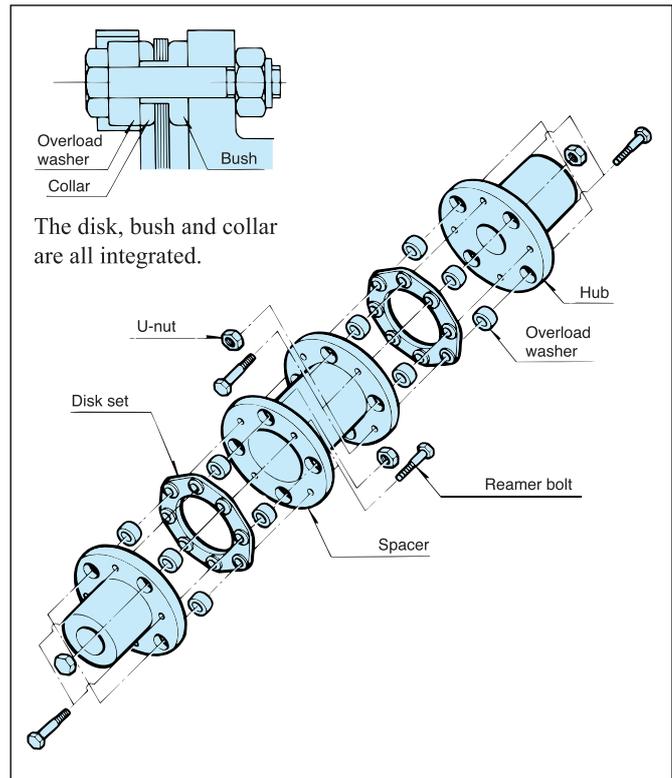

NEF Series Long Spacer Type

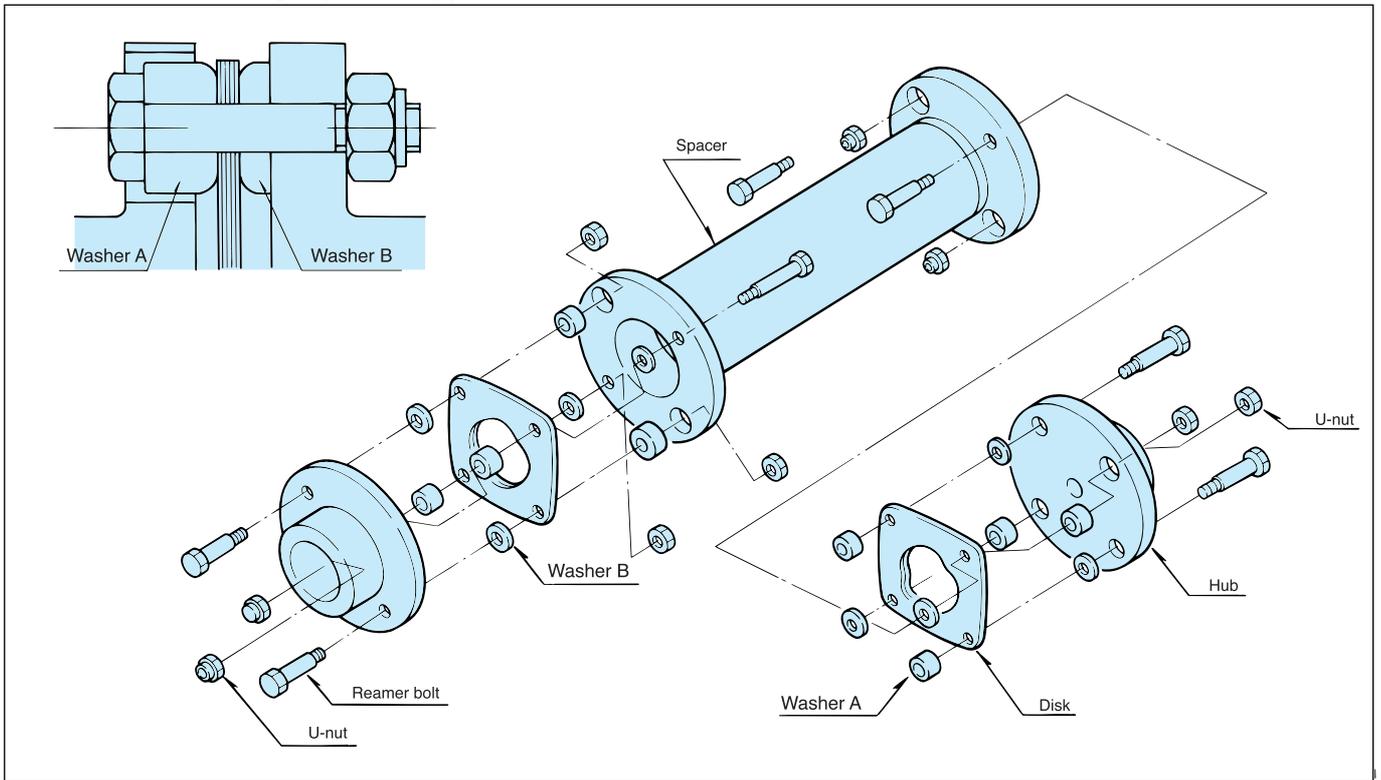


NEH Series Long Spacer Type

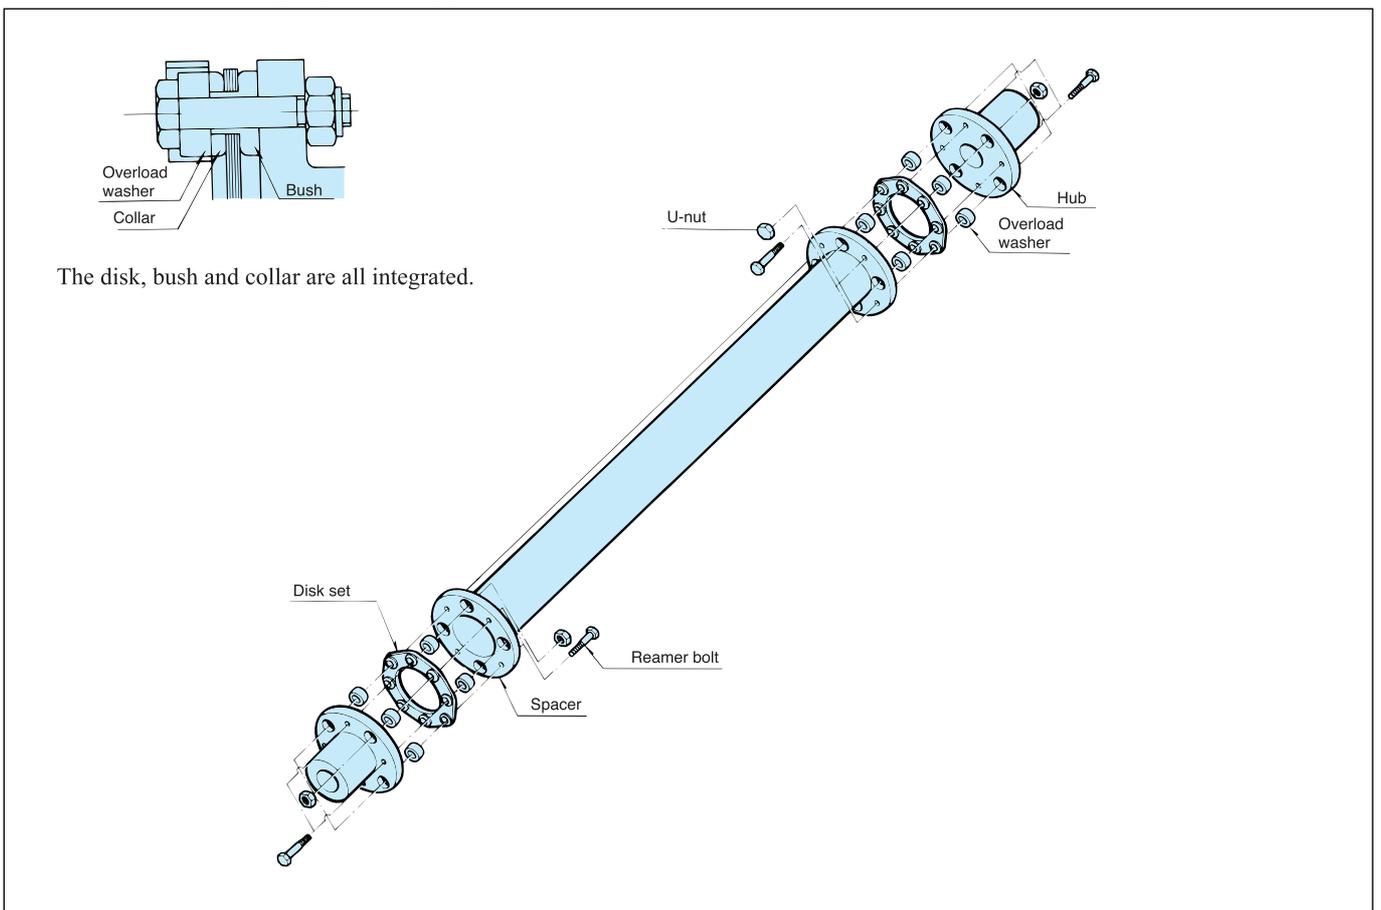


PRODUCT APPLICATIONS


NC machining centers

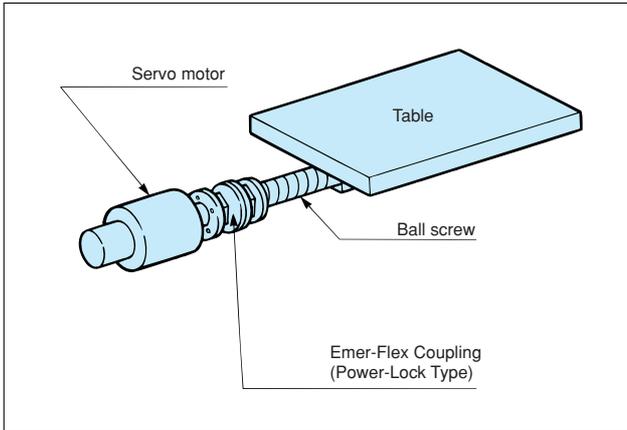


Lifters

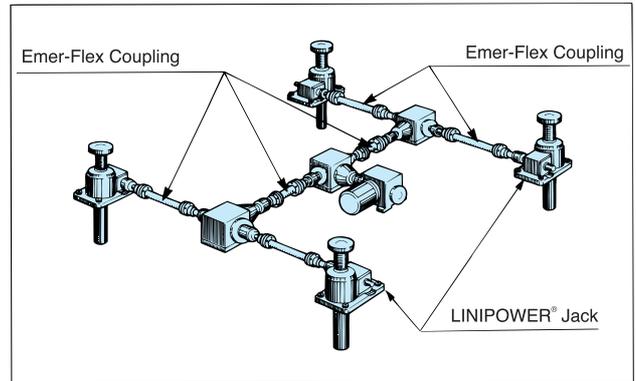


Windmills

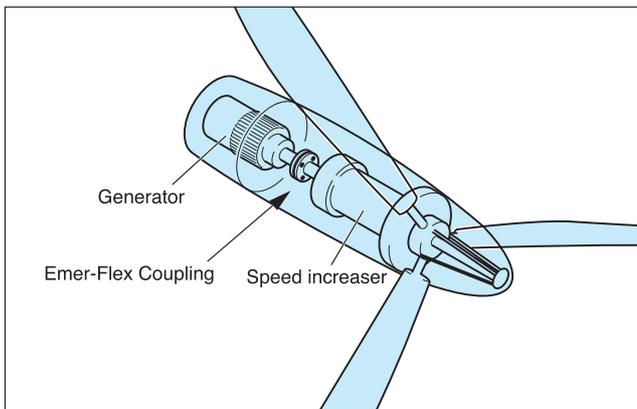


Printing presses

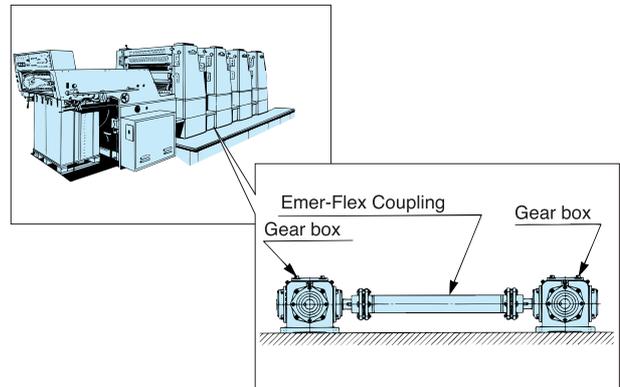


Robots

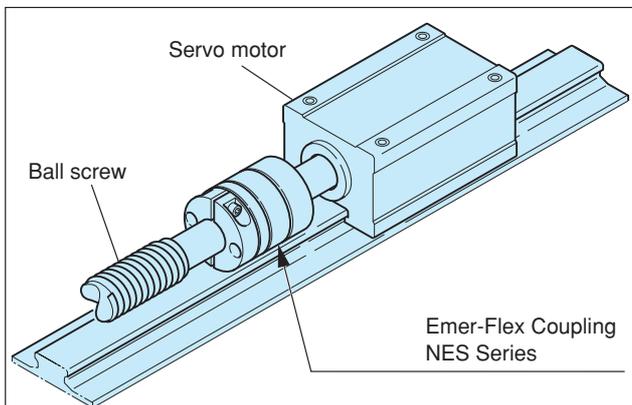


Elevator-type vertical parking lots

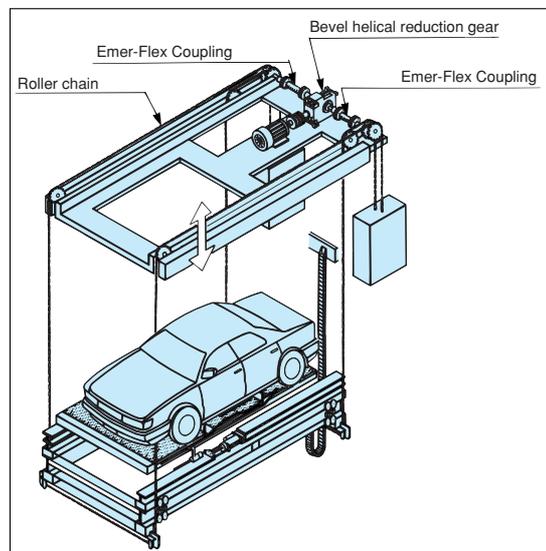

Example of Mounting

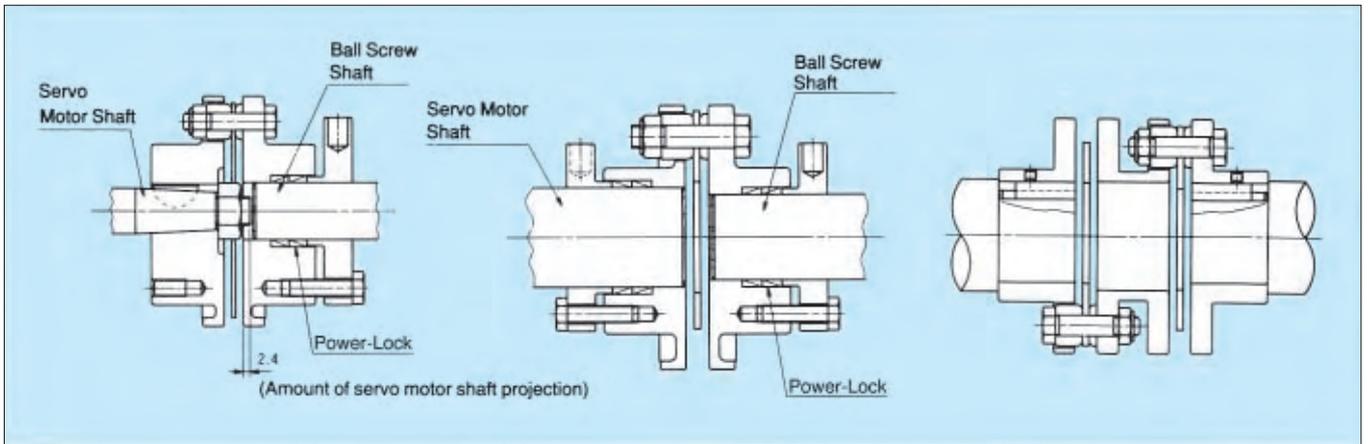

Example of Mounting

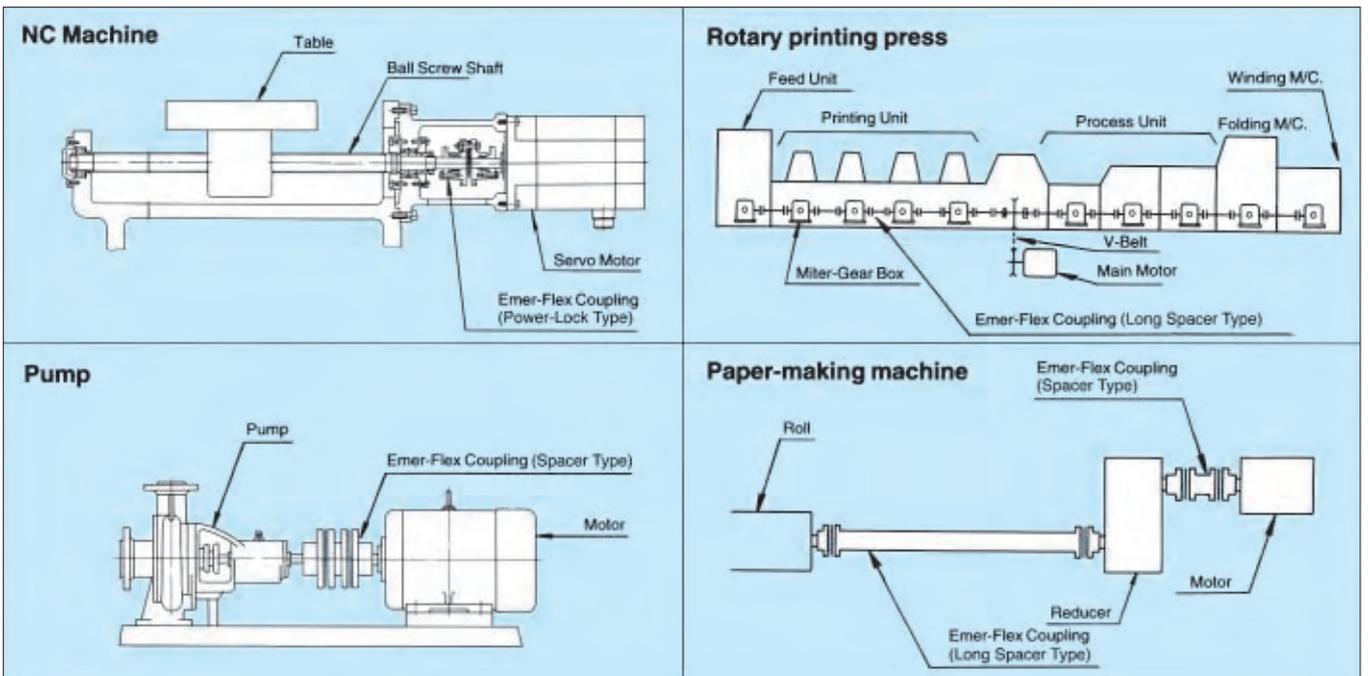

PRODUCT SELECTION

1. Correct torque calculation

1-1. When connecting to a servo motor or stepping motor

To determine the correct torque, multiply the maximum torque of the servo motor or stepping motor by the service factor (SF) corresponding to the type of load listed in the table below.

Service Factor (SF) Table

Type of Load	Constant Load	Mid-Level Variable Load	Heavy Variable Load
Service Factor (SF)	1.2	1.4	1.5

1-2. When connecting to a general-purpose motor

To determine the correct torque, multiply the load torque calculated with the following formula by the service factor (SF) corresponding to the type of load listed in the table on the right.

$$T = \frac{60000 \times P}{2 \pi \times n} \left\{ T = \frac{974 \times P}{n} \right\}$$

$$T' = T \times SF$$

T = Load torque N·m {kgf·m}

P = Transmission power kW

n = Rotation speed r/min

T = Correct torque N·m {kgf·m}

Service Factor (SF) Table

Type of Load	Type of Motor				
	General-Purpose Motor / Gas Turbine		Engine		
	Low Moment of Inertia	High Moment of Inertia	4-Cylinder	6-Cylinder	8-Cylinder
Constant Load	1.5-1.75	1.75-2.0	2.5-4.0	2.0-2.5	1.5-2.0
Mid-Level Variable Load	2.0-2.5	2.5-3.0	4.0-5.0	2.5-3.5	2.0-3.0
Heavy Variable Load	3.0-4.5	4.5-6.0	4.5-5.5	3.0-4.0	2.5-3.5

* If an impact load is expected, determine the correct torque by multiplying the maximum torque rated for the motor by an impact factor of 1 to 2.5.

* When clamp or power lock method is used, do not allow torque that is larger than the shaft bore friction transmission torque (see p. 25 and p. 31), including the starting torque, even for an instant.

2. Shaft Diameter

Make sure that the target shaft diameter does not exceed the allowable mounting shaft diameter for the coupling.

With the Power-Lock, check the power lock size, quantity and transmission torque.

With the clamp type, make sure that the correct torque determined in Item (1) does not exceed the allowable transmission torque for the clamp.

3. Maximum Rotation Speed for Long Spacer Types

When using the Long Spacer Type coupling at a high speed rotation, the rotation speed must be checked in order to avoid the resonance point.

When selecting the Long Spacer Type coupling, make sure that the maximum dimension "J" and the rotation speed for each model are not exceeded.

If the operating rotation speed exceeds the specified value, a larger model number must be selected.

If the operating rotation speed is not within the following range, or if the selection of a larger model number is not an option, a "High-Speed Type Long Spacer" coupling can be manufactured as one solution. (See p. 36)

Unit: mm

Operating Rotation Speed r/min Model No.	Long Spacer Maximum Length (Dimension "J")														
	3600	2000	1800	1500	1200	1000	900	750	720	600	500	400	300	200	150
NEF 04W	980	1310	1380	1510	1680	1840	1940	2130	2170	2380	2610	2910	3360	4120	4750
NEF 10W	1120	1500	1580	1730	1940	2120	2230	2450	2500	2730	2990	3350	3860	4730	5460
NEF 18W	1180	1580	1660	1820	2040	2230	2350	2570	2620	2870	3150	3520	4060	4970	5740
NEF 25W	1310	1760	1850	2030	2260	2480	2610	2860	2920	3190	3500	3910	4510	5520	
NEF 45W	1440	1930	2030	2230	2490	2720	2870	3140	3210	3510	3840	4290	4960		
NEF 80W	1560	2090	2200	2410	2690	2950	3100	3400	3470	3800	4160	4650	5360		
NEF130W	1780	2380	2510	2750	3070	3360	3540	3870	3950	4330	4740	5290			
NEF210W	1890	2520	2660	2910	3250	3560	3750	4100	4190	4580	5020	5610			
NEF340W	2024	2720	2870	3130	3500	3830	4040	4420	4510	4930	5400				
NEF540W	2180	2910	3070	3360	3750	4100	4320	4730	4820	5280	5780				
NEF700W	2270	3030	3190	3490	3890	4260	4490	4910	5010	5490					
NEH 09W	2190	2930	3090	3380	3780	4130	4360	4770	4870	5330	5830				
NEH 14W	2190	2930	3090	3380	3780	4130	4360	4770	4870	5330	5830				
NEH 20W	2400	3200	3380	3690	4130	4520	4760	5210	5320	5820					
NEH 30W	2570	3430	3610	3960	4420	4840	5100	5580	5690						
NEH 41W	2650	3540	3730	4080	4560	4990	5260	5760	5870						

4. Precautions for Connecting a Servo Motor Drive System

Depending on the natural frequency and electric control status of the system as a whole, a ball screw drive system using a servo motor may generate large vibration or abnormal sound caused by oscillation due to the characteristics of the servo motor. In this case, adjust the torsional stiffness and moment of inertia of the overall drive system to increase the torsional natural frequency, or adjust the servo gain with the electric control tuning function of the servo motor.

5. Select the EMER-FLEX Coupling that Meets the above Requirements, 1 through 4, from the Transmission Capacity Table.

Dynamic Balance Adjustment


Normally, because EMER-FLEX couplings provide a well-balanced design, they need no particular balance adjustment. However, when the coupling is used at a high rotation speed, or when a long spacer is used, balance adjustment may be required.

In this case, inform us of your desired operating rotation speed, JIS balance rating, dimension “J”, or spacer length so that we can perform your balance adjustment.

For dynamic balance adjustment, we use the following two methods:

- 1) Drilling the spacer flange end face, and
- 2) Mounting a balance weight to the spacer pipe periphery. (The spacer with a balance weight is shown below. The balance weight mounting position and quantity vary depending on operating conditions. Be careful not to interfere with the balance weight during rotation.)

When requesting a balance adjustment, specify either method 1) or 2) above.

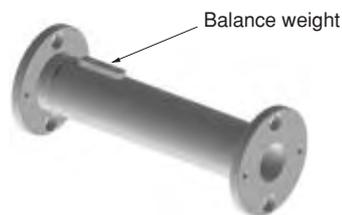

A Spacer Mounted with a Balance weight


Notes for Large Distance between Shaft Ends

For large distance between shaft ends, Tsubaki offers a Long Spacer Type that can be used in a floating state without the need for an intermediate shaft bearing. We recommend this type of coupling if it fits your application needs.

If an intermediate shaft bearing is being used instead of the Long Spacer Type coupling for reasons of convenience, fasten the intermediate shaft with a bearing to prevent the intermediate shaft from floating. In this case, it is recommended that the Spacer-Type disk coupling be used.



Long Spacer Type



Spacer Type + Fixed intermediate shaft + Spacer Type

If the distance between shafts is short and an intermediate shaft is used in a floating condition, be sure to use the Single-Type coupling.

Never use the Spacer-Type coupling under such conditions; it is very dangerous due to the marked floating tendency of the intermediate shaft.



Single Type + Floating intermediate shaft + Single Type



Spacer Type + Floating intermediate shaft + Spacer Type

Pay special attention to the above when replacing gear couplings or roller chain couplings with disk couplings.

MODEL LIST

Model No.	Type	Allowable Torque N·m { kgf·m }	Keyway Max. Bore Diameter ϕ		Rough Bore (Spacer Type)	Rough Bore (Single Type)	Standard Length (Long Spacer Type)	Long Spacer Type	Type of Hub				Bore Machining				G-Type	A-Hub Type	U-Type
			Standard Hub	Extended-Dia. Hub					Standard Hub	Extended-Dia. Hub	Long Hub	Square Hub	Keyway	Power-Lock	Clamp	Tapered Bore ($\phi 11, \phi 16$)			
NES07		{ 0.7 0.07 }	-	-					○						○				
NES15		{ 1.5 0.15 }	-	-					○						○				
NES20		{ 2 0.2 }	-	-					○						○				
NES30		{ 3 0.31 }	-	-					○						○				
NES50		{ 5 0.51 }	-	-					○						○				
NES70		{ 7 0.71 }	-	-					○						○				
NES100		{ 10 1 }	-	-					○						○				
NES250		{ 25 2.6 }	-	-					○						○				
NES800		{ 80 8.2 }	-	-					○						○				
NES1300		{ 130 13 }	-	-					○						○				
NEF02		{ 19.6 2 }	20	25	○	○			○	○	○		○	△	○				
NEF04		{ 39.2 4 }	23	28	○	○		△	○	○	○		○	○	○	△			
NEF10		{ 98 10 }	32	40	○	○	○	△	○	○	○	○	○	○	○	○			
NEF18		{ 176 18 }	35	42	○	○	○	△	○	○	○	○	○	○	○				
NEF25		{ 245 25 }	42	48	○	○	○	△	○	○	○	○	○	△	○				
NEF45		{ 441 45 }	50	60	○	○	○	△	○	○	○		○	△	○		△		
NEF80		{ 784 80 }	60	70	○	○	○	△	○	○	○		○	△			△		
NEF130		{ 1270 130 }	74	80	○	○	○	△	○	○	○		○	△			△		
NEF210		{ 2060 210 }	83	90	○	○	○	△	○	○	○		△	△			△		
NEF340		{ 3330 340 }	95	110	○	○	○	△	○	○	○		△				△		
NEF540		{ 5290 540 }	109	120	○	○		△	○	○	○		△				△		
NEF700		{ 6860 700 }	118	130	○	○		△	○	○	○		△				△		
NEH09		{ 8820 900 }	111	(158)	○			△	○				△				△	△	
NEH14		{ 13700 1400 }	111	(158)	○			△	○				△				△	△	
NEH20		{ 19600 2000 }	133	(182)	○			△	○				△				△	△	
NEH30		{ 29400 3000 }	152	(206)	○			△	○				△				△	△	
NEH41		{ 40200 4100 }	165	(224)	○			△	○				△				△	△	
NEH55		{ 53900 5500 }	187	-	△			△	△				△						
NEH70		{ 68600 7000 }	205	-	△			△	△				△						
NEH90		{ 88200 9000 }	231	-	△			△	△				△						
NEH110		{ 107800 11000 }	254	-	△			△	△				△						
NEH135		{ 132300 13500 }	263	-	△			△	△				△						
NEH150		{ 147000 15000 }	275	-	△			△	△				△						
NEH180		{ 176400 18000 }	289	-	△			△	△				△						

Values in parentheses for the NEH09 to NEH41 apply to the A-hub and U-types.

○ : Standard

△ : Custom-made

Small-Size, Precision: NES Series



● High torsional stiffness

The high torsional stiffness enables the couplings to provide excellent trackability for servo motors, making the NES Series perfect for precision control applications.

● Compact & low moment of inertia

NES Series couplings employ extra super duralumin in the hub and the spacer, resulting in a compact body. With the reduced outer diameter, this type also lowers the moment of inertia.


● RoHS compliant

The NES Series offers environmentally conscious designs that comply with the RoHS Directive.

● Shipment of fully assembled parts

NES Series couplings are shipped as a complete assembly (with finished bores), so the coupling can be directly mounted to your equipment.


NES Spacer Type Couplings

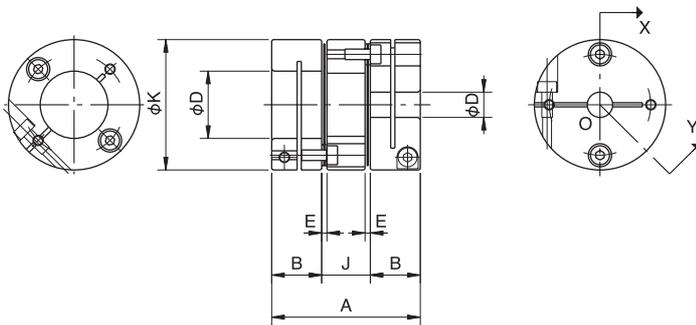

Cross-section X-O-Y

Reference Number System (Example)

NES30W - N10C X N12C

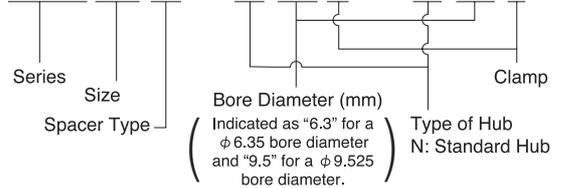


* Indicate the smaller bore diameter first.

Model No.	(Note 5) Allowable Torque N·m {kgf·m}	(Note 1) Max. Rotation speed r/min	(Notes 4, 6) Clamp Bore Dia. ϕD mm		Dimensions mm					Torsional Stiffness N·m/rad {kgf·m/rad}		Axial Spring Constant N/mm {kgf/mm}	(Note 3) Allowable Misalignment			(Note 2) Weight g	(Note 2) Moment of Inertia kg·m ²	(Note 2) GD ² {kgf·cm ² }
			Bore Dia. Range	Standard Bore Dia.	A	B	E	ϕK	J	Whole Coupling	Disk Only		Angular Misalignment deg	Parallel Misalignment mm	Axial Displacement mm			
NES07W	0.7 {0.07}	18000	4-6	Refer to the "Standard bore diameter and the transmission torque for each bore diameter" table (on the next page).	18.9	7.5	0.85	16	3.9	210 {21}	600 {61}	87 {8.9}	1.4	0.05	± 0.24	9	0.32×10^{-6}	{0.01}
NES15W	1.5 {0.15}	18000	4-8		26	8.9	1.1	19	8.2	420 {43}	1300 {130}	47 {4.8}	2.0	0.12	± 0.36	17	0.90×10^{-6}	{0.04}
NES20W	2.0 {0.20}	18000	5-10		31.7	11	1.1	24	9.7	1000 {100}	2800 {290}	43 {4.4}	2.0	0.15	± 0.60	32	2.7×10^{-6}	{0.11}
NES30W	3.0 {0.31}	18000	6-16		35.6	11.8	1.5	31	12	1600 {160}	4200 {430}	24 {2.4}	2.0	0.18	± 0.80	53	8.0×10^{-6}	{0.32}
NES50W	5.0 {0.51}	18000	6-16		40	12.5	1.5	34	15	2100 {210}	6500 {660}	25 {2.6}	2.0	0.24	± 0.80	76	14×10^{-6}	{0.54}
NES70W	7.0 {0.71}	18000	8-20		45.5	15	1.75	37	15.5	4600 {470}	9500 {970}	29 {3.0}	2.0	0.24	± 0.90	97	21×10^{-6}	{0.84}
NES100W	10 {1.0}	15000	8-22		48.1	15.7	2.6	44	16.7	6200 {630}	15000 {1500}	33 {3.4}	2.0	0.25	± 1.1	160	47×10^{-6}	{1.9}
NES250W	25 {2.6}	10000	10-25		59	20	3	55	19	11000 {1100}	22000 {2200}	11 {1.1}	2.0	0.28	± 1.4	320	140×10^{-6}	{5.7}
NES800W	80 {8.2}	10000	14-30		70.9	23.5	4.7	64	23.9	23000 {2300}	39000 {4000}	27 {2.8}	2.0	0.34	± 1.4	510	320×10^{-6}	{13}
NES1300W	130 {13}	10000	20-35		97.9	31.5	5.2	82	34.9	46000 {4700}	110000 {11000}	33 {3.4}	2.0	0.52	± 1.8	1200	1100×10^{-6}	{45}

- Notes
- The maximum rotation speed does not take dynamic balance into consideration.
 - The weight, moment of inertia and GD² are the values at maximum bore diameter.
 - The allowable misalignment is based on the assumption that other errors are "0".
 - Bore diameters other than the standard diameters specified on p. 14 can be manufactured upon request.
 - Depending on the bore diameter, the allowable torque of the coupling may not be satisfied. Refer to the "Standard Bore Diameter and Transmission Torque for Each Bore Diameter" table (on the next page).
 - The recommended tolerance of the mounting shaft is rated at "h7". A shaft diameter of $\phi 35$ corresponds to a servo motor shaft with a tolerance of (+0.010 to 0).


NES Single Type Couplings

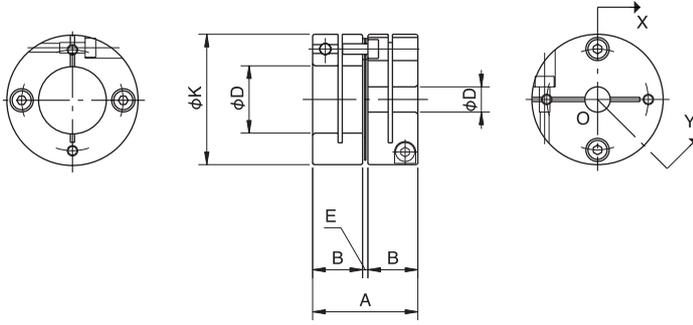

Cross-section X-O-Y

Reference Number System (Example)

NES30S - N10C X N12C

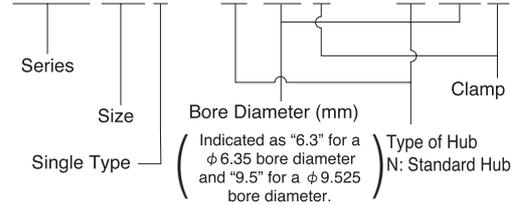

* Indicate the smaller bore diameter first.

Model No.	(Note 5) Allowable Torque N·m {kgf·m}	(Note 1) Max. Rotation Speed r/min	(Notes 4, 6) Clamp Bore Dia. φ D mm		Dimensions mm				Torsional Stiffness N·m/rad {kgf·m/rad}		Axial Spring Constant N/mm {kgf/mm}	(Note 3) Allowable Misalignment			(Note 2) Weight g	(Note 2) Moment of Inertia kg·m ²	(Note 2) GD ² {kgf·cm ² }
			Bore Dia. Range	Standard Bore Dia.	A	B	E	φ K	Whole coupling	Disk only		Angular Misalignment deg	Parallel Misalignment mm	Axial Displacement mm			
NES07S	0.7 {0.07}	18000	4-6	Refer to the "Standard bore diameter and the transmission torque for each bore diameter" table below.	15.85	7.5	0.85	16	430 {44}	1200 {120}	170 {17}	0.7	0.02	±0.12	7	0.26 × 10 ⁻⁶	{0.01}
NES15S	1.5 {0.15}	18000	4-8		18.9	8.9	1.1	19	780 {80}	2600 {270}	93 {9.5}	1.0	0.02	±0.18	12	0.63 × 10 ⁻⁶	{0.03}
NES20S	2.0 {0.20}	18000	5-10		23.1	11	1.1	24	1800 {180}	5600 {570}	86 {8.8}	1.0	0.02	±0.30	23	1.9 × 10 ⁻⁶	{0.08}
NES30S	3.0 {0.31}	18000	6-16		25.1	11.8	1.5	31	3700 {380}	8400 {860}	48 {4.9}	1.0	0.02	±0.40	37	5.5 × 10 ⁻⁶	{0.22}
NES50S	5.0 {0.51}	18000	6-16		26.5	12.5	1.5	34	4500 {460}	13000 {1300}	51 {5.2}	1.0	0.02	±0.40	49	8.8 × 10 ⁻⁶	{0.35}
NES70S	7.0 {0.71}	18000	8-20		31.75	15	1.75	37	7400 {760}	19000 {1900}	58 {5.9}	1.0	0.02	±0.45	66	14 × 10 ⁻⁶	{0.57}
NES100S	10 {1.0}	15000	8-22		34	15.7	2.6	44	10000 {1000}	30000 {3000}	65 {6.6}	1.0	0.02	±0.55	110	32 × 10 ⁻⁶	{1.3}
NES250S	25 {2.6}	10000	10-25		43	20	3	55	19000 {1900}	44000 {4500}	21 {2.1}	1.0	0.02	±0.70	220	100 × 10 ⁻⁶	{4.1}
NES800S	80 {8.2}	10000	14-30		51.7	23.5	4.7	64	39000 {4000}	78000 {8000}	52 {5.3}	1.0	0.02	±0.70	350	220 × 10 ⁻⁶	{8.7}
NES1300S	130 {13}	10000	20-35		68.2	31.5	5.2	82	77000 {7900}	220000 {22000}	65 {6.6}	1.0	0.02	±0.90	790	770 × 10 ⁻⁶	{31}

- Notes
- The maximum rotation speed does not take dynamic balance into consideration.
 - The weight, moment of inertia and GD² are the values at maximum bore diameter.
 - The allowable misalignment is based on the assumption that other errors are "0".
 - Bore diameters other than the standard diameters specified below can be manufactured upon request.
 - Depending on the bore diameter, the allowable torque of the coupling may be limited. Refer to the "Standard Bore Diameter and Transmission Torque for Each Bore Diameter" table below.
 - The recommended tolerance of the mounting shaft is rated at "h7". A shaft diameter of φ35 corresponds to a servo motor shaft with a tolerance of (+0.010 to 0).

Standard Bore Diameter and Transmission Torque for Each Bore Diameter


Unit: N·m

Bore Diameter (mm)	4	5	6	6.35	7	8	9	9.525	10	11	12	14	15	16	17	18	19	20	22	24	25	28	30	32	35
NES07	0.7	0.7	0.7																						
NES15	1.3	1.5	1.5	1.5	1.5	1.5																			
NES20		2	2	2	2	2	2	2	2																
NES30			3	3	3	3	3	3	3	3	3	3	3	3											
NES50			5	5	5	5	5	5	5	5	5	5	5	5											
NES70						7	7	7	7	7	7	7	7	7	7	7	7	7							
NES100						10	10	10	10	10	10	10	10	10	10	10	10	10	10						
NES250									25	25	25	25	25	25	25	25	25	25	25	25	25	25			
NES800												80	80	80	80	80	80	80	80	80	80	80	80	80	
NES1300																			107	118	130	130	130	130	130

NEF Series: Spacer Type Couplings


The NEF Series Spacer Type coupling incorporates two sets of disk kits, enabling absorption of all misalignments. This type of coupling provides the widest application range.

NEF02W - N□□ X N□□

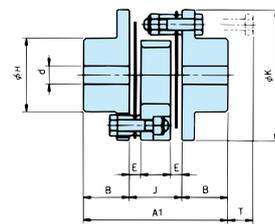


Note: The spacer shape is different from that of other sizes. The standard hub and extended-diameter hub are in stock. Contact us for long hubs.

Standard Hub × Standard Hub NEF□□W - N□□ X N□□

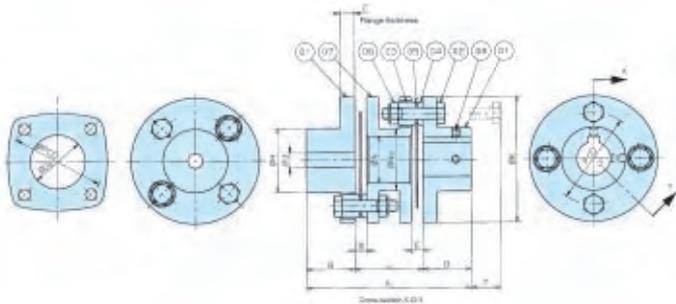


- ① Standard hub
- ② Reamer bolt
- ③ Washer A
- ④ Washer B
- ⑤ Disk
- ⑥ U-nut
- ⑦ Spacer
- ⑧ Set screw

Extended-Dia. Hub × Standard Hub NEF□□W - K□□ X N□□

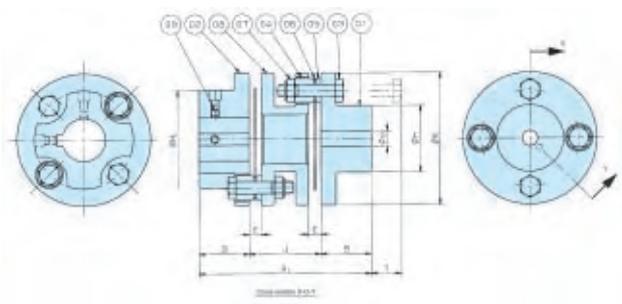


- ① Standard hub
- ② Extended-dia. hub
- ③ Reamer bolt
- ④ Washer A
- ⑤ Washer B
- ⑥ Disk
- ⑦ U-nut
- ⑧ Spacer
- ⑨ Set screw

Long Hub × Standard Hub NEF□□W - L□□ X N□□

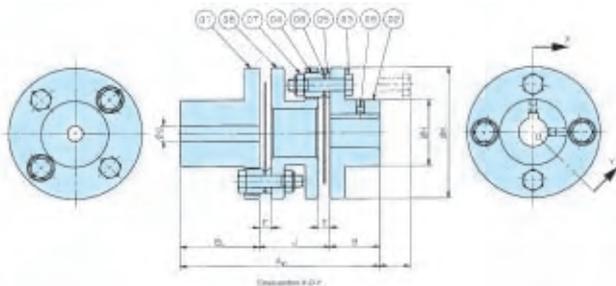


- ① Long hub
- ② Standard hub
- ③ Reamer bolt
- ④ Washer A
- ⑤ Washer B
- ⑥ Disk
- ⑦ U-nut
- ⑧ Spacer
- ⑨ Set screw

Extended-Dia. Hub × Extended-Dia. Hub NEF□□W - K□□ X K□□

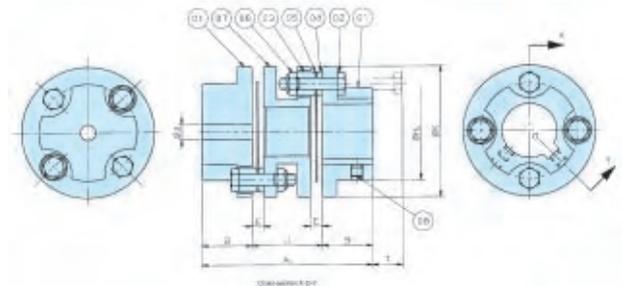


- ① Extended-dia. hub
- ② Reamer bolt
- ③ Washer A
- ④ Washer B
- ⑤ Disk
- ⑥ U-nut
- ⑦ Spacer
- ⑧ Set screw

Extended-Dia. Hub × Long Hub NEF□□W - K□□ X L□□

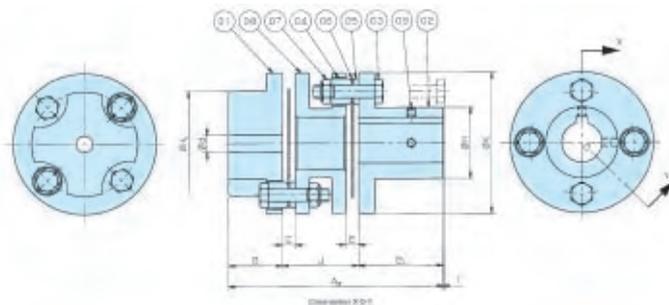

- ① Extended-dia. hub
- ② Long hub
- ③ Reamer bolt
- ④ Washer A
- ⑤ Washer B
- ⑥ Disk
- ⑦ U-nut
- ⑧ Spacer
- ⑨ Set screw

Long Hub × Long Hub NEF□□W - L□□ X L□□

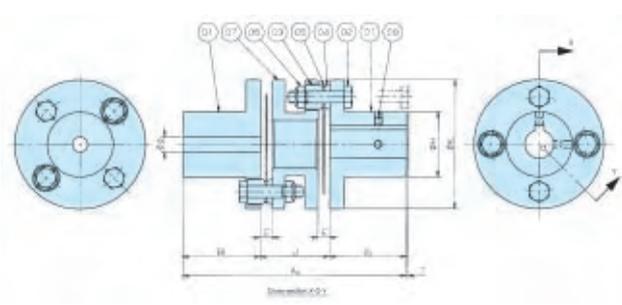

- ① Long hub
- ② Reamer bolt
- ③ Washer A
- ④ Washer B
- ⑤ Disk
- ⑥ U-nut
- ⑦ Spacer
- ⑧ Set screw

Spacer Type


Unit: mm

Model No.	Allowable Torque N·m{kgf·m}	Max. Rotation Speed r/min	Rough Bore d	Keyway Standard Stock Bore Dia. Range	Keyway Max. Shaft Dia. ϕ			Torsional Stiffness N·m/rad{kgf·m/rad}	Axial Spring Constant N/mm{kgf/mm}	PCD	A ₁	A ₂	A ₃
					Standard Hub	Long Hub	Extended-Dia. Hub						
NEF02W	19.6{ 2}	20000	8	14-25	20	-	25	1.00 × 10 ⁴ { 0.10 × 10 ⁴ }	34.3{ 3.5}	44	63	-	-
NEF04W	39.2{ 4}	20000	8	11-22	23	23	29	1.18 × 10 ⁴ { 0.12 × 10 ⁴ }	20.6{ 2.1}	49.5	86.8	101.4	116
NEF10W	98 { 10}	20000	10	12-30	32	32	40	3.92 × 10 ⁴ { 0.4 × 10 ⁴ }	29.4{ 3 }	63	89.8	104.4	119
NEF18W	176 { 18}	18000	12	14-35	35	35	42	7.84 × 10 ⁴ { 0.8 × 10 ⁴ }	63.7{ 6.5}	71	104.4	120.7	137
NEF25W	245 { 25}	15000	15	18-42	42	42	48	12.7 × 10 ⁴ { 1.3 × 10 ⁴ }	78.4{ 8 }	82	120	136.5	153
NEF45W	441 { 45}	13000	15	25-50	50	50	60	21.6 × 10 ⁴ { 2.2 × 10 ⁴ }	109 {11.1}	96	144.2	163.1	182
NEF80W	784 { 80}	12000	15	30-60	60	60	70	39.2 × 10 ⁴ { 4.0 × 10 ⁴ }	153 {15.6}	111	164.6	186.8	209
NEF130W	1270 {130}	10000	25	35-70	74	74	80	73.5 × 10 ⁴ { 7.5 × 10 ⁴ }	177 {18.1}	134	192.4	220.2	248
NEF210W	2060 {210}	8000	25	-	83	83	90	11.3 × 10 ⁵ {11.5 × 10 ⁴ }	225 {23 }	153	216	272.5	329
NEF340W	3330 {340}	7500	45	-	95	95	110	16.2 × 10 ⁵ {16.5 × 10 ⁴ }	235 {24 }	172	249.4	313.2	377
NEF540W	5290 {540}	3400	50	-	109	109	120	21.4 × 10 ⁵ {21.8 × 10 ⁴ }	274 {28 }	198	286.8	337.9	389
NEF700W	6860 {700}	3100	70	-	118	118	130	29.1 × 10 ⁵ {29.7 × 10 ⁴ }	294 {30 }	218	337.2	385.6	434

Model No.	B	B _L	E	F	H	H _L	J	K	D _b	N	N _o	N _i	T	T'	Allowable Misalignment			Weight kg	Moment of Inertia kg·m ²	GD ² {kgf·cm ² }
															Angular Misalignment deg	Parallel Misalignment mm	Axial Displacement ^(Note)			
NEF02W	20	-	4.9	5.5	32	45	23	57	21	24	-	24	11	-	2	0.3	±1.6	0.45	1.66 × 10 ⁻⁴	{ 6.64 }
NEF04W	25.4	40	6.1	7.5	34	50	36	67.5	29	25	33	25	15.5	0.9	2	0.5	±1.6	1.1	5.3 × 10 ⁻⁴	{ 21.4 }
NEF10W	25.4	40	6.6	7.5	46	66	39	81	37	37	46	37	16	1.4	2	0.55	±2.0	1.4	12 × 10 ⁻⁴	{ 47 }
NEF18W	28.7	45	8.3	9	51	66	47	93	39	38	48	38	23	6.7	2	0.6	±2.4	2.3	25 × 10 ⁻⁴	{ 100 }
NEF25W	33.5	50	11.2	9	61	78	53	104	45	47	58	47	21	4.5	2	0.7	±2.8	3.0	41 × 10 ⁻⁴	{ 166 }
NEF45W	41.1	60	11.7	11.5	71	92	62	126	51	58	69	58	23	4.1	2	0.8	±3.2	6.6	110 × 10 ⁻⁴	{ 440 }
NEF80W	47.8	70	11.7	14	84	104	69	143	61	71	81	71	29.5	7.3	2	0.9	±3.6	10.3	200 × 10 ⁻⁴	{ 800 }
NEF130W	57.2	85	16.8	14	106	129	78	168	73	92	102	92	20	-7.8	2	1.0	±5.0	16.1	447 × 10 ⁻⁴	{ 1787 }
NEF210W	63.5	120	17.0	16.5	118	147	89	194	84	103	114	103	32.5	-24	2	1.2	±5.4	23.2	931 × 10 ⁻⁴	{ 3722 }
NEF340W	76.2	140	21.6	16.5	137	166	97	214	97	118	132	118	19.5	-44.3	2	1.3	±6.6	40.2	1478 × 10 ⁻⁴	{ 5912 }
NEF540W	88.9	140	23.9	19	156	191	109	246	110	135	151	135	24.5	-15.6	2	1.4	±7.6	55	3014 × 10 ⁻⁴	{12055 }
NEF700W	101.6	150	27.2	25.5	169	209	134	276	120	146	164	146	40	-8.4	2	1.8	±8.0	60	5972 × 10 ⁻⁴	{23889 }

- Notes 1. See p. 12 for extended diameter and long hub dimensions.
 With the long hub, the overall length is extended because dimension "B" is lengthened.
 2. All stocked models are manufactured with pilot bores.
 Models NEF04W through NEF130W have been stocked with shaft bores machined within the above standard stock bore diameter range. (New JIS key, normal type)
 3. The maximum rotation speed depends on the transmission capacity of the coupling.
 No balance adjustment has been conducted.
 4. The weight, moment of inertia and GD² are the values at maximum bore diameter (keyway). For the extended-diameter hub and the long hub, add the individual values listed below.
 5. Spacer lengths other than the standard length can be manufactured. For details on the Long Spacer Type, see p. 17.
 6. The allowable axial displacement is based on the assumption that the angular misalignment is "0".
 7. Check the key surface pressure in accordance with your operating conditions (see p. 18). The hub material is S45C.

Reference Number System (Example)
NEF18W - N30J X K40E

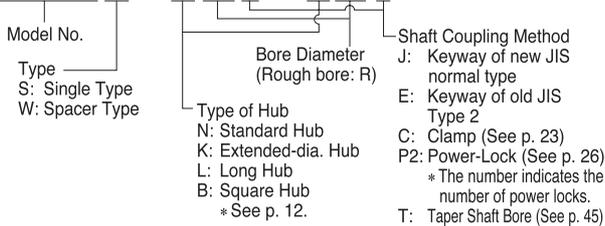


- *1: Indicate the smaller bore diameter first.
 *2: Indicate the rough bore (symbol "R") first.

Increase in Weight, Moment of Inertia and GD² per Extended-Diameter Hub / Long Hub

Model No.	Extended-Dia. Hub			Long Hub		
	Weight kg	Moment of Inertia kg·m ²	GD ² {kgf·cm ² }	Weight kg	Moment of Inertia kg·m ²	GD ² {kgf·cm ² }
NEF02W	0.027	0.18 × 10 ⁻⁴	{ 0.74 }	-	-	-
NEF04W	0.046	0.34 × 10 ⁻⁴	{ 1.35 }	0.056	0.12 × 10 ⁻⁴	{ 0.47 }
NEF10W	0.15	1.3 × 10 ⁻⁴	{ 5.18 }	0.20	0.77 × 10 ⁻⁴	{ 3.08 }
NEF18W	0.042	1.1 × 10 ⁻⁴	{ 4.19 }	0.14	0.67 × 10 ⁻⁴	{ 2.69 }
NEF25W	0.13	3.0 × 10 ⁻⁴	{ 11.3 }	0.20	1.3 × 10 ⁻⁴	{ 5.41 }
NEF45W	0.14	5.8 × 10 ⁻⁴	{ 23.2 }	0.30	2.8 × 10 ⁻⁴	{ 11.2 }
NEF80W	0.16	11 × 10 ⁻⁴	{ 42.6 }	0.47	6.4 × 10 ⁻⁴	{ 25.6 }
NEF130W	0.67	36 × 10 ⁻⁴	{ 144 }	0.99	20 × 10 ⁻⁴	{ 82.1 }
NEF210W	1.09	73 × 10 ⁻⁴	{ 289 }	2.45	64 × 10 ⁻⁴	{ 254 }
NEF340W	0.90	118 × 10 ⁻⁴	{ 473 }	3.85	132 × 10 ⁻⁴	{ 533 }
NEF540W	2.31	273 × 10 ⁻⁴	{1089 }	3.91	178 × 10 ⁻⁴	{ 710 }
NEF700W	2.91	431 × 10 ⁻⁴	{1724 }	4.41	236 × 10 ⁻⁴	{ 929 }

Long Spacer Type

The NEF Series Long Spacer Type of coupling enables the use of a floating shaft when there is some distance between devices. Depending on the spacer length, the Long Spacer Type of coupling can also absorb a large amount of eccentricity. This coupling is suitable for line shaft drives to miter gearboxes.

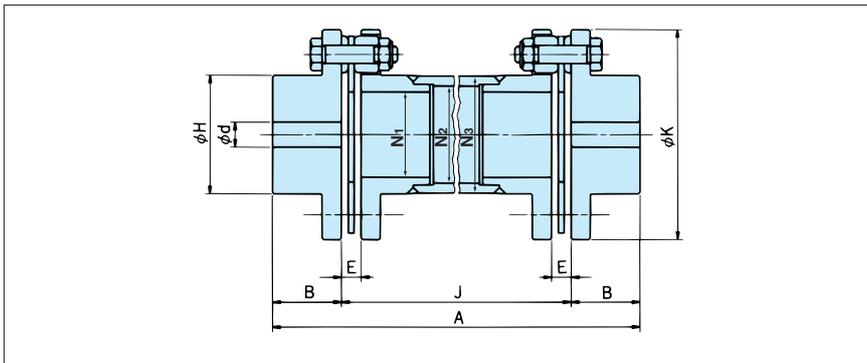


Torsional Stiffness Calculation for Vertical Long Spacer Type

If dimension "J" for each coupling size exceeds the value listed in the following table when a Long Spacer Type is installed vertically, a thrust supporter is required as shown on the right.

Unit: mm

Model No.	Dimension "J"	Model No.	Dimension "J"	Model No.	Dimension "J"
NEF04W	319	NEF130W	1910	NEH14W	1767
NEF10W	408	NEF210W	1924	NEH20W	1277
NEF18W	1171	NEF340W	2143	NEH30W	1747
NEF25W	1429	NEF540W	1542	NEH41W	1355
NEF45W	1386	NEF700W	1463		
NEF80W	1505	NEH09W	1153		

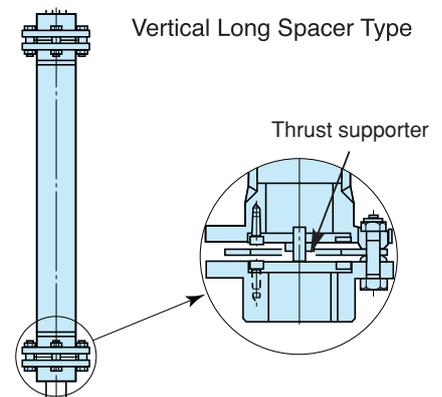

Formula for Torsional Stiffness Calculation of Vertical Long Spacer Type

Use the following formula to calculate the torsional stiffness of vertical Long Spacer Type coupling.

$$\frac{T \times 10^4}{(J - J_1) \cdot K_1 + K_2} \quad \text{Unit: } \begin{matrix} \text{N} \cdot \text{m/rad} \\ \{\text{kgf} \cdot \text{m/rad}\} \end{matrix}$$

Model No.	J ₁	K ₁	K ₂
NEF04W	63	0.0489	32.0
NEF10W	64	0.0472	22.2
NEF18W	74	0.0617	22.5
NEF25W	89.4	0.0475	19.2
NEF45W	105.6	0.0435	20.0
NEF80W	119	0.0501	20.0
NEF130W	148	0.0302	17.3
NEF210W	161	0.0333	18.3
NEF340W	195.6	0.0317	20.6
NEF540W	225.6	0.0276	49.5
NEF700W	257.6	0.0286	47.1
NEH09W	258	0.0360	17.0
NEH14W	292	0.0560	16.3
NEH20W	330	0.0374	15.4
NEH30W	373	0.0374	14.3
NEH41W	390	0.0354	15.8

J: The dimension "J" given in the external drawing (distance between hub end faces) in mm.

T: The allowable torque given in the transmission capacity table in N·m{kgf·m}

Substitute the constants given in the above table for J₁, K₁ and K₂.

Approx. Weight of Long Spacer Type Coupling / Moment of Inertia and GD² Calculation Formulae

Model No.	Weight			Moment of Inertia, GD ²			
	W ₁	W ₂	J ₁	G ₁	d ₁	G ₂	d ₂
NEF04W	0.04	1.3	6.3	16	8.7	4	2.17
NEF10W	0.05	2.0	6.4	48	16.3	12	4.063
NEF18W	0.06	3.1	7.4	100	18.9	25	4.72
NEF25W	0.08	4.4	8.9	171	26.4	43	6.59
NEF45W	0.10	8.0	10.6	446	41.3	112	10.33
NEF80W	0.11	13.6	11.9	872	55.1	218	13.78
NEF130W	0.18	22.7	14.8	2137	88.3	534	22.06
NEF210W	0.21	31.6	16.1	4066	113.6	1017	28.41
NEF340W	0.25	52.7	19.6	6722	161.7	1681	40.42
NEF540W	0.36	68.8	22.6	14363	208.4	3591	52.09
NEF700W	0.38	78.4	25.8	26687	241.9	6672	60.47
NEH09W	0.44	64.8	25.8	22086	217.5	5522	54.38
NEH14W	0.44	72.4	29.2	24107	217.5	6027	54.38
NEH20W	0.65	109	33	47625	311.0	11906	77.74
NEH30W	0.75	150	37.3	82770	407.5	20693	101.87
NEH41W	0.95	201	39	125437	461.2	31359	115.3

Use the following formula to calculate the weight of the Long Spacer Type (at maximum bore diameter).

Unit: kg

$$\text{Weight} = W_1 (J - J_1) + W_2$$

J: Dimension "J" (distance between hub end faces) in mm.

Substitute the constants given in the above table for J₁, W₁, W₂, d₁, d₂, G₁ and G₂.

Use the following formulae to calculate the moment of inertia and GD² (at maximum bore diameter).

$$GD^2 = W_1 \times d_1 (J - J_1) + G_1$$

Unit: kgf·cm²

$$\text{Moment of inertia} = W_1 \times d_2 (J - J_1) + G_2$$


Unit: kg·cm²

* This formula applies to cases where dimension "J" exceeds "J₁" (Unit: cm).

Model No.	Type (Number of Bolts)	Allowable Torque N·m{kgf·m}	Rough Bore d	Max. Bore Dia. (Keyway)	B	D _B	E	H	K	N ₁	N ₂	N ₃	A	J	Allowable Misalignment		
															Angular Misalignment θ (deg)	Axial Displacement	Parallel Misalignment ε
NEF 04W	4	39.2{ 4}	8	23	25.4	29	6.1	34	67.5	17	27	32			2	± 1.6	(J - E) × sin θ
NEF 10W	4	98 { 10}	10	32	25.4	37	6.6	46	81	26	36	42			2	± 2.0	
NEF 18W	4	176 { 18}	12	35	28.7	39	8.3	51	93	30	40	46			2	± 2.4	
NEF 25W	4	245 { 25}	15	42	33.5	45	11.2	61	104	38	50	56			2	± 2.8	
NEF 45W	4	441 { 45}	15	50	41.1	51	11.7	71	126	48	60	68			2	± 3.2	
NEF 80W	4	784 { 80}	15	60	47.8	61	11.7	84	143	61	70	80			2	± 3.6	
NEF130W	4	1270 { 130}	25	74	57.2	73	16.8	106	168	76	92	102			2	± 5.0	
NEF210W	4	2060 { 210}	25	83	63.5	84	17	118	194	90	103	115			2	± 5.4	
NEF340W	4	3330 { 340}	45	95	76.2	97	21.6	137	214	110	120	132			2	± 6.6	
NEF540W	4	5290 { 540}	50	109	88.9	110	23.9	156	246	125	134	154			2	± 7.6	
NEF700W	4	6860 { 700}	70	118	101.6	120	27.2	169	276	136	145.2	165.2			2	± 8.0	
NEH 09W	6	8820 { 900}	70	111	110	144	19	161	276	127	135	159	2B + J		1.4	± 3.2	
NEH 14W	8	13700 { 1400}	70	111	127	155	19	161	276	127	135	159			1	± 2.1	
NEH 20W	8	19600 { 2000}	75	133	146	178	19	193	308	150	160.7	190.7			1	± 2.4	
NEH 30W	8	29400 { 3000}	75	152	165	201	21.5	218	346	175	186.3	216.3			1	± 2.8	
NEH 41W	8	40200 { 4100}	120	165	171	218	24	240	375	187	196	232			1	± 2.8	
NEH 55W	8	53900 { 5500}	130	187	225	252	29.5	272	445	207	227.4	267.4			1	± 3.6	
NEH 70W	8	68600 { 7000}	150	205	247	275	31.3	297	470	209	230	280			1	± 3.8	
NEH 90W	8	88200 { 9000}	150	231	278	304	32.0	334	511	247	273.9	323.9			1	± 4.3	
NEH110W	8	107800 {11000}	190	254	305	343	32.5	364	556	277	305.6	355.6			1	± 4.8	
NEH135W	8	132300 {13500}	190	263	317	350	34.0	382	587	304	331	381			1	± 5.0	
NEH150W	8	147000 {15000}	210	275	331	368	34.5	399	629	304	331	381			1	± 5.6	
NEH180W	8	176400 {18000}	210	289	347	380	35.5	419	654	319	344.6	406.4			1	± 5.7	


- Notes 1. All sizes are custom-made.
 2. When placing an order, specify dimension "J". Consult with us if your required dimension is 6000 mm or greater.
 3. When the Long Spacer Type is used at a high rotation speed, or if dimension "J" is extremely long, balance adjustment or a critical speed check may be required. See p. 9.
 4. Contact us to vertically install a Long Spacer Type coupling.
 5. The NEF10W, 18W and 25W Power-Lock Type couplings use the square hub for power lock. (See p. 12)
 6. Refer to the following description and check the key surface pressure in accordance with your operating conditions. The hub material is S45C.

Installation (Example)

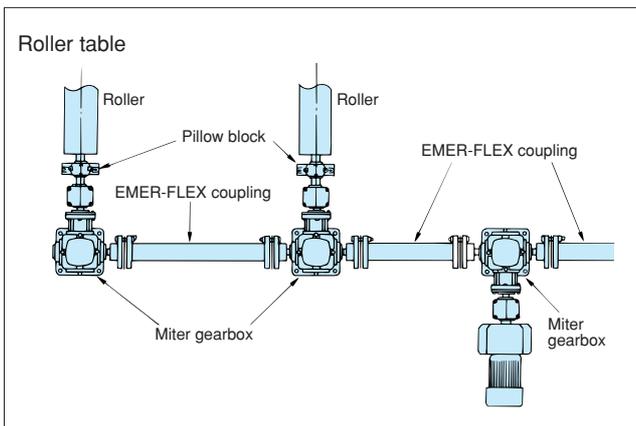

Reference Number System (Example)

NEF25W - N35JV X N40E - J1000

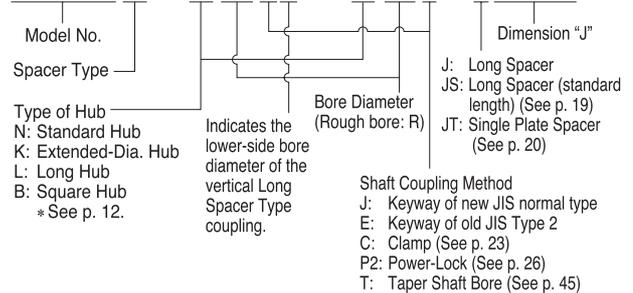


- *1: Indicate the smaller bore diameter first.
 *2: Indicate the rough bore (symbol "R") first.

*[Reference] Key Surface Pressure Calculation

$$P = \frac{19600 \times T}{D \times t \times B} \text{ (N/mm}^2\text{)}$$


(T = Operating torque (N·m), D = Bore diameter (mm), t = Key height (mm), B = Effective key length (mm))

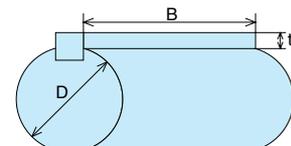

Long Spacer Type (standard lengths)

We maintain a stock of NEF Series Long Spacer Type couplings at ISO standard lengths available for a quick delivery. The spacer offers a well-balanced design with reduced thickness, suitable for back pullout type pumps, fans and compressors. This type of coupling can also be combined with the extended-diameter hub, long hub, and clamp types.

Long Spacer Type (standard length)

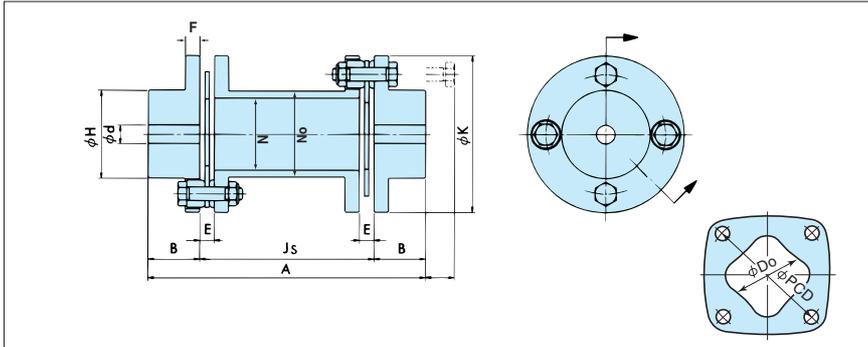


Long Spacer Types in Stock

Model No.	Spacer Length, Dimension "J" (mm)					
	100	127	140	180	200	250
NEF10W-JS□□□	○		○			
NEF18W-JS□□□	○		○			
NEF25W-JS□□□	○	○	○			
NEF45W-JS□□□	○	○	○	○	○	○
NEF80W-JS□□□		○	○	○	○	○
NEF130W-JS□□□		○	○	○	○	○
NEF210W-JS□□□			○	○	○	
NEF340W-JS□□□				○	○	

Reference Number System (Example)

NEF25W - N35J X N40E - JS140

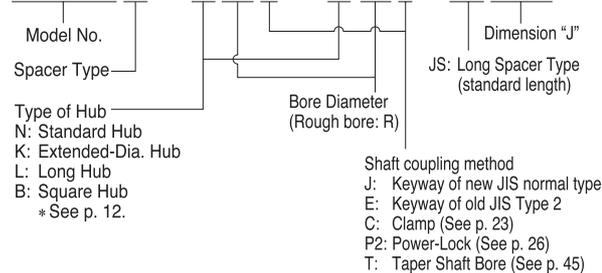

- *1: Indicate the smaller bore diameter first.
- *2: Indicate the rough bore (symbol "R") first.

Note) Refer to the dimension table for dimension "J".
 Dimension "J" indicates the distance between hub end faces.
 Actual spacer length = J - 2E

Model No.	Allowable Torque N·m{kgf·m}	Rough Bore d	Max. Bore Dia. (Keyway)	B	D _o	E	H	K	A	F	N	N _o	T	PCD	Weight kg	Moment of Inertia kg·cm ²	GD ² {kgf·cm ² }	Allowable Misalignment							
																		Angular Misalignment θ (deg)	Axial Displacement	Parallel Misalignment ε					
NEF 10W	JS100	98{10}	10	32	25.4	37	6.6	46	81	7.5	37	46	16	63	1.7	12.8	{ 51 }	2	±2.0	1.63					
	JS140																				1.9	13.5	{ 54 }	2	2.32
NEF 18W	JS100	176{18}	12	35	28.7	39	8.3	51	93	9	38	48	23	71	2.6	25.8	{ 103 }	2	±2.4	1.60					
	JS140																				2.8	26.8	{ 107 }	2	2.30
NEF 25W	JS100	245{25}	15	42	33.5	45	11.2	61	104	9	47	58	21	82	3.3	42.3	{ 169 }	2	±2.8	1.55					
	JS127																				3.5	43.8	{ 175 }	2	2.02
	JS140																				3.6	44.3	{ 177 }	2	2.25
NEF 45W	JS100	441{45}	15	50	41.1	51	11.7	71	126	11.5	58	69	23	96	6.9	97.5	{ 390 }	2	±3.2	1.54					
	JS127																				7.2	100	{ 400 }	2	2.01
	JS140																				7.3	101	{ 404 }	2	2.24
	JS180																				7.6	104.5	{ 418 }	2	2.94
	JS200																				7.8	106.3	{ 425 }	2	3.28
	JS250																				8.2	110.8	{ 443 }	2	4.16
NEF 80W	JS127	784{80}	15	60	47.8	61	11.7	84	143	14	71	81	29.5	111	10.8	201.8	{ 807 }	2	±3.6	2.01					
	JS140																				11	203.5	{ 814 }	2	2.24
	JS180																				11.3	208.8	{ 835 }	2	2.94
	JS200																				11.5	211.5	{ 846 }	2	3.28
	JS250																				12	218.3	{ 873 }	2	4.16
NEF130W	JS127	1270{130}	25	74	57.2	73	16.8	106	168	14	92	102	20	134	16.7	420.8	{1683}	2	±5.0	1.92					
	JS140																				16.8	424.5	{1698}	2	2.15
	JS180																				17.3	435.8	{1743}	2	2.85
	JS200																				17.6	441.5	{1766}	2	3.20
	JS250																				18.2	455.5	{1822}	2	4.07
NEF210W	JS140	2060{210}	25	83	63.5	84	17	118	194	16.5	103	114	32.5	153	24	851.5	{3406}	2	±5.4	2.15					
	JS180																				24.5	868.8	{3475}	2	2.84
	JS200																				24.8	877.5	{3510}	2	3.19
NEF340W	JS180	3330{340}	45	95	76.2	97	21.6	137	214	16.5	118	132	19.5	172	42	1427.3	{5709}	2	±6.6	2.76					
	JS200																				42.4	1444	{5776}	2	3.11

Using the Long Spacer Type Couplings in Stock

The following methods are available if the Long Spacer Type couplings in stock do not fit your equipment interface.

① When the required Long Spacer is slightly longer than the product in stock...





Use the long hub on both sides.

② When the required long spacer is slightly shorter than the product in stock...




Extend both shafts from the hubs.

The disk's bore diameter can be made to fit the maximum shaft diameter of either the standard or the long hub.

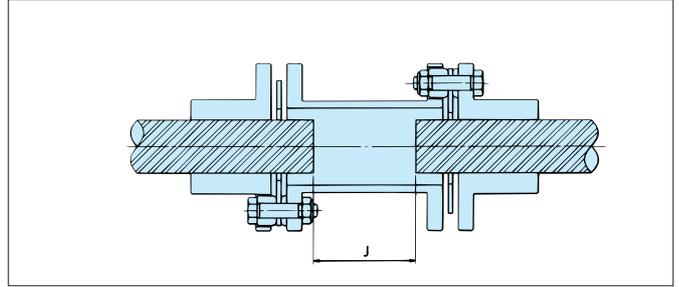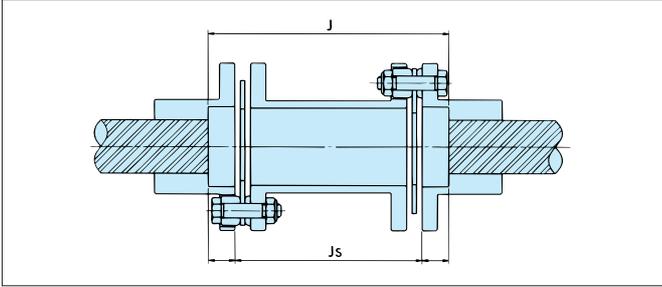

Single Plate Spacer Type

The NEF Series Single Plate Spacer Type reduces the distance between hub end faces (dimension "J") and is suitable for applications where the distance between shaft ends is short, or where the overall length must be shortened.

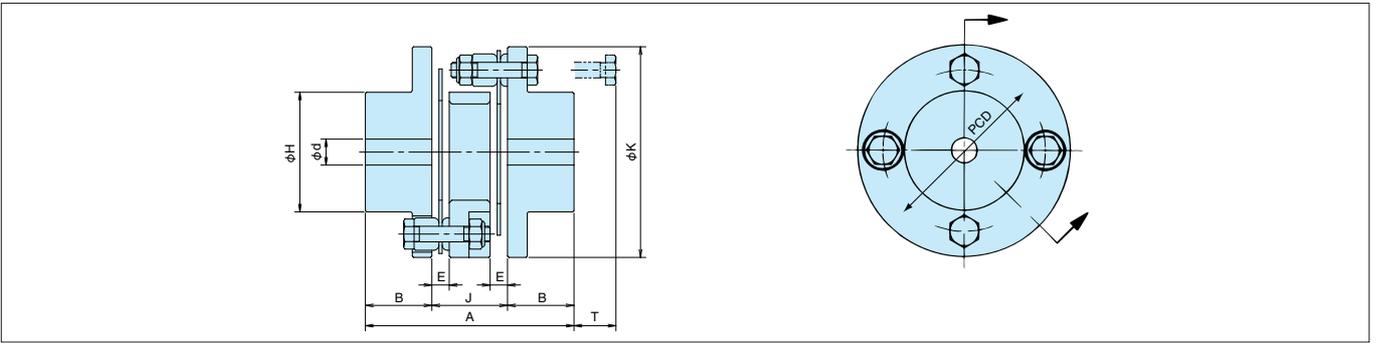


Unit: mm

Model No.	Allowable Torque N·m{kgf·m}	Rough bore d	Max. Bore Dia. (Keyway)	PCD	A	B	E	H	J	K	T
NEF04W	39.2 { 4}	8	23	49.5	79	25.4	6.1	34	28.2	67.5	15.5
NEF10W	98 { 10}	10	32	63	79.6	25.4	6.6	46	28.8	81	16
NEF18W	176 { 18}	12	35	71	94.3	28.7	8.3	51	36.9	93	23
NEF25W	245 { 25}	15	42	82	107.2	33.5	11.2	61	40.2	104	21
NEF45W	441 { 45}	15	50	96	128.5	41.1	11.7	71	46.3	126	23
NEF80W	784 { 80}	15	60	111	148.9	47.8	11.7	84	53.3	143	29.5
NEF130W	1270 {130}	25	74	134	174	57.2	16.8	106	59.6	168	20
NEF210W	2060 {210}	25	83	153	197.5	63.5	17	118	70.5	194	32.5
NEF340W	3330 {340}	45	95	172	228.8	76.2	21.6	137	76.4	214	19.5
NEF540W	5290 {540}	50	109	198	265.8	88.9	23.9	156	88	246	24.5
NEF700W	6860 {700}	70	118	218	309.2	101.6	27.2	169	106	276	40

Reference Number System (Example)

NEF25W - N35J X N40E - JT40.2






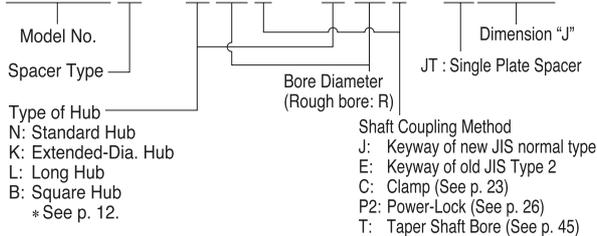


*1: Indicate the smaller bore diameter first.
 *2: Indicate the rough bore (symbol "R") first.

NEF Series: Single Type Couplings

The NEF Series Single Type employs a single disk set, enabling absorption of angular eccentricity only. This type cannot absorb parallel misalignment, so it is recommended only for applications that enable precision centering of the servo motor for NC machining centers, NC wood machining tools, etc.

Under general centering conditions, use of the Spacer Type is recommended.
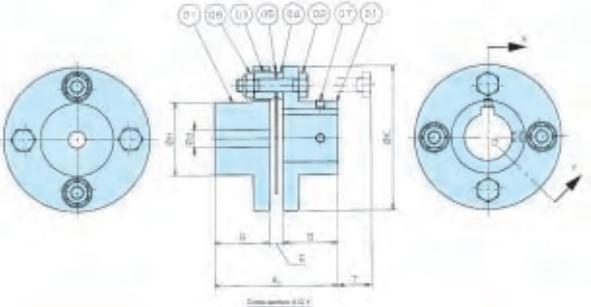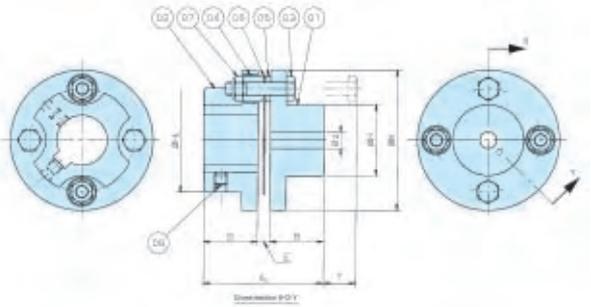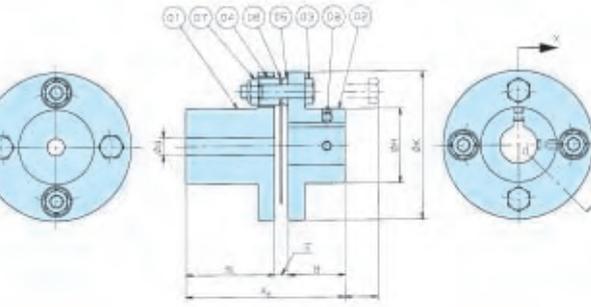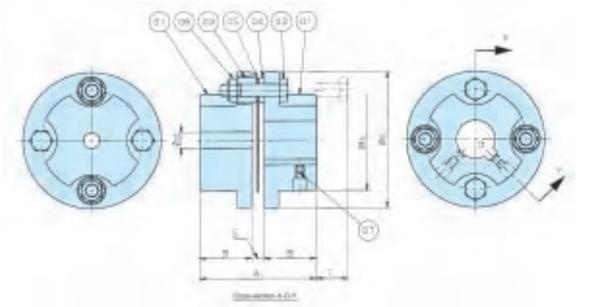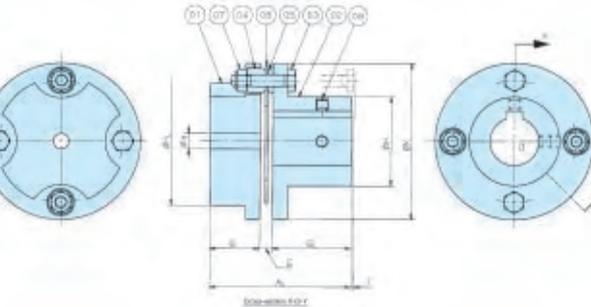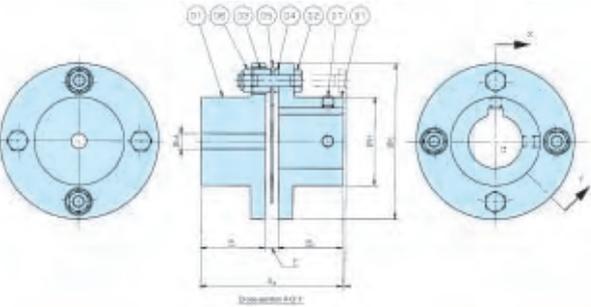
<p>Standard Hub × Standard Hub NEF□□S - N□□ X N□□</p>  <p>① Standard hub ② Reamer bolt ③ Washer A ④ Washer B ⑤ Disk ⑥ U-nut ⑦ Spacer</p>	<p>Extended-Dia. Hub × Standard Hub NEF□□S - K□□ X N□□</p>  <p>① Standard hub ② Extended-dia. hub ③ Reamer bolt ④ Washer A ⑤ Washer B ⑥ Disk ⑦ U-nut ⑧ Set screw</p>
<p>Long Hub × Standard Hub NEF□□S - L□□ X N□□</p>  <p>① Long hub ② Standard hub ③ Reamer bolt ④ Washer A ⑤ Washer B ⑥ Disk ⑦ U-nut ⑧ Set screw</p>	<p>Extended-Dia. Hub × Extended-Dia. Hub NEF□□S - K□□ X K□□</p>  <p>① Extended-dia. hub ② Reamer bolt ③ Washer A ④ Washer B ⑤ Disk ⑥ U-nut ⑦ Set screw</p>
<p>Extended-Dia. Hub × Long Hub NEF□□S - K□□ X L□□</p>  <p>① Extended-dia. hub ② Long hub ③ Reamer bolt ④ Washer A ⑤ Washer B ⑥ Disk ⑦ U-nut ⑧ Set screw</p>	<p>Long Hub × Long Hub NEF□□S - L□□ X L□□</p>  <p>① Long hub ② Reamer bolt ③ Washer A ④ Washer B ⑤ Disk ⑥ U-nut ⑦ Set screw</p>

Single

Unit: mm

Model No.	Allowable Torque N·m{kgf·m}	Max. Rotation Speed r/min	Rough Bore d	Standard Stock Bore Dia. Range	Keyway Max. Shaft Dia. ϕ			Torsional Stiffness N·m/rad{kgf·m/rad}	Axial Spring Constant N/mm{kgf/mm}	A ₁	A ₂
					Standard Hub	Long Hub	Extended-Dia. Hub				
NEF02S	19.6{ 2 }	20000	8	14~25	20	—	25	1.96×10^4 { 0.2×10^4 }	68.6{ 7.0 }	44.9	—
NEF04S	39.2{ 4 }	20000	8	11~22	23	23	29	2.45×10^4 { 0.25×10^4 }	40.2{ 4.1 }	56.9	71.5
NEF10S	98 { 10 }	20000	10	12~30	32	32	40	8.82×10^4 { 0.9×10^4 }	58.8{ 6 }	57.4	72
NEF18S	176 { 18 }	18000	12	14~35	35	35	42	15.7×10^4 { 1.6×10^4 }	127 { 13 }	65.7	82
NEF25S	245 { 25 }	15000	15	18~42	42	42	48	25.5×10^4 { 2.6×10^4 }	157 { 16 }	78.2	94.7
NEF45S	441 { 45 }	13000	15	25~50	50	50	60	44.1×10^4 { 4.5×10^4 }	219 { 22.3 }	93.9	112.8
NEF80S	784 { 80 }	12000	15	30~60	60	60	70	78.4×10^4 { 8×10^4 }	307 { 31.3 }	107.3	129.5
NEF130S	1270{130}	10000	25	35~70	74	74	80	14.7×10^5 { 15×10^4 }	355 { 36.2 }	131.2	159
NEF210S	2060{210}	8000	25	—	83	83	90	22.5×10^5 { 23×10^4 }	441 { 45 }	144	200.5
NEF340S	3330{340}	7500	45	—	95	95	110	32.3×10^5 { 33×10^4 }	470 { 48 }	174	237.8
NEF540S	5290{540}	3400	50	—	109	109	120	43.1×10^5 { 44×10^4 }	549 { 56 }	201.7	252.8
NEF700S	6860{700}	3100	50	—	118	118	130	58.8×10^5 { 60×10^4 }	588 { 60 }	230.4	278.8

Model No.	A ₃	B	B _L	E	H	H _L	K	T	Allowable Misalignment		Weight kg	Moment of Inertia kg·m ²	GD ² {kgf·cm ² }
									Angular Misalignment deg	Axial Displacement (Note)			
NEF02S	—	20	—	4.9	32	45	57	11	1	± 0.8	0.33	1.23×10^{-4}	{ 4.9 }
NEF04S	86.1	25.4	40	6.1	34	50	67.5	15.5	1	± 0.8	0.6	2×10^{-4}	{ 8 }
NEF10S	86.6	25.4	40	6.6	46	66	81	16	1	± 1.0	0.8	6×10^{-4}	{ 25 }
NEF18S	98.3	28.7	45	8.3	51	66	93	23	1	± 1.2	1.3	13×10^{-4}	{ 53 }
NEF25S	111.2	33.5	50	11.2	61	78	104	19	1	± 1.4	1.8	22×10^{-4}	{ 89 }
NEF45S	131.7	41.1	60	11.7	71	92	126	23	1	± 1.6	4.3	56×10^{-4}	{ 224 }
NEF80S	151.7	47.8	70	11.7	84	104	143	29.5	1	± 1.8	6.9	110×10^{-4}	{ 440 }
NEF130S	186.8	57.2	85	16.8	106	129	168	20	1	± 2.5	11.5	270×10^{-4}	{ 1080 }
NEF210S	257	63.5	120	17.0	118	147	194	32.5	1	± 2.7	16.4	520×10^{-4}	{ 2080 }
NEF340S	301.6	76.2	140	21.6	137	166	214	19.5	1	± 3.3	28.0	880×10^{-4}	{ 3520 }
NEF540S	303.9	88.9	140	23.9	156	191	246	24.5	1	± 3.8	33	1750×10^{-4}	{ 7000 }
NEF700S	327.2	101.6	150	27.2	169	209	276	40	1	± 4.0	37	3250×10^{-4}	{ 13000 }

Notes 1. See p. 12 for extended diameter and long hub dimensions.

With the long hub, the overall length is extended because dimension "B" is lengthened.

2. All stocked models are manufactured with pilot bores.

Models NEF04W through NEF130W have been stocked with shaft bores machined within the above standard stock bore diameter range. (New JIS key, normal type)

3. The maximum rotation speed depends on the transmission capacity of the coupling.

No balance adjustment has been conducted.


4. The weight, moment of inertia and GD² are the values at maximum bore diameter (keyway). For the extended-diameter hub and the long hub, add the individual values listed below.

5. The allowable axial displacement is based on the assumption that the angular misalignment is "0".

6. Check the key surface pressure in accordance with your operating conditions (see p. 18). The hub material is S45C.

Reference Number System (Example)

NEF18S - N30J X K40E

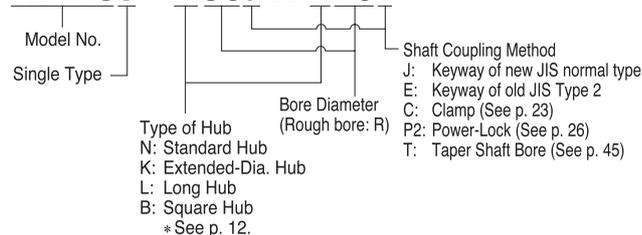

*1: Indicate the smaller bore diameter first.


*2: Indicate the rough bore (symbol "R") first.

NEF Clamp Method: Spacer Type Couplings

The NEF Clamp Method enables friction coupling to a shaft, with one bolt tightened in each hub.

Compared to the Power-Lock Method (see p. 26) that also employs friction coupling, these couplings can reduce axial dimension, saving installation space.

The Spacer Type can absorb all types of misalignment, while the Single Type coupling can handle all misalignments except parallel misalignment.

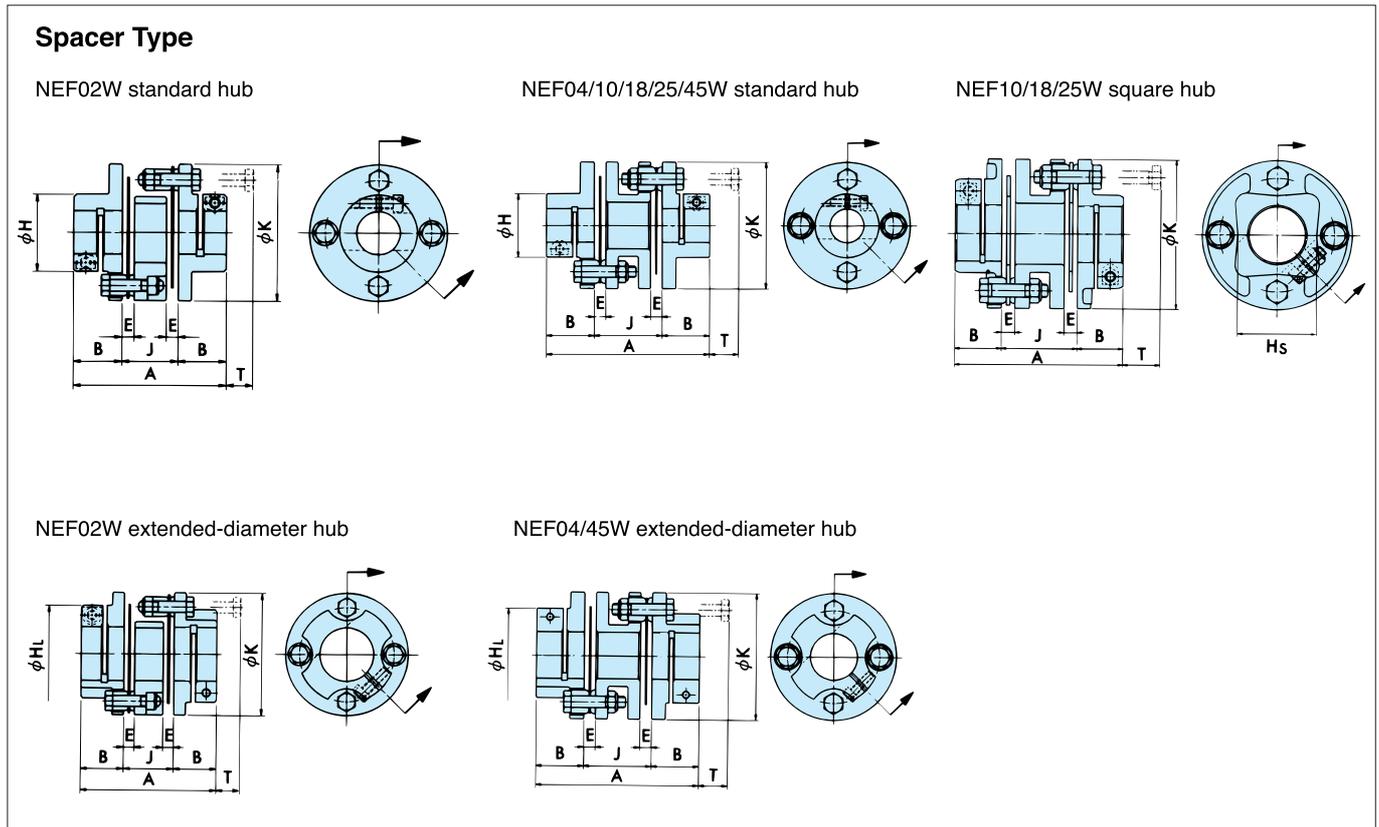

Spacer Type


Unit: mm

Model No.	Allowable Torque N·m{kgf·m}	Max. Rotation Speed r/min	Standard Stock Bore Diameter	Max. Bore Dia.	Torsional Stiffness N·m/rad {kgf·m/rad}	Axial Spring Constant N/mm {kgf/mm}	A	B
NEF02W	19.6 { 2 }	20000	⑩, ⑫, ⑮, ⑱, 19, 20, 22, 24, 25	25	1.00×10^4 { 0.10×10^4 }	34.3 { 3.5 }	63.0	20
NEF04W	39.2 { 4 }	20000	⑫, ⑭, ⑮, ⑰, ⑱, 19, 20, 22, 24, 25	26	1.18×10^4 { 0.12×10^4 }	20.6 { 2.1 }	86.8	25.4
NEF10W	98 {10}	20000	⑮, ⑱, ⑲, ⑳, ㉑, ㉒, ㉓, ㉔, ㉕, ㉖, ㉗, ㉘, ㉙	35	3.92×10^4 { 0.4×10^4 }	29.4 { 3 }	89.8	25.4
NEF18W	176 {18}	18000	⑲, ㉑, ㉒, ㉓, ㉔, ㉕, ㉖, ㉗, ㉘, ㉙	35	7.84×10^4 { 0.8×10^4 }	63.7 { 6.5 }	104.4	28.7
NEF25W	245 {25}	15000	㉓, ㉔, ㉕, ㉖, ㉗, ㉘, ㉙, ㉚, ㉛, ㉜, ㉝	42	12.7×10^4 { 1.3×10^4 }	78.4 { 8 }	120	33.5
NEF45W	441 {45}	13000	㉛, ㉜, ㉝, ㉞, ㉟, ㊱, ㊲, ㊳, ㊴, ㊵, ㊶, ㊷, ㊸, ㊹, ㊺, ㊻, ㊼, ㊽, ㊾, ㊿	55	21.6×10^4 { 2.2×10^4 }	109 {11.1}	144.2	41.1

Model No.	E	H	Hl	Hs	J	K	U	T	Weight kg	Moment of Inertia kg·cm ²	GD ² {kgf·cm ² }	Allowable Misalignment		
												Angular Misalignment deg	Parallel Misalignment	Axial Displacement
NEF02W	4.9	32	45	—	23	57	—	11	0.45(0.46)	1.68(1.90)	6.72(7.61)	2	0.3	±1.6
NEF04W	6.1	34	50	—	36	67.5	—	15.5	1.28(1.29)	5.2 (5.7)	20.9 (22.7)	2	0.5	±1.6
NEF10W	6.6	46	—	47	39	81	66	16	1.52(1.35)	11.7 (11.0)	46.7 (44.0)	2	0.55	±2.0
NEF18W	8.3	51	—	49	47	93	68	23	2.45(2.24)	24.8 (23.6)	99.1 (94.3)	2	0.6	±2.4
NEF25W	11.2	61	—	60	53	104	78.3	19	3.3 (3.0)	40.8 (38.5)	163 (154)	2	0.7	±2.8
NEF45W	11.7	71	92	—	62	126	—	23	6.9 (7.0)	95.8 (104)	383 (416)	2	0.8	±3.2

- Notes
- The maximum rotation speed depends on the transmission capacity of the coupling.
No balance adjustment has been conducted.
 - The circled standard stock bore diameters are for the standard hubs, the diameters in squares are for the square hub, and unmarked diameters are for the extended-diameter hubs.
 - The weight, moment of inertia and GD² are the values at maximum bore diameter for the round hub. Values in parentheses for the NEF02/04/45 apply to the extended-diameter hub. Values in parentheses for the NEF10/18/25 apply to the square hub.
 - The allowable axial displacement is based on the assumption that the angular misalignment is "0".
 - To prevent the clamp bolt from loosening, the square hub type uses a U-nut, while other types use a NYLOCK bolt.

NEF Clamp Method: Single Type Couplings

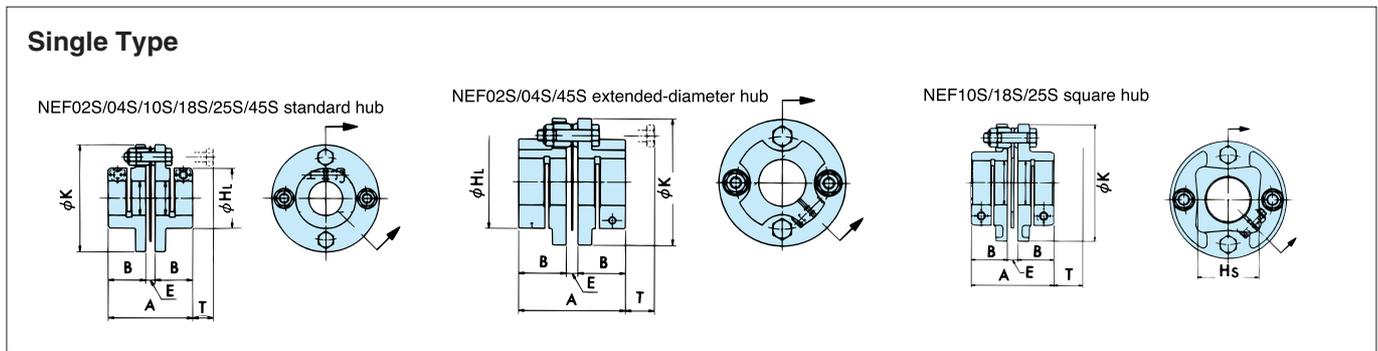

Single Type

Unit: mm


Model No.	Allowable Torque N·m {kgf·m}	Max. Rotation Speed r/min	Standard Stock Bore Diameter	Max. Bore Dia.	Torsional Stiffness N·m/rad {kgf·m/rad}	Axial Spring Constant N/mm {kgf/mm}	A	B
NEF02S	19.6 { 2 }	20000	⑩, ⑫, ⑮, ⑱, 19, 20, 22, 24, 25	25	1.96×10^4 { 0.2×10^4 }	68.6 { 7.0 }	44.9	20
NEF04S	39.2 { 4 }	20000	⑫, ⑭, ⑮, ⑰, ⑱, 19, 20, 22, 24, 25	26	2.45×10^4 { 0.25×10^4 }	40.2 { 4.1 }	56.9	25.4
NEF10S	98 { 10 }	20000	⑮, ⑱, ⑳, ㉒, ㉔, ㉕, ㉘, ㉚, ㉛, ㉜	35	8.82×10^4 { 0.9×10^4 }	58.8 { 6 }	57.4	25.4
NEF18S	176 { 18 }	18000	⑲, ㉒, ㉔, ㉘, ㉚, ㉜, ㉝	35	15.7×10^4 { 1.6×10^4 }	127 { 13 }	65.7	28.7
NEF25S	245 { 25 }	15000	㉕, ㉚, ㉜, ㉝, ㉞, ㉟, ㊱, ㊲	42	25.5×10^4 { 2.6×10^4 }	157 { 16 }	78.2	33.5
NEF45S	441 { 45 }	13000	㉚, ㉜, ㉝, ㉞, ㉟, ㊱, ㊲, ㊳, ㊴	55	44.1×10^4 { 4.5×10^4 }	219 { 22.3 }	93.9	41.1

Model No.	E	H	HL	Hs	K	U	T	Weight kg	Moment of Inertia kg · cm ²	GD ² kgf · cm ²	Allowable Misalignment	
											Angular Misalignment deg	Axial Displacement
NEF02S	4.9	32	45	—	57	—	11	0.33(0.39)	1.23(1.56)	4.9 (6.24)	1	± 0.8
NEF04S	6.1	34	50	—	67.5	—	15.5	0.78(0.79)	2.78(3.23)	11.1 (12.9)	1	± 0.8
NEF10S	6.6	46	—	47	81	66	16	0.92(0.80)	6.43(5.85)	25.7 (23.4)	1	± 1.0
NEF18S	8.3	51	—	49	93	68	23	1.45(1.24)	13.5 (12.2)	54.1 (48.8)	1	± 1.2
NEF25S	11.2	61	—	60	104	78.3	19	2.1 (1.8)	23 (20.9)	92 (83.4)	1	± 1.4
NEF45S	11.7	71	92	—	126	—	23	4.6 (4.7)	57.5 (65.8)	230 (263)	1	± 1.6

- Notes
- The maximum rotation speed depends on the transmission capacity of the coupling.
No balance adjustment has been conducted.
 - The circled standard stock bore diameters are for the standard hubs, the diameters in squares are for the square hub, and unmarked diameters are for the extended-diameter hubs.
 - The weight, moment of inertia and GD² are the values at maximum bore diameter for the round hub. Values in parentheses for the NEF02/04/45 apply to the extended-diameter hub. Values in parentheses for the NEF10/18/25 apply to the square hub.
 - The allowable axial displacement is based on the assumption that the angular misalignment is "0".
 - To prevent the clamp bolt from loosening, the square hub type uses a U-nut, while other types use a NYLOCK bolt.

Reference Number System (Example)

NEF18W - N25C X B30C

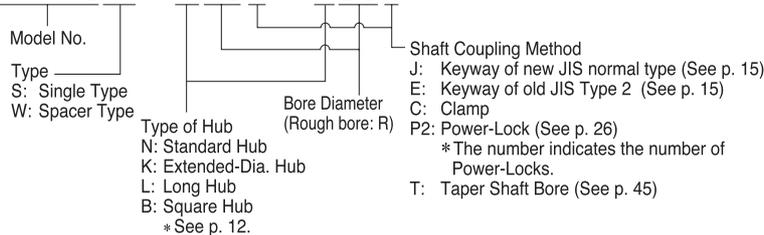

- *1: Indicate the smaller bore diameter first.
*2: Indicate the rough bore (symbol "R") first.

NEF Clamp Method

Clamp Transmission Torque

When coupling to a shaft, the clamp bolt should be tightened using a torque wrench to the appropriate torque listed below. Depending on the bolt size and bore diameter, the clamp transmission torque may be less than the allowable torque of the coupling. In this case, the clamp transmission torque represents the coupling transmission torque, so take caution in selecting the torque.

Clamp Shaft Bore Diameter and Torque

Model No.	Bore Diameter ϕ mm	10	11	12	14	15	16	17	18	19	20	22	24	25	28	30	32	35
NEF02	Bolt Size	M4	M4	M4	M4	M4	M4	M4	M4	M4	M4	M4	M4	M4				
	Tightening Torque N-m {kgf-m}	4.02 (0.41)	4.02 (0.41)	4.02 (0.41)	4.02 (0.41)	4.02 (0.41)	4.02 (0.41)	4.02 (0.41)	4.02 (0.41)									
	Transmission Torque N-m {kgf-m}	18.6 (1.90)	27.9 (2.85)	26.8 (2.73)	32.5 (3.32)	37.2 (3.80)	39.2 (4.00)	40.9 (4.17)	44.3 (4.52)	54.5 (5.56)	56.5 (5.77)	59.8 (6.10)	62.6 (6.39)	64.2 (6.55)				
NEF04	Bolt Size			M4	M4	M4	M4	M4	M4	M4	M4	M4	M4	M4				
	Tightening Torque N-m {kgf-m}			4.02 (0.41)	4.02 (0.41)	4.02 (0.41)												
	Transmission Torque N-m {kgf-m}			17.6 (1.8)	30.1 (3.07)	34.3 (3.5)	37.2 (3.8)	40.2 (4.1)	42.1 (4.3)	54.9 (5.6)	57.8 (5.9)	62.0 (6.33)	65.7 (6.7)	68.0 (6.94)				
NEF10	Bolt Size					M6	M6	M6	M6	M6	M6	M6	M6	M6	M6	M6	M6	M5
	Tightening Torque N-m {kgf-m}					13.7 (1.40)	13.7 (1.40)	13.7 (1.40)	13.7 (1.40)	13.7 (1.40)	13.7 (1.40)	13.7 (1.40)	8.33 (0.85)					
	Transmission Torque N-m {kgf-m}					85 (8.68)	94 (9.60)	103 (10.5)	110 (11.3)	113 (11.5)	119 (12.1)	127 (13.0)	163 (16.6)	177 (18.1)	181 (18.5)	189 (19.3)	182 (18.6)	146 (14.9)

Model No.	Bore Diameter ϕ mm	15	16	17	18	19	20	22	24	25	28	30	32	35	38	40	42	45	48	50	52	55
NEF18	Bolt Size	M6	M6	M6	M6	M6	M6	M6	M6	M6	M6	M6	M6	M6								
	Tightening Torque N-m {kgf-m}	13.7 (1.40)	13.7 (1.40)	13.7 (1.40)	13.7 (1.40)	13.7 (1.40)	13.7 (1.40)	13.7 (1.40)	13.7 (1.40)	13.7 (1.40)												
	Transmission Torque N-m {kgf-m}	68 (6.97)	83 (8.45)	90 (9.18)	100 (10.2)	109 (11.1)	113 (11.5)	126 (12.9)	136 (13.9)	143 (14.6)	188 (19.2)	196 (20.0)	202 (20.6)	213 (21.7)								
NEF25	Bolt Size									M8	M8	M8	M8	M8	M6	M6	M6					
	Tightening Torque N-m {kgf-m}									34.3 (3.50)	34.3 (3.50)	34.3 (3.50)	34.3 (3.50)	34.3 (3.50)	13.7 (1.40)	13.7 (1.40)	13.7 (1.40)					
	Transmission Torque N-m {kgf-m}									276 (28.2)	300 (30.6)	318 (32.4)	373 (38.1)	409 (41.7)	230 (23.5)	245 (25.0)	250 (25.5)					
NEF45	Bolt Size											M8	M8	M8	M8	M8	M8	M8	M8	M8	M8	M8
	Tightening Torque N-m {kgf-m}											34.3 (3.50)	34.3 (3.50)	34.3 (3.50)	34.3 (3.50)	34.3 (3.50)	34.3 (3.50)	34.3 (3.50)	34.3 (3.50)	34.3 (3.50)	34.3 (3.50)	34.3 (3.50)
	Transmission Torque N-m {kgf-m}											363 (37.0)	372 (38.0)	393 (40.1)	416 (42.4)	429 (43.8)	440 (44.9)	544 (55.5)	562 (57.3)	574 (58.6)	582 (59.4)	600 (61.2)





Boldface numbers indicate products in stock.

● Recommended shaft bore tolerance of clamp hub = h7

* Note: For ϕ 35 bore diameters, the recommended shaft bore tolerance is (+0.010 to 0) or (+0.010 to -0.015).

Single-Side Power-Lock: Single Type Couplings

NEF POWER-LOCK Series couplings offer machined shaft bores and incorporate a Power-Lock (friction coupling tool) and pressure flange set on one side, with the other side used for the keyway shaft bore. The Spacer Type can absorb all types of misalignment, while the single type coupling can handle all misalignments except for parallel misalignment.

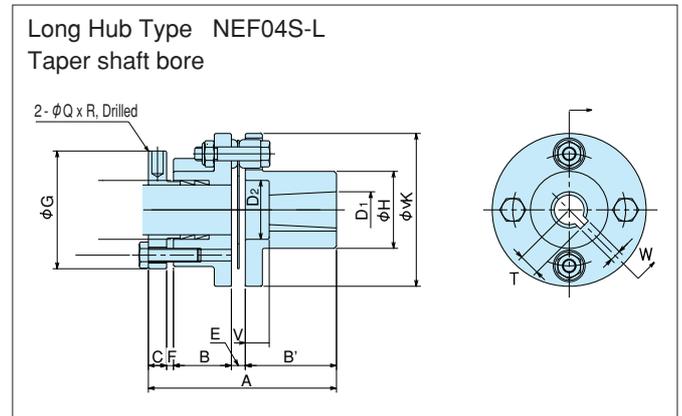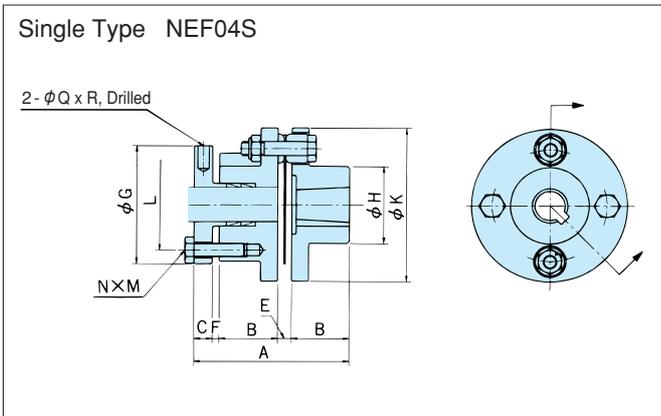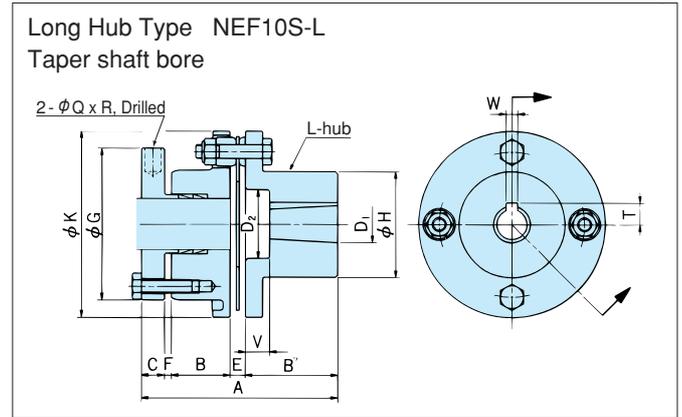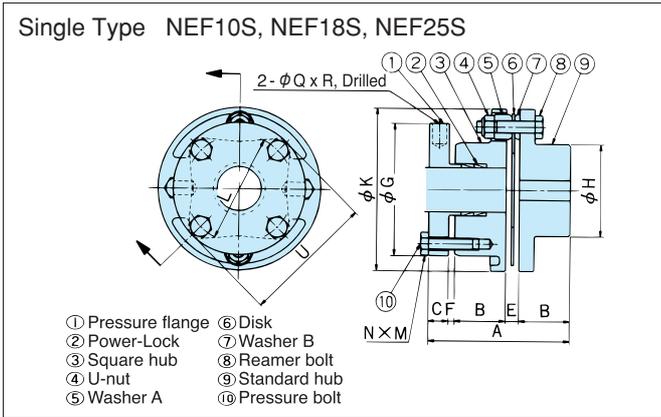

Unit: mm

Model No.	Allowable Torque N·m {kgf·m}	Torsional Stiffness r/min	Rough Bore	* Standard Stock Shaft Dia.	* Max. Shaft Dia.		Torsional Stiffness N·m/rad {kgf·m/rad}	Axial Spring Constant N/mm {kgf/mm}	A	B	C
					Power-Lock	Keyway					
NEF04S	39.2 { 4 }	20000	8	10-22	22	23	2.45×10^4 { 0.25×10^4 }	40.2 { 4.1 }	67.9	25.4	8
NEF10S	98 { 10 }	20000	10	14-35	35	32	8.8×10^4 { 0.9×10^4 }	58.8 { 6.0 }	70.4	25.4	10
NEF18S	176 { 18 }	18000	12	14-35	35	35	15.7×10^4 { 1.6×10^4 }	127 { 13 }	78.7	28.7	10
NEF25S	245 { 25 }	15000	15	18-42	42	42	25.5×10^4 { 2.6×10^4 }	157 { 16 }	93.2	33.5	12



Model No.	F	E	G	H	K	L	M	N	Q	R	U	Allowable Misalignment		Weight kg	Moment of Inertia kg·cm ²	GD ² {kgf·cm ² }
												Angular Misalignment deg	(Note) Axial Displacement			
NEF04S	3	6.1	52	34	67.5	40	M6 × 22 ℓ	4	5	10	—	1	± 0.8	0.76	2.85	{ 11.4 }
NEF10S	3	6.6	66	46	81	54	M6 × 22 ℓ	4	7	10	66	1	± 1.0	0.95	7.38	{ 29.5 }
NEF18S	3	8.3	66	51	93	54	M6 × 22 ℓ	4	7	10	68	1	± 1.2	1.5	14.5	{ 57.8 }
NEF25S	3	11.2	78	61	104	64	M8 × 28 ℓ	4	8	13	78.3	1	± 1.4	2.2	26	{ 104 }

Long Hub Type (Refer to the table above for transmission capacity and maximum shaft diameter.)

Model No.	A	B	C	E	F	B'	H	φ 16 1/10 Taper Shaft Bore					Long Hub Rough Bore Dia. φ	G	K
								D1	D2	V	T	W			
NEF04S-L	82.5	25.4	8	6.1	3	40	34	16	26	10.5	9.4 ^{+0.2} ₀	5E9 ^{+0.050} _{+0.020}	8	52	67.5
NEF10S-L	85	25.4	10	6.6	3	40	46		30					66	81

- Notes
- * Both the hub and the pressure flange have machined shaft bores for double Power-Locks within the standard stock shaft diameter range. Select a Power-Lock shaft diameter from the table on p. 31.
 - * The maximum shaft diameter includes a margin for mounting the Power-Lock.
 - The maximum rotation speed depends on the transmission capacity of the coupling. No balance adjustment has been conducted.
 - The weight, moment of inertia and GD² are the values at maximum bore diameter.
 - The allowable axial displacement is based on the assumption that the angular misalignment is "0".
 - NEF45 or larger sizes can be also manufactured with a Power-Lock. Contact for drawings.

Single-Side Power-Lock: Spacer Type Couplings

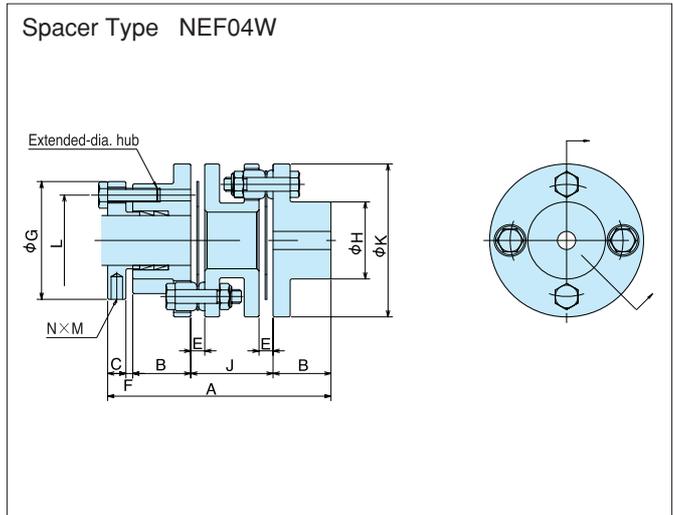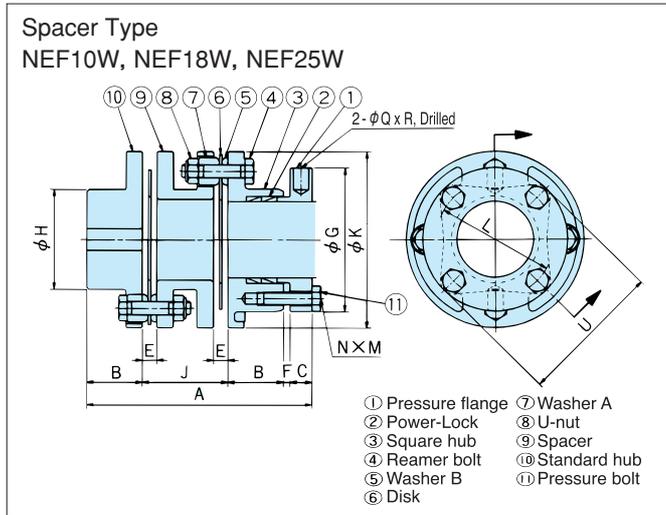

Spacer Type with Single-Side Power-Lock


Model No.	Allowable Torque N·m {kgf·m}	Max. Rotation Speed r/min	Rough Bore	* Standard Stock Shaft Dia.	* Max. Shaft Dia.		Torsional Stiffness N·m/rad {kgf·m/rad}	Axial Spring Constant N/mm {kgf/mm}	A	B	C
					Power- Lock	Keyway					
NEF04W	39.2 { 4 }	20000	8	10-22	22	23	1.18×10^4 { 0.12×10^4 }	20.6 {2.1}	97.8	25.4	8
NEF10W	98 {10}	20000	10	14-35	35	32	3.92×10^4 { 0.4×10^4 }	29.4 {3 }	102.8	25.4	10
NEF18W	176 {18}	18000	12	14-35	35	35	7.84×10^4 { 0.8×10^4 }	63.7 {6.5}	117.4	28.7	10
NEF25W	245 {25}	15000	15	18-42	42	42	12.7×10^4 { 1.3×10^4 }	78.4 {8 }	135	33.5	12

Model No.	F	E	G	H	J	K	L	M	N	Q	R	U	Allowable Misalignment			Weight kg	Moment of Inertia kg·cm ²	GD ² {kgf·cm ² }
													Angular Misalignment deg	Parallel Misalignment	(Note) Axial Displacement			
NEF04W	3	6.1	52	34	36	67.5	40	M6×22 ℓ	4	4	7	-	2	0.5	±1.6	1.2	6.2	{ 24.9 }
NEF10W	3	6.6	66	46	39	81	54	M6×22 ℓ	4	7	10	66	2	0.55	±2.0	1.6	13	{ 52 }
NEF18W	3	8.3	66	51	47	93	54	M6×22 ℓ	4	7	10	68	2	0.6	±2.4	2.5	26	{103 }
NEF25W	3	11.2	78	61	53	104	64	M8×28 ℓ	4	8	13	78.3	2	0.7	±2.8	3.4	44	{178 }

- Notes 1. * Both the hub and the pressure flange have machined shaft bores for double Power-Locks within the standard stock shaft diameter range. Select a Power-Lock shaft diameter from the table on p. 31.
2. * The maximum shaft diameter includes a margin for mounting the Power-Lock.
3. The maximum rotation speed depends on the transmission capacity of the coupling.
No balance adjustment has been conducted.
4. The weight, moment of inertia and GD² are the values at maximum bore diameter.
5. The allowable axial displacement is based on the assumption that the angular misalignment is "0".
6. NEF45 or larger sizes can be also manufactured with a Power-Lock. Contact for drawings.

Reference Number System (Example)


NEF10W - L16T X B30P2

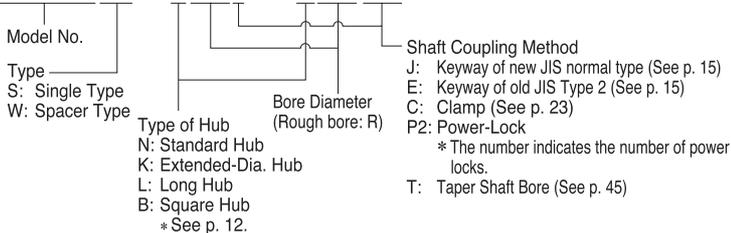

- *1: Indicate the smaller bore diameter first.
*2: Indicate the rough bore (symbol "R") first.

Dual-Side Power-Lock: Single Type couplings

- The dual-side Power-Lock couplings in the NEF POWER LOCK Series offer machined shaft bores and incorporate Power-Locks (friction coupling tools) and pressure flange sets on both sides, with shaft bores machined.
- This type of coupling is suitable for applications using servo motors.
- We maintain large stocks of products with a machined shaft bore. The Spacer Type can absorb all types of misalignment, while the single type coupling can handle all misalignments except for parallel misalignment.

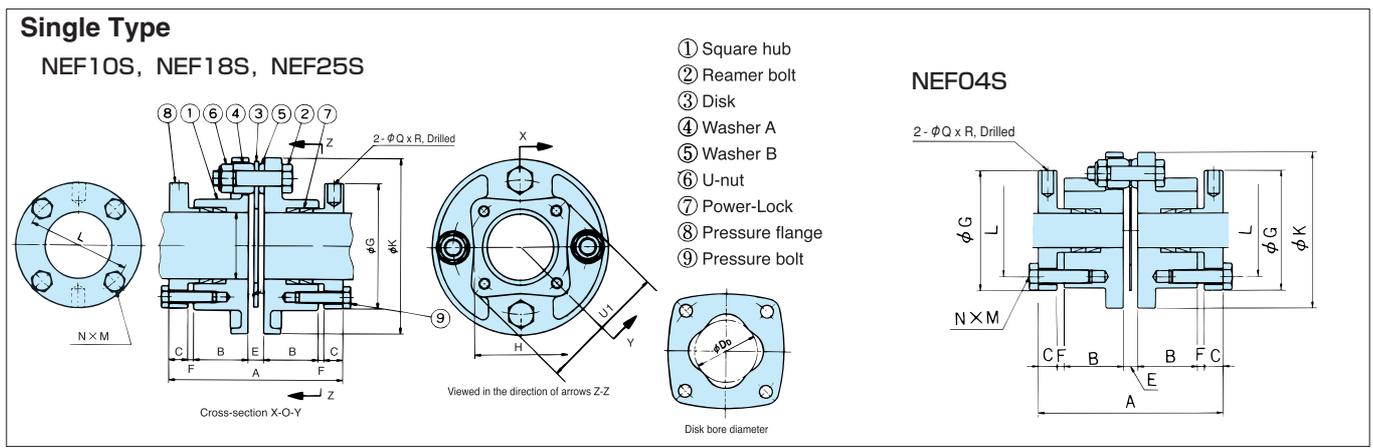

Unit: mm


Model No.	Allowable Torque N·m {kgf·m}	Max. Rotation Speed r/min	* Standard Stock Shaft Dia.	* Max. Shaft Dia.	Torsional Stiffness N·m/rad {kgf·m/rad}	Axial Spring Constant N/mm {kgf/mm}	A	B	C	D _b
NEF04S	39.2 { 4 }	20000	10-22	22	2.45×10^4 { 0.25×10^4 }	40.2 { 4.1 }	75.9	25.4	8	29
NEF10S	98 {10}	20000	14-35	35	8.8×10^4 { 0.9×10^4 }	58.8 { 6.0 }	83.4	25.4	10	37
NEF18S	176 {18}	18000	14-35	35	15.7×10^4 { 1.6×10^4 }	127 {13 }	91.7	28.7	10	39
NEF25S	245 {25}	15000	18-42	42	25.5×10^4 { 2.6×10^4 }	157 {16 }	108.2	33.5	12	45

Model No.	F	E	G	H	K	L	M	N	Q	R	U	Allowable Misalignment		Weight kg	Moment of Inertia kg·cm ²	GD ² {kgf·cm ² }
												Angular Misalignment deg	(Note) Axial Displacement			
NEF04S	3	6.1	52	—	67.5	40	M6 × 22 ℓ	4	5	10	—	1	± 0.8	0.9	3.0	{ 11.9 }
NEF10S	3	6.6	66	47	81	54	M6 × 22 ℓ	4	7	10	66	1	± 1.0	1.2	8.25	{ 33 }
NEF18S	3	8.3	66	49	93	54	M6 × 22 ℓ	4	7	10	68	1	± 1.2	1.7	14.8	{ 59 }
NEF25S	3	11.2	78	60	104	64	M8 × 28 ℓ	4	8	13	78.3	1	± 1.4	2.7	28.8	{ 115 }

- Notes 1. * Both the hub and the pressure flange have machined shaft bores for double Power-Locks within the standard stock shaft diameter range. Select a Power-Lock shaft diameter from the table on p. 31.
2. * The maximum shaft diameter includes a margin for mounting the Power-Lock.
3. The maximum rotation speed depends on the transmission capacity of the coupling. No balance adjustment has been conducted.
4. The weight, moment of inertia and GD² are the values at maximum bore diameter.
5. The allowable axial displacement is based on the assumption that the angular misalignment is "0".
6. NEF45 or larger sizes can be also manufactured with a Power-Lock. Contact for drawings.

Reference Number System (Example)

NEF18S - B30P2 X B35P2

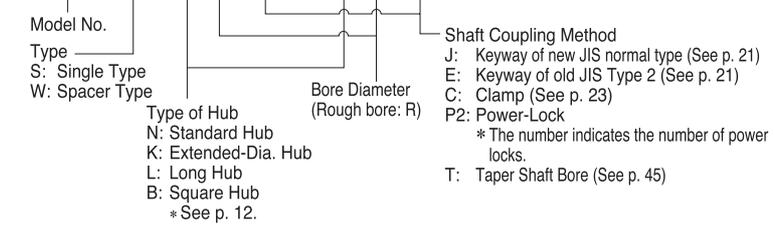


- *1: Indicate the smaller bore diameter first.
- *2: Indicate the rough bore (symbol "R") first.


Dual-Side Power-Lock: Spacer Type Couplings

Spacer Type NEF10W, NEF18W, NEF25W

- ① Pressure flange
- ② Power-Lock
- ③ Square hub
- ④ Spacer
- ⑤ U-nut
- ⑥ Washer A
- ⑦ Disk
- ⑧ Washer B
- ⑨ Reamer bolt
- ⑩ Pressure bolt

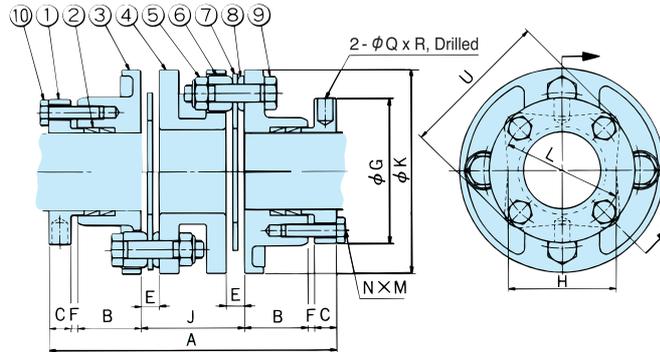

Spacer Type NEF04W

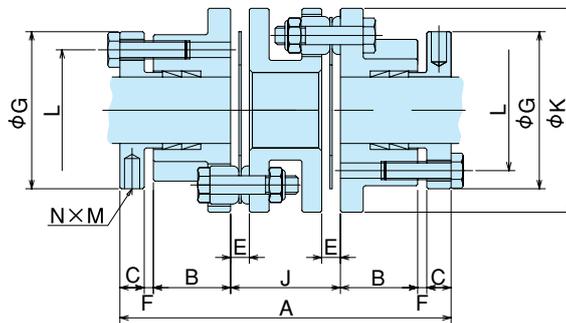

Unit: mm

Model No.	Allowable Torque N·m {kgf·m}	Max. Rotation Speed r/min	Rough Bore	* Standard Stock Shaft Dia.	* Max. Shaft Dia.	Torsional Stiffness N·m/rad {kgf·m/rad}	Axial Spring Constant N/mm {kgf/mm}	A	B	C	* D _D	F
NEF04W	39.2 { 4 }	20000	8	10-22	22	$1.18 \times 10^4 \{0.12 \times 10^4\}$	20.6 {2.1}	108.8	25.4	8	29	3
NEF10W	98 {10}	20000	10	14-35	35	$3.92 \times 10^4 \{0.4 \times 10^4\}$	29.4 {3 }	115.8	25.4	10	37	3
NEF18W	176 {18}	18000	12	14-35	35	$7.84 \times 10^4 \{0.8 \times 10^4\}$	63.7 {6.5}	130.4	28.7	10	39	3
NEF25W	245 {25}	15000	15	18-42	42	$12.7 \times 10^4 \{1.3 \times 10^4\}$	78.4 {8 }	150	33.5	12	45	3

Model No.	J	E	G	H	K	L	M	N	Q	R	U	Allowable Misalignment			Weight kg	Moment of Inertia kg·cm ²	GD ² {kgf·cm ² }
												Parallel Misalignment	Angular Misalignment deg	(Note) Axial Displacement			
NEF04W	36	6.1	52	—	67.5	40	M6 × 22 ℓ	4	4	7	—	0.5	2	±1.6	1.4	7.1	{ 28.3 }
NEF10W	39	6.6	66	47	81	54	M6 × 22 ℓ	4	7	10	66	0.55	2	±2.0	7.9	14	{ 58 }
NEF18W	47	8.3	66	49	93	54	M6 × 22 ℓ	4	7	10	68	0.6	2	±2.4	2.7	27	{109 }
NEF25W	53	11.2	78	60	104	64	M8 × 28 ℓ	4	8	13	78.3	0.7	2	±2.8	3.9	47	{189 }

- Notes
- * Both the hub and the pressure flange have machined shaft bores for double Power-Locks within the standard stock shaft diameter range. Select a Power-Lock shaft diameter from the table on p. 31.
 - * The maximum shaft diameter includes a margin for mounting the Power-Lock.
 - The maximum rotation speed depends on the transmission capacity of the coupling.
No balance adjustment has been conducted.
 - The weight, moment of inertia and GD² are the values at maximum bore diameter.
 - The allowable axial displacement is based on the assumption that the angular misalignment is "0".
 - NEF45 or larger sizes can be also manufactured with a Power-Lock. Contact for drawings.

Pressure Flange Set with Rough Bore


This pressure flange mounts a Power-Lock to a square hub (see p. 12) and is convenient for servo motor or ball screw applications.

The pressure flange set is comprised of special pressure flanges (2 pieces) and pressure bolts (8 pieces).

Use the pressure flange set together with the square hub.

(For NEF04, use the extended-diameter hub.)

The pressure bolts are specially designed to provide a tensile strength of 10.9.

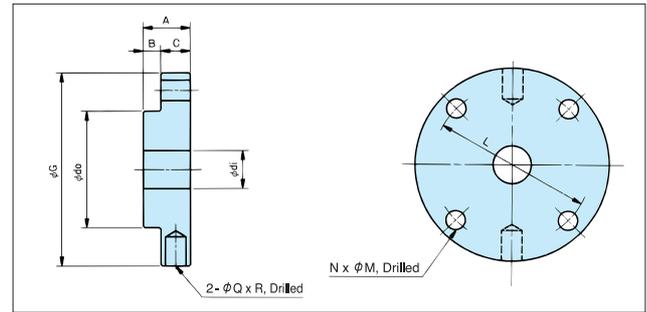

Unit: mm


Model No.	A	B	C	Rough Bore Dia.		G	L	N	M	Q	R	Compatible Shaft Dia.	Bolt Size/Quantity	Weight kg	Moment of Inertia kg · cm ²	GD ² {kgf·cm ² }
				di	do											
NEF04 -F	14	6	8	10.1	25.8	52	40	4	6.5	5	10	10-22	M6 x 22 l (10.9), 4 pcs.	0.14	0.48	{ 1.9 }
NEF10 -F	16	6	10	13.0	39.8	66	54	4	6.6	7	10	14-35	M6 x 22 l (10.9), 8 pcs.	0.40	2.75	{11 }
NEF18 -F																
NEF25 -F	18	6	12	18.2	47.8	78	64	4	9	8	13	18-42	M8 x 28 l (10.9), 8 pcs.	0.80	8.25	{33 }

- Notes 1. All models are in stock.
 2. The weight, moment of inertia and GD² are the values for one set, including the pressure flanges (maximum bore diameter) and pressure bolts.
 3. For recommended machining dimensions, see p. 44.

Power-Locks for NEF45 or larger sizes can be also machined. The extended-diameter hub is used for these sizes.

Reference Number System (Example)

NEF45W - K45P2 X K50P2

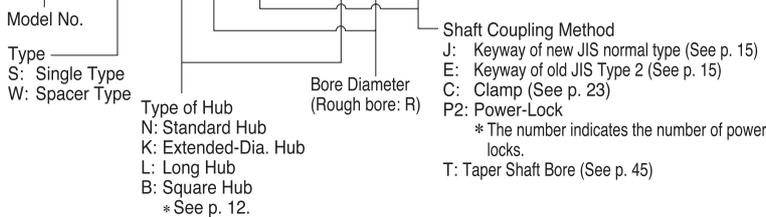

- *1: Indicate the smaller bore diameter first.
 *2: Indicate the rough bore (symbol "R") first.

Pressure Flange Dimensions for NEF45 or Larger Sizes

Unit: mm

Model No.	A	B	C	Finished Bore Dia.		G	L	N	M	Q	R	Compatible Shaft Dia.	Pressure Bolt	
				di	do								Size (Note)	Quantity
NEF 45 -F	23	8	15	See the "Recommended Shaft Bore Machining Methods" table on p. 44.	92	78	4	9	10	15	18-50	M 8 × 28 l (10.9)	4	
NEF 80 -F	24	8	16		104	88	4	11	12	15	20-60	M10 × 35 l (10.9)	4	
NEF130 -F	27	9	18		129	112	4	11	12	15	28-75	M10 × 40 l (10.9)	4	
NEF210 -F	29	9	20		147	127	4	11	14	20	35-85	M12 × 45 l (10.9)	4	

Note: (10.9) indicates the bolt strength rating.

For the relationship between the transmission torque for the Power-Lock Type couplings and each shaft bore diameter, see p. 31.

In addition to the EL Series Power-Lock Type couplings, other Power-Lock Types can be also manufactured. Contact us for details.

Combinations with Power-Lock

The following table lists the transmission torque of a single Power-Lock.

To use double or triple Power-Locks, multiply the transmission torque by the following factor:

Transmission torque of double Power-Locks = Transmission torque of a single Power-Lock x 1.55

Transmission torque of triple Power-Locks = Transmission torque of a single Power-Lock x 1.85

The tightening torque for pressure bolts is constant, regardless of the number of bolts.

The values in the table below apply to Power-Locks with a pressurized inner ring. Contact us to use a Power-Lock with a pressurized outer ring.

Shaft Dia.	Pressure Bolt Tightening Torque								Power-Lock Transmission Torque								
	N · m { kgf · m }								N · m { kgf · m }								
	NEF04 M6	NEF10 M6	NEF18 M6	NEF25 M8	NEF45 M8	NEF80 M10	NEF130 M10	NEF210 M12	Q'ty	NEF04	NEF10	NEF18	NEF25	NEF45	NEF80	NEF130	NEF210
10	3.97 { 0.40}								1	9.33 { 0.95}							
12	4.44 { 0.45}								1	14.7 { 1.5}							
13	4.80 { 0.49}								1	17.6 { 1.8}							
14	7.74 { 0.79}	7.74 { 0.79}	7.74 { 0.79}						1	30.4 { 3.1}	30.4 { 3.1}	30.4 { 3.1}					
15	8.72 { 0.89}	8.72 { 0.89}	8.72 { 0.89}						1	34.3 { 3.5}	35.3 { 3.6}	35.3 { 3.6}					
16	9.02 { 0.92}	9.02 { 0.92}	9.02 { 0.92}						1	39.2 { 4.0}	40.2 { 4.1}	40.2 { 4.1}					
17	9.21 { 0.94}	9.21 { 0.94}	9.21 { 0.94}						1	45.1 { 4.6}	45.1 { 4.6}	45.1 { 4.6}					
18	9.51 { 0.97}	9.51 { 0.97}	9.51 { 0.97}	12.9 { 1.32}	12.9 { 1.32}				1	50.0 { 5.1}	51.0 { 5.2}	51.0 { 5.2}	51.0 { 5.2}	50.0 { 5.1}			
19	10.9 { 1.11}	10.9 { 1.11}	10.9 { 1.11}	14.8 { 1.51}	14.8 { 1.5}				1	55.9 { 5.7}	56.8 { 5.8}	56.8 { 5.8}	56.8 { 5.8}	55.9 { 5.7}			
20	11.1 { 1.13}	11.1 { 1.13}	11.1 { 1.13}	15.1 { 1.54}	15.1 { 1.54}	18.7 { 1.91}			1	61.7 { 6.3}	62.7 { 6.4}	62.7 { 6.4}	62.7 { 6.4}	61.7 { 6.3}	62.7 { 6.4}		
22	9.70 { 0.99}	11.1 { 1.13}	11.1 { 1.13}	15.1 { 1.54}	15.1 { 1.54}	18.6 { 1.90}			1	63.7 { 6.5}	75.5 { 7.7}	75.5 { 7.7}	75.5 { 7.7}	75.5 { 7.7}	75.5 { 7.7}		
24		11.7 { 1.19}	11.7 { 1.19}	15.9 { 1.62}	15.9 { 1.62}	19.7 { 2.01}			1		90.2 { 9.2}	90.2 { 9.2}	90.2 { 9.2}	90.2 { 9.2}	90.2 { 9.2}		
25		12.4 { 1.27}	12.4 { 1.27}	17.0 { 1.73}	17.0 { 1.73}	21.0 { 2.14}			1		98.0 { 10.0}	98.0 { 10.0}	98.0 { 10.0}	97.0 { 9.9}	98.0 { 10.0}		
28		12.9 { 1.32}	12.9 { 1.32}	17.6 { 1.80}	17.5 { 1.79}	21.8 { 2.22}	21.8 { 2.22}		1		123 { 12.5}	123 { 12.5}	123 { 12.5}	123 { 12.5}	123 { 12.5}	123 { 12.5}	
30		13.0 { 1.33}	13.7 { 1.40}	19.1 { 1.95}	19.1 { 1.95}	23.6 { 2.41}	23.6 { 2.41}		1		129 { 13.2}	137 { 14.0}	141 { 14.4}	140 { 14.3}	141 { 14.4}	141 { 14.4}	
32		12.2 { 1.24}	13.7 { 1.40}	19.6 { 2.00}	19.9 { 2.03}	24.7 { 2.52}	24.7 { 2.52}		1		128 { 13.1}	148 { 15.1}	161 { 16.4}	160 { 16.3}	161 { 16.4}	161 { 16.4}	
35		10.5 { 1.07}	12.4 { 1.27}	24.9 { 2.54}	24.8 { 2.53}	30.8 { 3.14}	30.8 { 3.14}	36.5 { 3.73}	1		109 { 11.1}	136 { 13.9}	218 { 22.2}	217 { 22.1}	217 { 22.2}	217 { 22.2}	217 { 22.2}
36				26.0 { 2.65}	26.0 { 2.65}	32.2 { 3.28}	32.2 { 3.28}	38.2 { 3.90}	1				230 { 23.5}	230 { 23.5}	230 { 23.5}	230 { 23.5}	230 { 23.5}
38				25.9 { 2.64}	27.0 { 2.75}	33.4 { 3.41}	33.4 { 3.41}	39.7 { 4.05}	1				244 { 24.9}	256 { 26.1}	256 { 26.1}	256 { 26.1}	256 { 26.1}
40				27.9 { 2.85}	28.8 { 2.94}	36.0 { 3.68}	36.0 { 3.68}	46.5 { 4.75}	1				269 { 27.4}	279 { 28.5}	282 { 28.8}	284 { 29.0}	312 { 31.8}
42				24.9 { 2.54}	31.3 { 3.19}	38.6 { 3.94}	38.0 { 3.88}	49.5 { 5.05}	1				236 { 24.1}	316 { 32.3}	314 { 32.0}	308 { 31.4}	344 { 35.1}
45					34.3 { 3.50}	42.4 { 4.33}	40.6 { 4.15}	54.5 { 5.56}	1					327 { 33.3}	326 { 33.3}	307 { 31.3}	363 { 37.0}
48					34.3 { 3.50}	45.6 { 4.66}	42.7 { 4.36}	57.0 { 5.82}	1					356 { 36.4}	392 { 40.0}	359 { 36.6}	419 { 42.7}
50					34.3 { 3.50}	48.1 { 4.90}	44.2 { 4.51}	58.8 { 6.00}	1					376 { 38.4}	441 { 45.0}	396 { 40.4}	459 { 46.8}
55						55.0 { 5.61}	48.1 { 4.91}	63.3 { 6.45}	1						589 { 60.1}	499 { 50.9}	566 { 57.7}
56						59.0 { 6.02}	49.9 { 5.10}	65.2 { 6.65}	1						607 { 61.9}	487 { 49.7}	552 { 56.4}
60						62.6 { 6.39}	53.6 { 5.47}	69.2 { 7.06}	1						714 { 72.9}	586 { 59.8}	652 { 66.5}
63							56.7 { 5.78}	72.4 { 7.39}	1							669 { 68.3}	734 { 74.8}
65							58.8 { 6.00}	74.7 { 7.62}	1							729 { 74.4}	791 { 80.7}
70							67.1 { 6.84}	82.4 { 8.41}	1							879 { 89.7}	917 { 93.6}
75							67.6 { 6.90}	89.6 { 9.15}	1							924 { 94.3}	1060 { 109}
80								104 { 10.6}	1								1240 { 126}
85								116 { 11.8}	1								1550 { 158}

Note: Triple Power-Locks cannot be used for the following models and shaft diameter ranges.


Model No.	NEF04	NEF10	NEF18
Shaft Dia. Range	φ 14-22	φ 14-35	φ 22-35

* Values in for the NEF10, 18, 25 indicate shaft bore diameters in stock.
 For these sizes, use double Power-Locks.
 * For NEF10, 18, 25, use the square hub. For other sizes, use the extended-diameter hub.

● Recommended Shaft Diameter Tolerance of Power-Lock (φ 10-φ 38) h6
 (φ 40-) h8

NEH Series: Large-Size Spacer Type Couplings

NEH Series large-size Spacer Type couplings can be used for applications up to 176400 N·m {18000 kgf·m}.

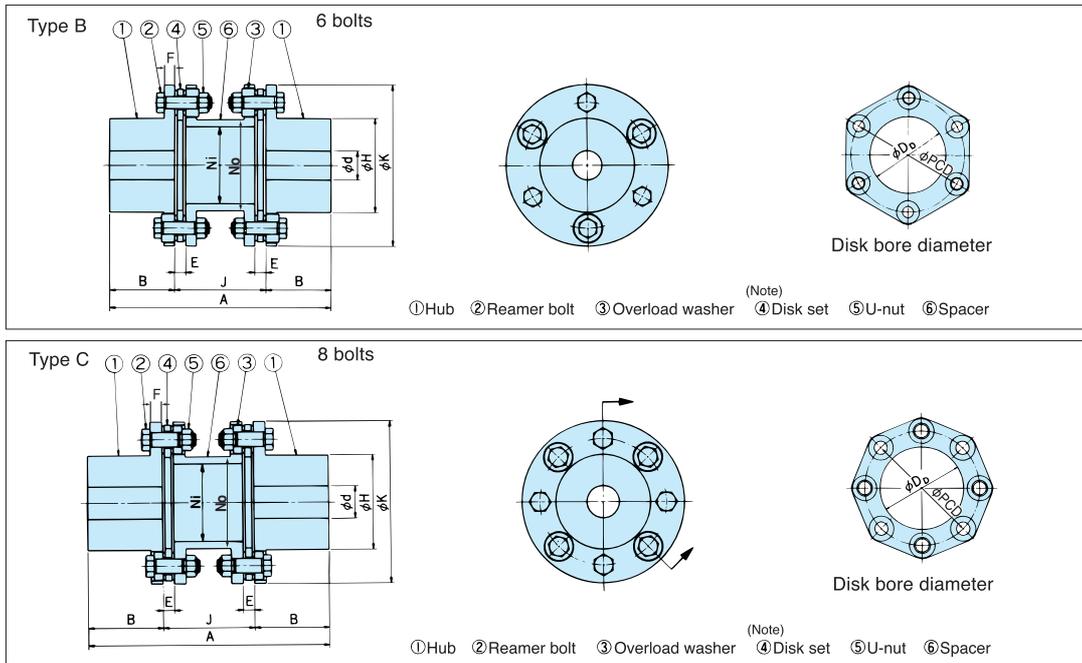

Note: The disk set is comprised of a disk, bush and collar. (See p. 5)

Unit: mm


Model No.	Type (Number of Bolts)	Allowable Torque N·m{kgf·m}	Max. Rotation Speed r/min	Rough Bore d	Max. Shaft Dia. φ		Torsional Stiffness N·m/rad{kgf·m/rad}	Axial Spring Constant N/mm{kgf/mm}
					Keyed Bore			
NEH 09W	B (6)	8820{ 900}	5000	70	111		51.9 × 10 ³ { 5.3 × 10 ³ }	627{ 64}
NEH 14W	C (8)	13700{ 1400}	4700	70	111		84.3 × 10 ³ { 8.6 × 10 ³ }	1380{141}
NEH 20W	C (8)	19600{ 2000}	4300	75	133		12.7 × 10 ⁴ { 1.3 × 10 ⁴ }	1370{140}
NEH 30W	C (8)	29400{ 3000}	3900	75	152		20.6 × 10 ⁴ { 2.1 × 10 ⁴ }	1700{183}
NEH 41W	C (8)	40200{ 4100}	3700	120	165		25.5 × 10 ⁴ { 2.6 × 10 ⁴ }	1880{192}
NEH 55W	C (8)	53900{ 5500}	3600	130	187		35.3 × 10 ⁴ { 3.6 × 10 ⁴ }	2087{213}
NEH 70W	C (8)	68600{ 7000}	3400	150	205		44.7 × 10 ⁴ { 4.6 × 10 ⁴ }	1920{196}
NEH 90W	C (8)	88200{ 9000}	3100	150	231		58.2 × 10 ⁴ { 5.9 × 10 ⁴ }	2078{212}
NEH110W	C (8)	107800{11000}	2900	190	254		73.8 × 10 ⁴ { 7.5 × 10 ⁴ }	2038{208}
NEH135W	C (8)	132300{13500}	2700	190	263		94.6 × 10 ⁴ { 9.7 × 10 ⁴ }	2254{230}
NEH150W	C (8)	147000{15000}	2500	210	275		10.0 × 10 ⁵ {10.2 × 10 ⁵ }	2450{250}
NEH180W	C (8)	176400{18000}	2400	210	289		12.2 × 10 ⁵ {12.4 × 10 ⁵ }	2666{272}

Model No.	PCD	A	B	E	F	H	J	K	D _B	N _i	N _o	Allowable Misalignment			Weight kg	Moment of Inertia kg·cm ²	GD ² {kgf·cm ² }
												Angular Misalignment deg	Parallel Misalignment	Axial Displacement			
NEH 09W	215	375	110	19.0	18	161	155	276	144	138	156	1.4	1.1	± 3.2	55	5000	{ 20000}
NEH 14W	215	409	127	19.0	20	161	155	276	155	132	156	1	1.1	± 2.1	61	5500	{ 22000}
NEH 20W	247	463	146	19.0	23	193	171	308	178	160	186	1	1.3	± 2.4	85	10300	{ 41000}
NEH 30W	279	517	165	21.5	25.5	218	187	346	201	180	210	1	1.4	± 2.8	125	18500	{ 74000}
NEH 41W	304	566	171	24.0	28	240	224	375	218	198	230	1	1.7	± 2.8	172	29300	{ 117000}
NEH 55W	355	720	225	29.5	35	272	270	445	252	228	260	1	2.0	± 3.6	293	64800	{ 259000}
NEH 70W	381	768	247	31.3	35	297	274	470	275	249	285	1	2.1	± 3.8	344	90800	{ 363000}
NEH 90W	419	843	278	32.0	39	334	287	511	304	280	320	1	2.2	± 4.3	456	144000	{ 574000}
NEH110W	457	902	305	32.5	42	364	292	556	343	296	340	1	2.2	± 4.8	575	215000	{ 859000}
NEH135W	482	945	317	34.0	47	382	311	587	350	312	360	1	2.4	± 5.0	696	290000	{1159000}
NEH150W	508	1005	331	34.5	49	399	343	629	368	325	375	1	2.6	± 5.6	826	390000	{1559000}
NEH180W	533	1050	347	35.5	53	419	356	654	380	340	390	1	2.8	± 5.7	954	506000	{2023000}

- Notes
- All sizes are custom-made.
 - The maximum rotation speed depends on the transmission capacity of the coupling.
No balance adjustment has been conducted. Contact us to adjust the balance for couplings at a high rotation speed.
 - The weight, moment of inertia and GD² are the values at maximum bore diameter (keyway).
 - Spacer lengths other than the standard length can be also manufactured. For details on the long spacer type, see p. 17.
 - The allowable axial displacement is based on the assumption that the angular misalignment is "0".
 - Check the key surface pressure in accordance with your operating conditions (see p. 18). The hub material is S45C.

Single-Side Adaptor Hub Type (A-Hub Type) / Unit Spacer Type (U-Type) Couplings

The NEH Series Adaptor Hub Type coupling provides a larger bore diameter than the standard hub. With the Unit Spacer Type, the spacer unit can be mounted or removed without the need to disassemble the disk connecting section.

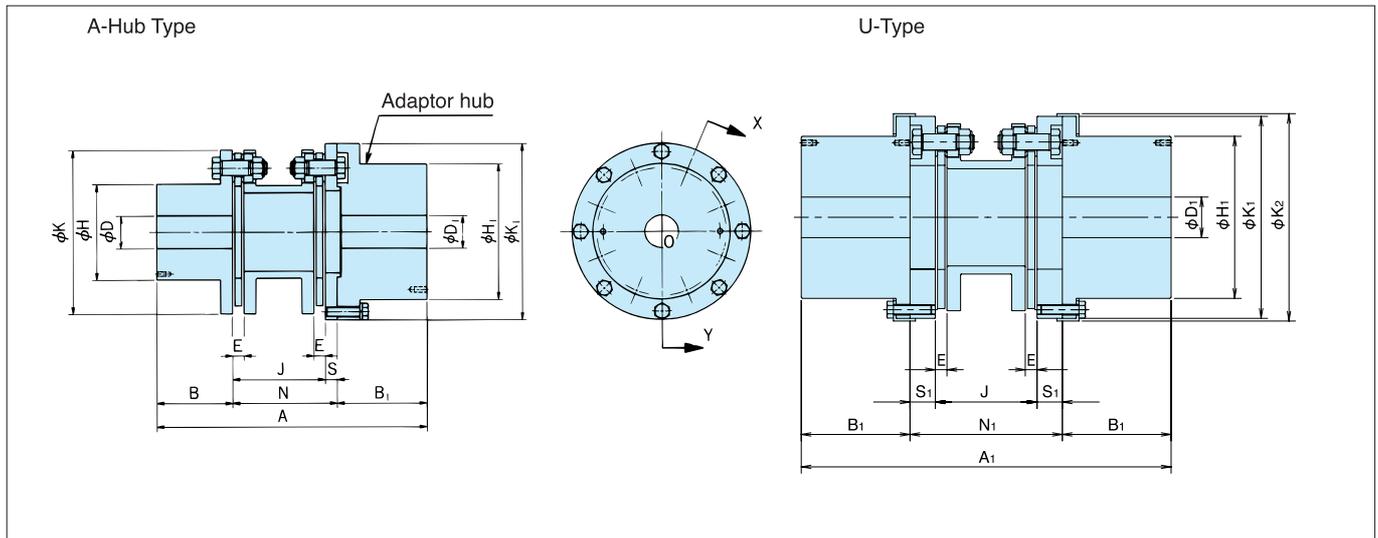

Unit: mm


Model No.	Allowable Torque N·m {kgf·m}	Max. Rotation Speed r/min	Standard Hub		Adaptor Hub		Torsional Stiffness N·m/rad {kgf·m/rad}	Axial Spring Constant N/mm {kgf/mm}	A	A ₁	B	B ₁	E	H	H ₁
			Rough Bore	Max. Shaft Dia. ϕD	Rough Bore	Max. Shaft Dia. ϕD_1									
NEH09W(U)	8820 { 900}	5000	70	111	50	158	5.19×10^6 { 5.3×10^6 }	627 { 64}	435	535	110	152	19	161	228
NEH14W(U)	13700 {1400}	4700	70	111	55	158	8.43×10^6 { 8.6×10^6 }	1380 {141}	452	531	127	150	19	161	228
NEH20W(U)	19600 {2000}	4300	75	133	65	182	1.27×10^7 { 1.3×10^6 }	1370 {140}	491	565	146	151	19	193	264
NEH30W(U)	29400 {3000}	3900	75	152	75	206	2.06×10^7 { 2.1×10^6 }	1790 {183}	577.5	680	165	200	21.5	218	300
NEH41W(U)	40200 {4100}	3700	120	165	80	224	2.55×10^7 { 2.6×10^6 }	1880 {192}	653	790	171	230	24	240	324

Model No.	J	K	K ₁	K ₂	N	N ₁	S	S ₁	Allowable Misalignment			Weight kg		Moment of Inertia kg·m ²		GD ² {kgf·m ² }	
									Angular Misalignment deg	Parallel Misalignment	Axial Displacement	A	U	A	U	A	U
NEH09W(U)	155	276	297	313	173	231	18	38	1.4	1.1	± 3.2	81	108	0.85	1.2	{ 3.4}	{ 4.8}
NEH14W(U)	155	276	297	313	175	231	20	38	1	1.1	± 2.1	88	115	0.93	1.3	{ 3.7}	{ 5.2}
NEH20W(U)	171	308	334	344	194	263	23	46	1	1.3	± 2.4	120	155	1.68	2.33	{ 6.7}	{ 9.3}
NEH30W(U)	187	346	374	384	212.5	280	25.5	46.5	1	1.4	± 2.8	177	230	3.05	4.23	{12.2}	{16.9}
NEH41W(U)	224	375	422	438	252	330	28	53	1	1.7	± 2.8	248	325	5.05	7.2	{20.2}	{28.8}

Notes 1. All sizes are custom-made.
2. When placing an order, contact for drawings.

Reference Number System (Example)


NEH14W - N100J X A120J

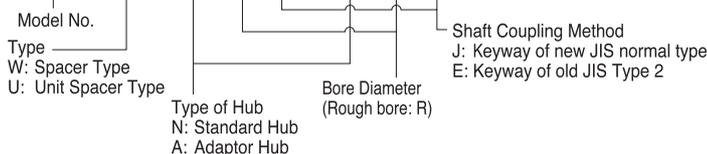

*1: Indicate the smaller bore diameter first.
*2: Indicate the rough bore (symbol "R") first.
*3: Unit Spacer Type (U-type) couplings cannot be combined with the adaptor hub (A-hub) type.

NEF Series: Gear Coupling (G-Type) Compatible Couplings

Through a reduction in the hub face distances (dimension "D"), the NEF-G Series G-Type coupling provides the same overall length and hub length as standard gear couplings. This makes the G-Type completely interchangeable with the standard gear couplings. Also, because there is no lubrication or man-hour costs involved, G-type couplings are ideal for TPM.

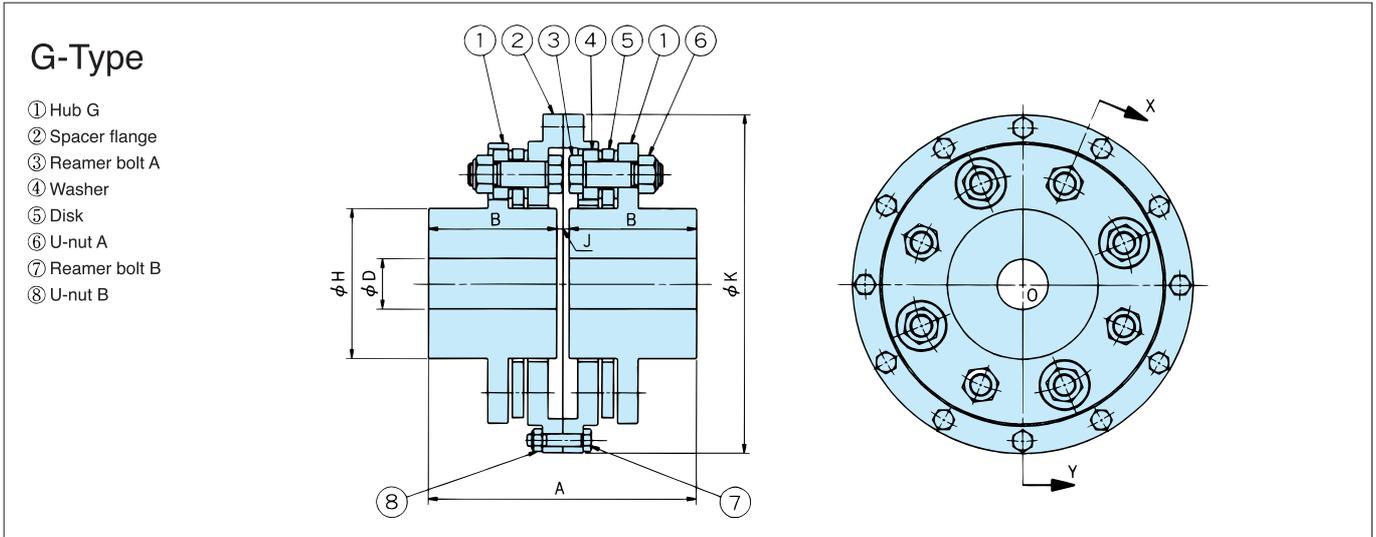


Unit: mm

Model No.	Allowable Torque N · m {kgf · m}	Max. Rotation Speed r/min	Max. Shaft Dia. D	A	B	H	J	K	Equivalent Gear Coupling		
									JIS Model	Max. Shaft Dia. ϕ	Torque N · m {kgf · m}
NEF 45G	441 { 45}	5000	32	88	40	47	8	161	100	25	196 { 20}
NEF 80G	784 { 80}	5000	40	98	45	57	8	184	112	32	392 { 40}
NEF130G	1270 { 130}	5000	48	108	50	69	8	207	125	40	784 { 80}
NEF210G	2060 { 210}	5000	55	134	63	80	8	245	140	50	1230 { 125}
NEF340G	3330 { 340}	5000	65	170	80	93	10	264	160	63	1760 { 180}
NEF540G	5290 { 540}	3400	75	190	90	106	10	306	180	71	2450 { 250}
NEF700G	6860 { 700}	3100	80	210	100	116	10	342	200	80	3480 { 355}
NEH 09G	8820 { 900}	3500	95	236	112	140	12	334	224	90	4900 { 500}
NEH 14G	13700 {1400}	3500	105	262	125	147	12	334	250	100	6960 { 710}
NEH 20G	19600 {2000}	3000	120	294	140	171	14	378	280	125	11000 {1120}
NEH 30G	29400 {3000}	2800	136	334	160	197	14	416	315	140	15700 {1600}
NEH 41G	40200 {4100}	2500	149	376	180	213	16	462	355	160	24500 {2500}

Notes 1. All sizes are custom-made.
2. When placing an order, contact for drawings. (With the NEF45G/80G/130G/210G/540G/700G, the reamer bolts protrude from the hub end faces.)

Reference Number System (Example)

NEF45G - GR X G30J

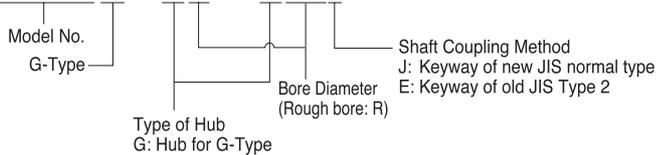

NEW PRODUCTS

EMER-FLEX COUPLING Electroless Nickel-Plated

PERFECT FIT!
For simple rust-proof applications (clean rooms, etc.)

**New products
at lower prices**

Ideal for rust-proof application in clean rooms!

Even more advanced high-precision coupling!



Disk: SUS304

U-nut: SUS304

Hub and spacer:
Electroless nickel-plated

Reamer bolt and washer:
Electroless nickel-plated


Features

- ▶ The hub and spacer are electroless nickel-plated for a beautiful finish and peel-proof quality.
- ▶ The allowable torque is the same as that for the standard type.
- ▶ Environmentally conscious, and complies with the RoHS Directive.

Applications

- ▶ Rust-proof applications in clean rooms
Suitable for applications which require a relatively low clean factor
- ▶ Drive for LCD panel transfer/lifting equipment.
- ▶ Other applications that require low-level or rust-proof environments.

Reference Number System

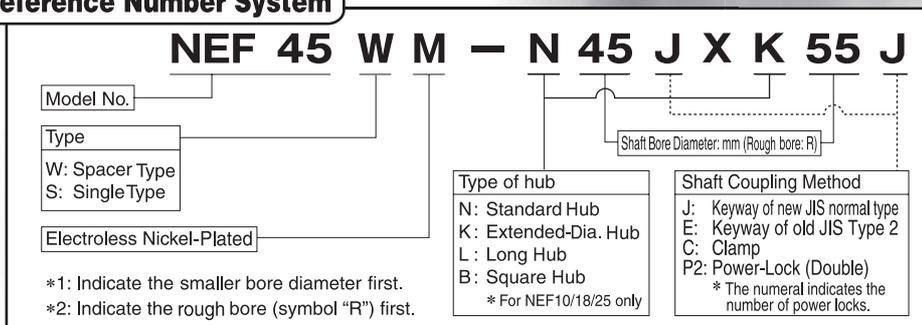

Compatible with various types

- Extended-Diameter and Long Hubs
- Clamp and Power-Lock Methods
- Long Spacer Types
(Contact the distributor for delivery times.)

OTHER TYPES OF COUPLINGS


● Environmentally Resistant (Electroless Nickel-Plated / Stainless Steel Type)

The disk on these couplings is made of stainless steel. Other parts, however, can be plated with electroless nickel, or made of stainless steel, for rust-proof application, as required. Contact for drawings.


● Various Power-Lock Types

The EL Series Power-Lock and pressure flange come standard as part of the Power-Lock specifications. Power-Locks are available for other types of couplings also.


① The SL Series Power-Lock enables clamping from outside of the hub.

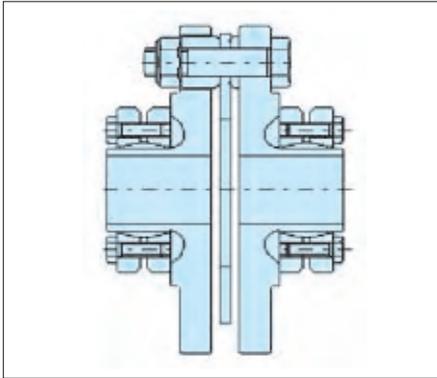

② The AS Series Power-Lock can reduce the axial dimension.

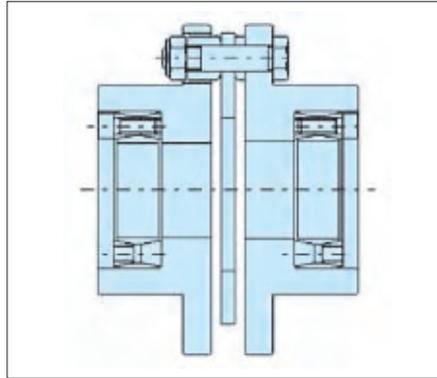

③ The TF Series Power-Lock can connect larger shaft diameters.

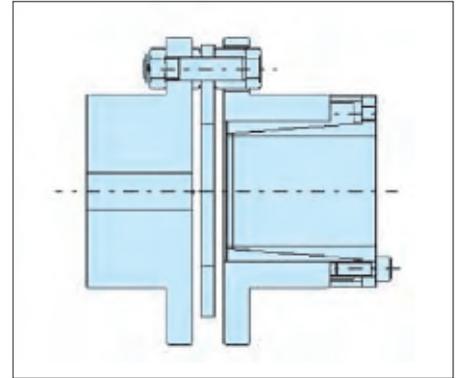


In addition to the above, other types of Power-Locks are also available. Contact for drawings.

● Single-Hub Insertion Type / Dual-Hub Insertion Type

Spacer Type couplings are suitable for applications where a shorter overall coupling length is desired.


① Single-Hub Insertion Type

With one hub mounted inside, the axial dimension can be reduced.

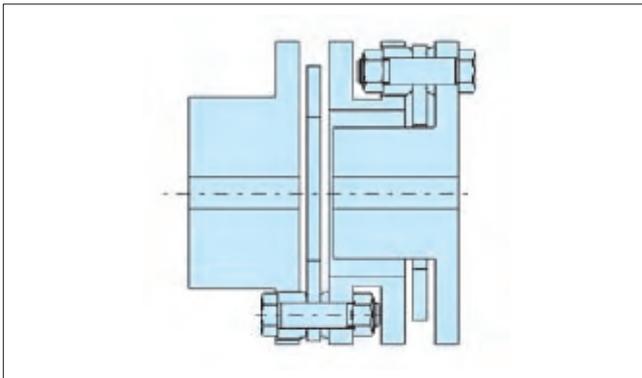

② Dual-Hub Insertion Type


With both hubs mounted inside, the axial dimension can be reduced even further.

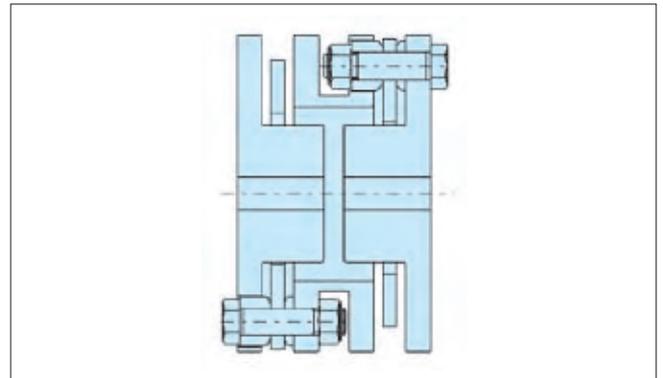

● Long Spacer High-Speed Type

When using a Long Spacer Type coupling at high rotation speeds, it is usually necessary to consider the critical rotation speed in order to avoid a resonance point. (See p. 9)

To avoid the critical rotation speed range, a larger size coupling may be selected. However, if the selection of a larger size is not an option, couplings with an increased spacer weight can be manufactured as shown below.

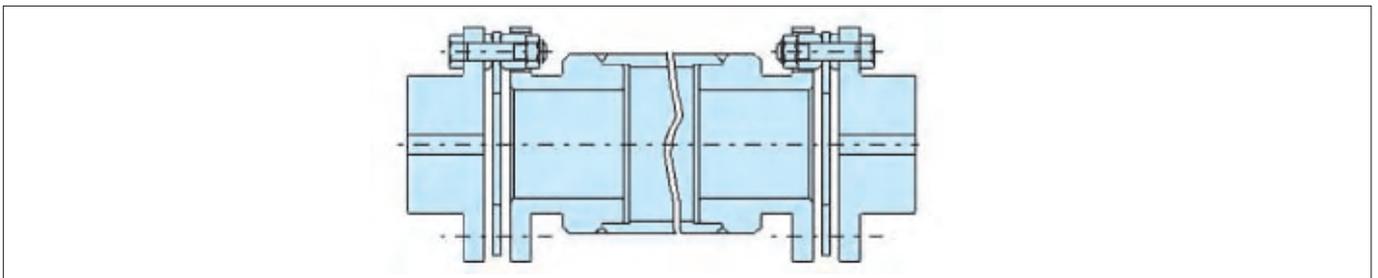


INSTALLATION

Centering Adjustment

① Single and Spacer Type Couplings

The more accurate the initial centering of the coupling, the less stress it will experience during operation. Wear of the shaft bearing, depressions in the mounting surface, changes in conditions affected by temperature and vibration can reduce the life of the coupling and your equipment. Center accurately and conduct periodic adjustment according to the following procedure.

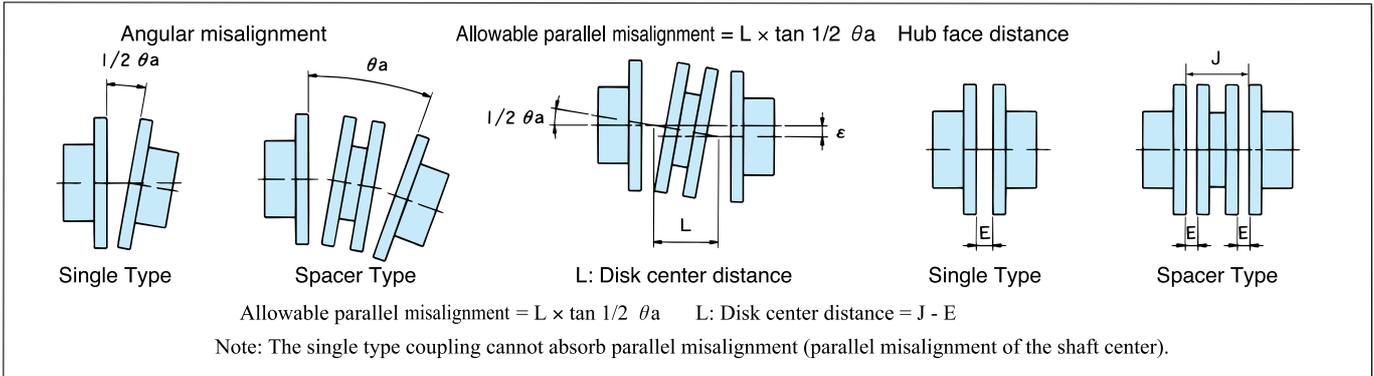


The allowable angular misalignment, parallel misalignment and hub face distance misalignment all act in correlation to each other. When one increases, the others decrease. These factors must, therefore, be considered together. Perform the initial centering adjustment carefully so that the following recommended value is not exceeded.

Table 1 Recommended Centering Value (Single Type Coupling)

Model No.	Angular Misalignment		Parallel Misalignment ϵ (mm)	Hub Face Distance Misalignment E (mm)
	$1/2 \theta a$ (deg)	Dial Reading T.I.R.mm		
NEF 02	0.25°	0.25	* Errors cannot be absorbed.	4.9 ± 0.25
NEF 04	0.25°	0.29		6.1 ± 0.25
NEF 10	0.25°	0.35		6.6 ± 0.25
NEF 18	0.25°	0.40		8.3 ± 0.25
NEF 25	0.25°	0.45		11.2 ± 0.25
NEF 45	0.25°	0.55		11.7 ± 0.25
NEF 80	0.25°	0.62		11.7 ± 0.25
NEF 130	0.25°	0.73		16.8 ± 0.25
NEF 210	0.25°	0.84		17.0 ± 0.25
NEF 340	0.25°	0.93		21.6 ± 0.25
NEF 540	0.25°	1.07		23.9 ± 0.25
NEF 700	0.25°	1.20	27.2 ± 0.25	

* The Single Type Coupling cannot absorb parallel misalignment, so the parallel misalignment should be set to within 0.02 mm during centering adjustment.

② Long Spacer Type

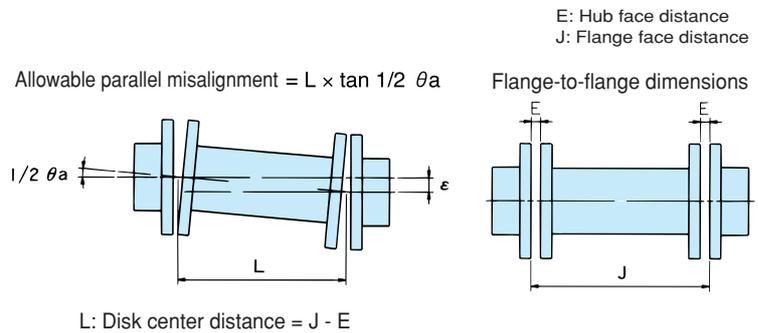

Recommended Centering Value (Spacer Type Coupling)

Model No.	Angular Misalignment		Parallel Misalignment ϵ (mm)	Hub Face Distance Misalignment E (mm)
	θa (deg)	Dial Reading T.I.R.mm		
NEF 02 W	0.5°	0.50	0.075	4.9 ± 0.25
NEF 04 W	0.5°	0.58	0.13	6.1 ± 0.25
NEF 10 W	0.5°	0.71	0.14	6.6 ± 0.25
NEF 18 W	0.5°	0.81	0.17	8.3 ± 0.25
NEF 25 W	0.5°	0.91	0.18	11.2 ± 0.25
NEF 45 W	0.5°	1.10	0.22	11.7 ± 0.25
NEF 80 W	0.5°	1.25	0.25	11.7 ± 0.25
NEF 130 W	0.5°	1.46	0.27	16.8 ± 0.25
NEF 210 W	0.5°	1.69	0.31	17.0 ± 0.25
NEF 340 W	0.5°	1.86	0.33	21.6 ± 0.25
NEF 540 W	0.5°	2.14	0.37	23.9 ± 0.25
NEF 700 W	0.5°	2.41	0.46	27.2 ± 0.25
NEH 09 W	0.35°	1.68	0.30	19.0 ± 0.25
NEH 14 W	0.25°	1.20	0.30	19.0 ± 0.25
NEH 20 W	0.25°	1.34	0.33	19.0 ± 0.25
NEH 30 W	0.25°	1.50	0.36	21.5 ± 0.25
NEH 41 W	0.25°	1.64	0.43	24.0 ± 0.25
NEH 55 W	0.25°	1.94	0.50	29.5 ± 0.25
NEH 70 W	0.25°	2.05	0.51	31.3 ± 0.25
NEH 90 W	0.25°	2.23	0.55	32.0 ± 0.25
NEH110 W	0.25°	2.43	0.55	32.5 ± 0.25
NEH135 W	0.25°	2.56	0.60	34.0 ± 0.25
NEH150 W	0.25°	2.74	0.65	34.5 ± 0.25
NEH180 W	0.25°	2.85	0.70	35.5 ± 0.25

Table 2 Recommended Centering Value (Long Spacer Types)

Model No.	Angular Misalignment		Parallel Misalignment ϵ (mm)	Hub Face Distance Misalignment E (mm)
	θa (deg)	Dial Reading T.I.R.mm		
NEF 04 W	0.5°	0.58	$L \times 0.43 \times 10^{-2}$	6.1 ± 0.25
NEF 10 W	0.5°	0.71	$L \times 0.43 \times 10^{-2}$	6.6 ± 0.25
NEF 18 W	0.5°	0.81	$L \times 0.43 \times 10^{-2}$	8.3 ± 0.25
NEF 25 W	0.5°	0.91	$L \times 0.43 \times 10^{-2}$	11.2 ± 0.25
NEF 45 W	0.5°	1.10	$L \times 0.43 \times 10^{-2}$	11.7 ± 0.25
NEF 80 W	0.5°	1.25	$L \times 0.43 \times 10^{-2}$	11.7 ± 0.25
NEF 130 W	0.5°	1.46	$L \times 0.43 \times 10^{-2}$	16.8 ± 0.25
NEF 210 W	0.5°	1.69	$L \times 0.43 \times 10^{-2}$	17.0 ± 0.25
NEF 340 W	0.5°	1.86	$L \times 0.43 \times 10^{-2}$	21.6 ± 0.25
NEF 540 W	0.5°	2.14	$L \times 0.43 \times 10^{-2}$	23.9 ± 0.25
NEF 700 W	0.5°	2.41	$L \times 0.43 \times 10^{-2}$	27.2 ± 0.25
NEH 09 W	0.35°	1.68	$L \times 0.31 \times 10^{-2}$	19.0 ± 0.25
NEH 14 W	0.25°	1.20	$L \times 0.22 \times 10^{-2}$	19.0 ± 0.25
NEH 20 W	0.25°	1.34	$L \times 0.22 \times 10^{-2}$	19.0 ± 0.25
NEH 30 W	0.25°	1.50	$L \times 0.22 \times 10^{-2}$	21.5 ± 0.25
NEH 41 W	0.25°	1.64	$L \times 0.22 \times 10^{-2}$	24.0 ± 0.25
NEH 55 W	0.25°	1.94	$L \times 0.22 \times 10^{-2}$	29.5 ± 0.25
NEH 70 W	0.25°	2.05	$L \times 0.22 \times 10^{-2}$	31.3 ± 0.25
NEH 90 W	0.25°	2.23	$L \times 0.22 \times 10^{-2}$	32.0 ± 0.25
NEH 110 W	0.25°	2.43	$L \times 0.22 \times 10^{-2}$	32.5 ± 0.25
NEH 135 W	0.25°	2.56	$L \times 0.22 \times 10^{-2}$	34.0 ± 0.25
NEH 150 W	0.25°	2.74	$L \times 0.22 \times 10^{-2}$	34.5 ± 0.25
NEH 180 W	0.25°	2.85	$L \times 0.22 \times 10^{-2}$	35.5 ± 0.25

Gear Coupling Compatible Type


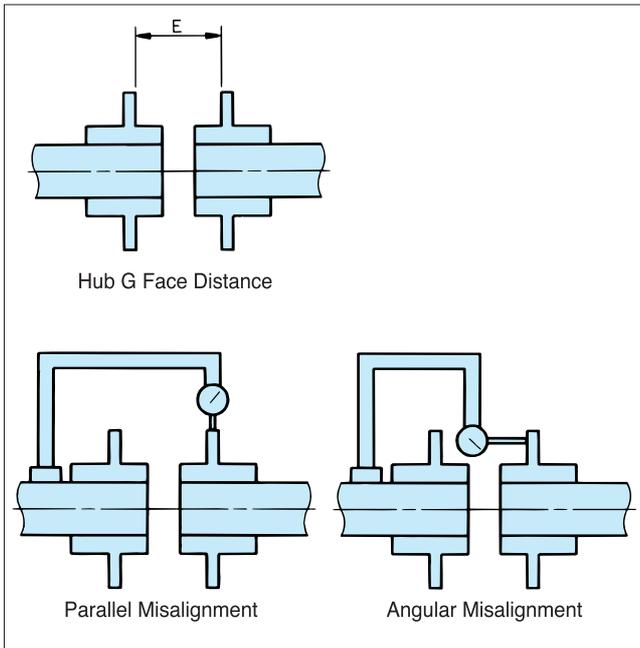



Table 3 Recommended Centering Value (Gear Coupling Compatible Type)

Model No.	Angular Misalignment		Parallel Misalignment ϵ (mm)	Hub Face Distance Misalignment E (mm)
	θ (deg)	Dial Reading T.I.R.mm		
NEF45G	0.5°	1.05	0.20	61.4 ± 0.50
NEF80G	0.5°	1.20	0.23	68.4 ± 0.50
NEF130G	0.5°	1.45	0.25	78.6 ± 0.50
NEF210G	0.5°	1.65	0.30	88.0 ± 0.50
NEF340G	0.5°	1.85	0.30	97.2 ± 0.50
NEF540G	0.5°	2.15	0.38	112.8 ± 0.50
NEF700G	0.5°	2.40	0.45	136.4 ± 0.50
NEH09G	0.35°	1.68	0.25	109.0 ± 0.50
NEH14G	0.25°	1.20	0.18	107.0 ± 0.50
NEH20G	0.25°	1.35	0.20	121.6 ± 0.50
NEH30G	0.25°	1.50	0.23	128.0 ± 0.50
NEH41G	0.25°	1.63	0.25	143.0 ± 0.50

Relationship between Parallel Misalignment and Angular Misalignment for the Spacer Type Coupling

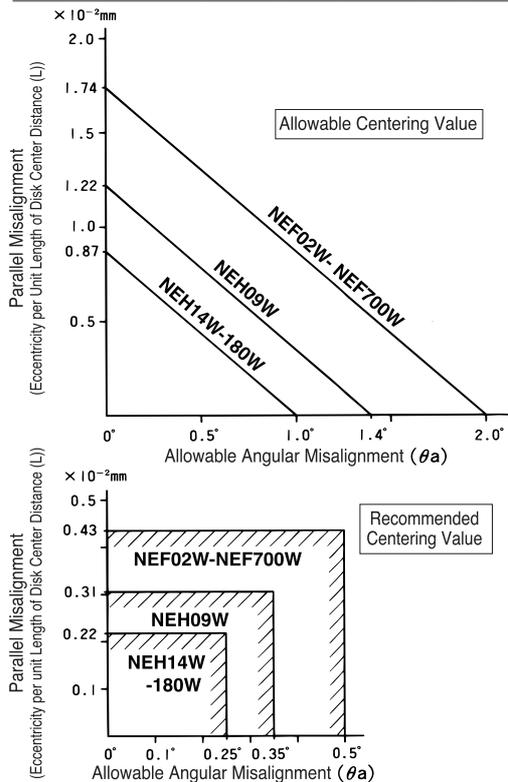


① Adjusting the hub-to-hub dimension "E"

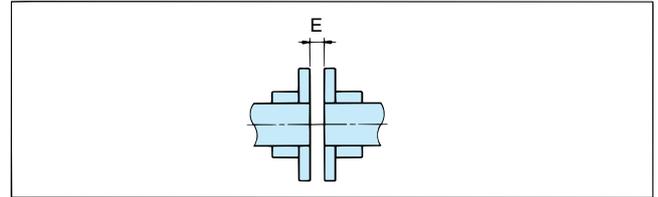


For both the Spacer Type and Single Type couplings, measure dimension "E" at four places (at 90° angles), and adjust the hub position so that the average value of dimension "E" is within ±0.25 mm. When a stepped shaft is used for both the drive and driven shafts, the margin for adjustment may be limited. In this case, give consideration in advance so that dimension "E" can be adjusted.

② Adjusting the angular misalignment (θ)

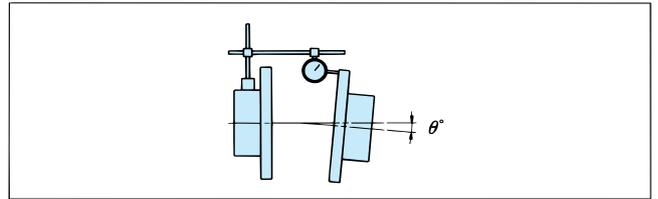

- With a dial gauge fixed to one of the hubs as shown above, rotate the hub to find the minimum indication on the dial gauge, and set that to "0".
- Rotate the hub with the dial gauge 360°, and read the value for the angular misalignment.
- Move the equipment with a shim until the reading on the dial gauge is within the recommended angular misalignment range specified in Table 1.

③ Adjusting the parallel misalignment " ϵ " (mm)

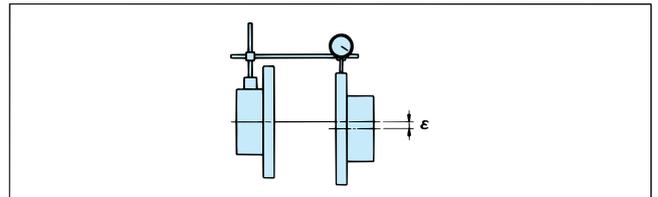

- With a dial gauge fixed to the hub flange as shown above, rotate the hub to find the minimum indication on the dial gauge, and set that to "0".
- Rotate the hub with the dial gauge 360°, and read the value for the parallel misalignment.
- The reading on the dial gauge around the periphery of the hub flange may fluctuate markedly at the hub's drilled bore. This is because the flange is displaced toward the periphery while machining the drilled bore. When reading the dial gauge, disregard the values at such locations.
- Move the equipment with a shim until the reading on the dial gauge is within twice the recommended parallel misalignment " ϵ " range specified in Table 1.
- If the equipment is moved for the purpose of parallel misalignment adjustment, perform the angular misalignment adjustment procedure once again.

④ Repeat the above adjustment procedures until all of the coupling's displacement values are acceptable.

⑤ Tighten all U-nuts with the torque specified in Table 4 (p. 39). EMER-FLEX couplings transmit torque via the friction force that is generated between the disk and washer through the U-nut tightening force. Be sure to follow the tightening torque specified in Table 4 (p. 39).

INSTALLATION

1. Reamer Bolt Tightening Torque

EMER-FLEX couplings transmit torque via the friction force between the reamer bolt and the U-nut. Tighten the reamer bolts and U-nuts securely with the specified torque.

However, NES Series couplings are delivered as a completed assembly; never loosen the hexagon socket head bolt that fastens the disk.

Table 4 NEF Series (except G type)


Model No.	Reamer Bolt Tightening Torque N·m {kgf·m}	Reamer Bolt Size
NEF 02	4.90 { 0.5 }	M 5
NEF 04	8.82 { 0.9 }	M 6
NEF 10	8.82 { 0.9 }	M 6
NEF 18	21.6 { 2.2 }	M 8
NEF 25	21.6 { 2.2 }	M 8
NEF 45	41.2 { 4.2 }	M10
NEF 80	78.4 { 8.0 }	M12
NEF130	78.4 { 8.0 }	M12
NEF210	177 { 18.1 }	M16
NEF340	177 { 18.1 }	M16
NEF540	470 { 48.0 }	M20
NEF700	657 { 67.0 }	M24
NEH 09	470 { 48.0 }	M20
NEH 14	568 { 58.0 }	M22
NEH 20	784 { 80.0 }	M24
NEH 30	1170 { 119.0 }	M27
NEH 41	1590 { 162.0 }	M30
NEH 55	2254 { 230 }	M36
NEH 70	2548 { 260 }	M36
NEH 90	3234 { 330 }	M39
NEH110	3920 { 400 }	M42
NEH135	4900 { 500 }	M45
NEH150	5488 { 560 }	M48
NEH180	6860 { 700 }	M52

Gear Coupling Compatible Type

Model No.	Reamer Bolt (A) Tightening Torque N·m {kgf·m}	Size of Reamer Bolt (A)	Reamer Bolt (B) Tightening Torque N·m {kgf·m}	Size of Reamer Bolt (B)
NEF 45G	41.2 { 4.2 }	M10	8.82 { 0.9 }	M 6
NEF 80G	78.4 { 8.0 }	M12	21.6 { 2.2 }	M 8
NEF130G	78.4 { 8.0 }	M12	21.6 { 2.2 }	M 8
NEF210G	177 { 18.1 }	M16	41.2 { 4.2 }	M10
NEF340G	177 { 18.1 }	M16	41.2 { 4.2 }	M10
NEF540G	470 { 48.0 }	M20	78.4 { 8.0 }	M12
NEF700G	657 { 67.0 }	M24	78.4 { 8.0 }	M12
NEH 09G	470 { 48.0 }	M20	78.4 { 8.0 }	M12
NEH 14G	568 { 58.0 }	M22	78.4 { 8.0 }	M12
NEH 20G	784 { 80.0 }	M24	177 { 18.1 }	M16
NEH 30G	1170 { 119.0 }	M27	177 { 18.1 }	M16
NEH 41G	1590 { 162.0 }	M30	470 { 48.0 }	M20

Reamer Bolt Face-to-Face Dimensions

Size	M5	M6	M8	M10	M12	M16	M20	M22	M24	M27	M30
S	8	10	13	17	19	24	30	32	36	41	46



2. Tightening the Reamer Bolt

When tightening the reamer bolts, be careful not to apply an axial force to the coupling hub.


If an axial force is applied to the hub, the disk may warp and become fixed in that warped state. Tighten the reamer bolts securely with the torque specified in the table above.

● Pressure Bolt Tightening Torque

The pressure bolt tightening torque varies depending on the coupling model number and the Power-Lock size (shaft diameter). Tighten the pressure bolt with the proper torque listed in the “Combinations with Power-Lock” table on p. 31.

● The U-nut is made of metal. It can be mounted and dismantled up to 20 times.

If you will need to mount and dismount the U-nut more than 20 times, keep a spare U-nut on hand.

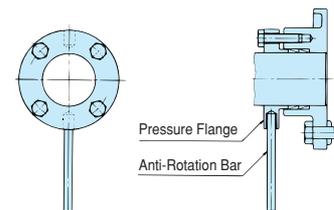

3. Anti-Rotation Hole



With the Power-Lock type coupling, anti-rotation holes are provided in the pressure flange, allowing the pressure bolt and reamer bolt to be easily tightened. The bolts can be easily mounted using an anti-rotation bar.

4. Removing the Coupling

The Spacer Type coupling can be removed from the shaft without running the drive or driven equipment. This feature considerably simplifies centering adjustment when re-mounting the coupling.

<Removal Procedure>

1. Loosen all reamer bolts and remove the disks and spacers. (Fig. 1)
2. Loosen the set bolt that fastens the hub, and then slide the hub off to remove it. (Fig. 2)
3. To re-mount the coupling, perform the above steps in reverse order. After both hubs are mounted to the shaft, it is recommended that you check the centering level to verify the mounting state.

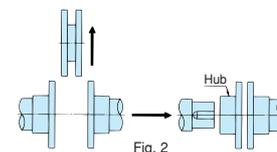

5. Inspection

After operating the equipment for one or two hours, check the angular misalignment and the parallel misalignment once again. At this time, re-tighten the bolts and nuts with the torque specified in the table above.

Once the equipment has been in operation for 6 months or one year, check the U-nuts for looseness. It is recommended that you mark the reamer bolts and U-nuts at the time of installation so that you can check for looseness later on. Be sure to check for any abnormalities in other components as well.

Installing NES Series couplings

1. Installing the Coupling

Read the instruction manual carefully to understand the proper method of handling couplings. Since NES Series EMER-FLEX couplings are delivered as a completed assembly (finished bore), the coupling can be directly mounted to your equipment. Mount the coupling to the shaft according to the following procedure.

When mounting the coupling, be careful not to apply excess force to the coupling, and be sure not to drop the coupling. Never loosen the hexagon socket head bolt that fastens the disk.



2. Mounting the Coupling to a Shaft

- ① Use a cloth to wipe any dust and oil completely off the surface of the target shaft and the coupling mounting surface.
- ② Perform the shaft centering adjustment procedure and mount the coupling to the shaft.

The allowable angular misalignment, allowable parallel misalignment and allowable axial displacement all act in correlation to each other. When one increases, the others decrease. These factors must, therefore, be considered together. Perform the centering adjustment while referring to the following instructions.



<When Using the Spacer Type>

Convert the parallel misalignment into an angular misalignment (Graph 1).

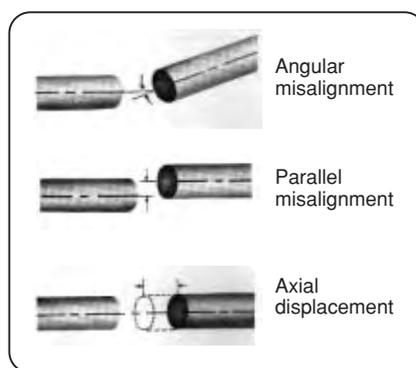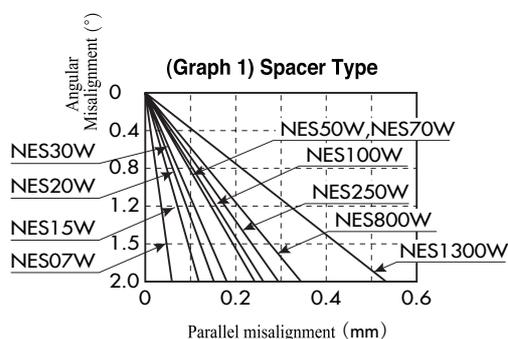

Apply the total of the converted value and angular misalignment to the angular misalignment shown in Graph 2.

Adjust the centering condition so that the misalignment does not exceed the range specified for each size.

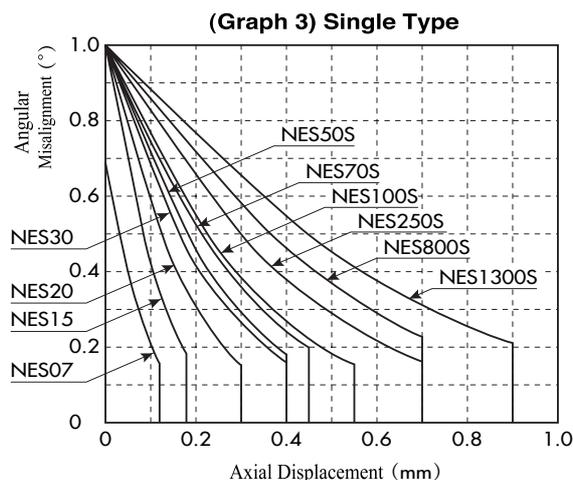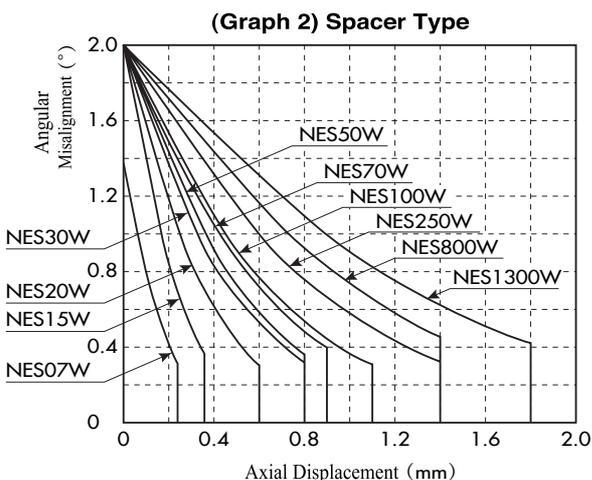

<When Using the Single Type>

The capacity of the Single Type Coupling to absorb a parallel misalignment is extremely small. Therefore, the centering adjustment should be conducted mainly to correct any angular misalignment and axial displacement.

Graph 3 shows the correlation between the coupling's allowable angular misalignment and allowable axial displacement.

Adjust the centering condition so that the misalignment does not exceed the range specified for each size.

- ③ Make sure that the mounted coupling can be moved in the rotating and axial directions with only a light force when the clamp bolt is loosened. If the coupling cannot be moved smoothly, re-adjust the centering condition in Step ②.
- ④ Tighten the clamp bolt with the torque specified in Table 5.

Then, insert the shaft all the way until it reaches the clamp hub end face.


Table 5

Model No.	Clamp Bolt Size	Tightening Torque N·m {kgf·m}
NES07	M2	0.50 {0.04}
NES15	M2	0.50 {0.04}
NES20	M2.5	1.0 {0.10}
NES30	M2.5	1.0 {0.10}
NES50	M3	1.9 {0.19}
NES70	M3	1.9 {0.19}
NES100	M4	3.8 {0.39}
NES250	M4	3.8 {0.39}
NES800	M6	12 {1.22}
NES1300	M6	12 {1.22}


BORE SPECIFICATIONS

Spacer Type


NEF Series

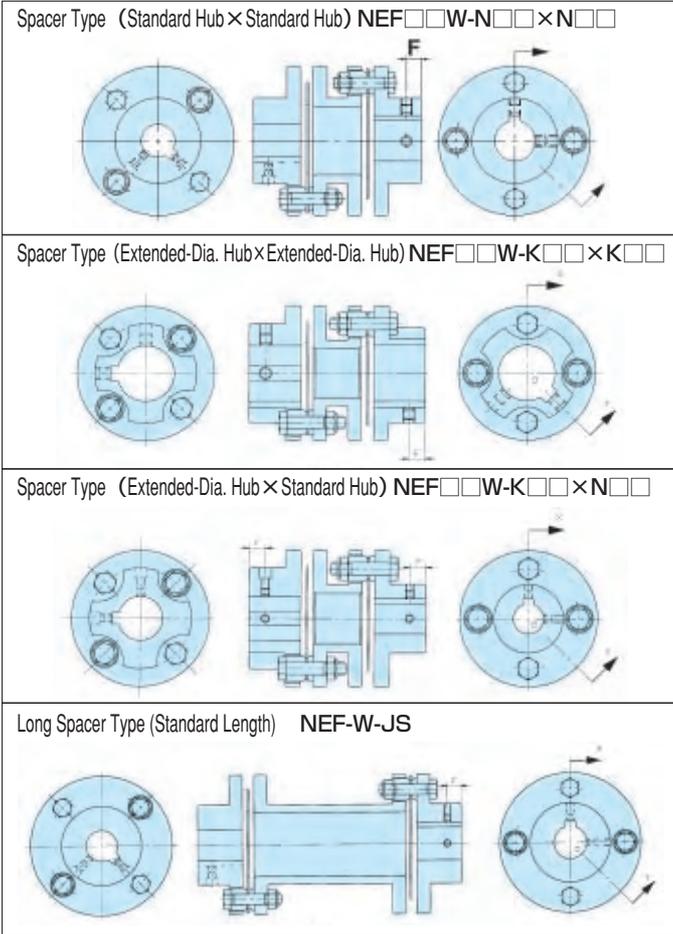

NEH Series

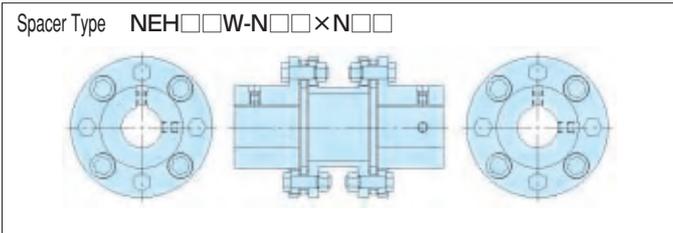

Single Type

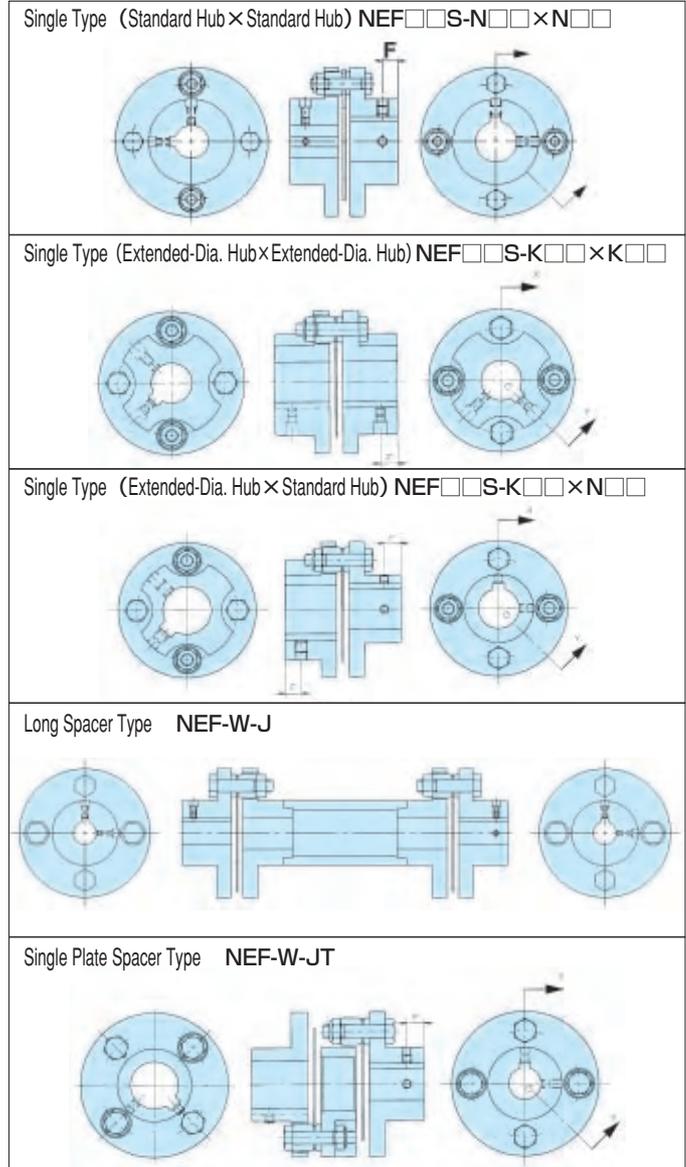

[General Matching of the Keyway Angles]

When machining shaft bores at Tsubaki, the angle of the keyway in the right and left hubs may be misaligned as shown above.

Hub keyway angles generally match: NEH Series, NEF Long Spacer Type

Hub keyway angles do not match: NEF Single Type, NEF Spacer Type, NEF Long Spacer Type (standard length), NEF Single Plate Spacer Type

When accurate matching of the keyway angles is required, please specify the “matching keyway angle type” when placing your order. With the matching keyway angle type, the maximum angle difference is $\pm 2^\circ$.

When higher accuracy is required in matching keyway angles, the Power-Lock Type is recommended.

Dimension "F"

Unit: mm

Model No.	NEF02	NEF04	NEF10	NEF18	NEF25	NEF45	NEF80	NEF130	NEF210	NEF340	NEF540	NEF700
Dimension "F"	5	8	8	10	12	15	18	20	20	25	30	35

Set Screw Size

Unit: mm

Model No.	Standard Shaft Bore Diameter									
	9-20	22	24-29	30	32-38	40	42-48	50	52	
NEF02	M4×4									
NEF04	M4×4	M4×4								
NEF10	M4×4	M6×6	M6×6	M4×4	M4×4					
NEF18	M4×4	M6×6	M6×6	M6×6	M4×4					
NEF25	M5×5	M5×5	M6×6	M6×6	M8×8	M6×6	*1			
NEF45	M5×5	M5×5	M6×6	M6×6	M8×8	M8×8	M8×8	M6×6		
NEF80	M6×6	M6×6	M6×6	M6×6	M8×8	M8×8	M10×10	M10×10	M10×10	
NEF130			M8×8	M8×8	M8×8	M8×8	M10×10	M10×10	M12×12	
NEF210			M10×10	M10×10	M10×10	M10×10	M10×10	M10×10	M12×12	
NEF340							M12×12	M12×12	M12×12	
NEF540										M12×12
NEF700										M12×12

*1 ϕ 42 : M5×5, ϕ 43-48 : M8×8

Unit: mm

Model No.	Standard Shaft Bore Diameter									
	55-57	60	63-70	71-75	80	85-90	95-100	105-110	112-115	
NEF80	M8×8	M6×6								
NEF130	M12×12	M12×12	M12×12	M10×10						
NEF210	M12×12	M12×12	M16×16	M16×16	M12×12					
NEF340	M12×12	M12×12	M16×16	M16×16	M16×16	M16×16	M12×12			
NEF540	M12×12	M12×12	M16×16	M16×16	M16×16	M20×20	M20×20	M16×16		
NEF700	M12×12	M12×12	M16×16	M16×16	M16×16	M20×20	M20×20	M20×20	M16×16	

* For set screws, tap holes are provided in two places: on the keyway and at a position 90° clockwise from the keyway tap hole.

* During shipment, two set screws are provided for each shaft bore.


BORE SPECIFICATIONS

Shaft Bore Machining / Keyway Dimensions

1. Tolerance for Shaft and Bore

For normal use, transition fit is recommended. For high-speed rotation that requires caution in regards to the dynamic balance, an interference fit is recommended.

For the extended-diameter hub, the keyway should be machined at the following position.

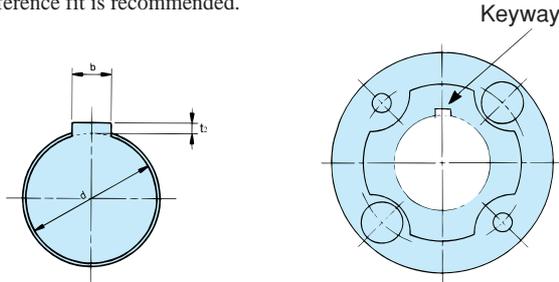

Keyway Dimension Table

New JIS (JIS B1301-1996)

Old JIS (JIS B1301-1959)

Shaft Dia. d	Nominal Key Size Shaft × Height b × (h)	Keyway Depth	
		Shaft t ₁	Hub t ₂
Above 8, up to 10	3 × 3	1.8	1.4
Above 10, up to 12	4 × 4	2.5	1.8
Above 12, up to 17	5 × 5	3.0	2.3
Above 17, up to 22	6 × 6	3.5	2.8
Above 20, up to 25	(7 × 7)	4.0	3.0
Above 22, up to 30	8 × 7	4.0	3.3
Above 30, up to 38	10 × 8	5.0	3.3
Above 38, up to 44	12 × 8	5.0	3.3
Above 44, up to 50	14 × 9	5.5	3.8
Above 50, up to 55	(15 × 10)	5.0	5.0
Above 50, up to 58	16 × 10	6.0	4.3
Above 58, up to 65	18 × 11	7.0	4.4
Above 65, up to 75	20 × 12	7.5	4.9
Above 75, up to 85	22 × 14	9.0	5.4
Above 80, up to 90	(24 × 16)	8.0	8.0
Above 85, up to 95	25 × 14	9.0	5.4
Above 95, up to 110	28 × 16	10.0	6.4
Above 110, up to 130	32 × 18	11.0	7.4
Above 125, up to 140	(35 × 22)	11.0	11.0
Above 130, up to 150	36 × 20	12.0	8.4
Above 140, up to 160	(38 × 24)	12.0	12.0
Above 150, up to 170	40 × 22	13.0	9.4
Above 160, up to 180	(42 × 26)	13.0	13.0
Above 170, up to 200	45 × 25	15.0	10.4
Above 200, up to 230	50 × 28	17.0	11.4

Shaft Dia. d	Nominal Key Size Shaft × Height b × (t ₂ + t ₁)	Keyway Depth	
		Shaft t ₁	Hub t ₂
10 or more, up to 13	4 × 4	2.5	1.5
Above 13, up to 20	5 × 5	3.0	2.0
Above 20, up to 30	7 × 7	4.0	3.0
Above 30, up to 40	10 × 8	4.5	3.5
Above 40, up to 50	12 × 8	4.5	3.5
Above 50, up to 60	15 × 10	5	5
Above 60, up to 70	18 × 12	6	6
Above 70, up to 80	20 × 13	7	6
Above 80, up to 95	24 × 16	8	8
Above 95, up to 110	28 × 18	9	9
Above 110, up to 125	32 × 20	10	10
Above 125, up to 140	35 × 22	11	11
Above 140, up to 160	38 × 24	12	12
Above 160, up to 180	42 × 26	13	13
Above 180, up to 200	45 × 28	14	14
Above 200, up to 224	50 × 31.5	16	15.5



Shaft Diameter and Recommended Shaft Bore Tolerance

Shaft Dia.		Bore Dia.		Shaft Dia.		Bore Dia.	
Size	Tolerance	Transition Fit	Interference Fit	Size	Tolerance	Transition Fit	Interference Fit
12	j6	H7	M7	65	m6	H7	N7
14							
16							
18							
19							
20							
22							
24							
25							
28							
30	k6	H7	N7	120	m6	H7	P7
32							
35							
38							
40							
42							
45							
48							
50							
55							
56	m6	H7	N7	130	m6	H7	P7
60							
63							
125							
140							
150							
160							
170							
180							
190							
200							
210							
220							

3. Shaft Bore Machining

For the machining of shaft bores in the hub and the pressure flange, refer to the recommended machining dimensions specified on p. 44.



When machining bores for Power-Lock type couplings, conform to the machining dimensions as shown below.

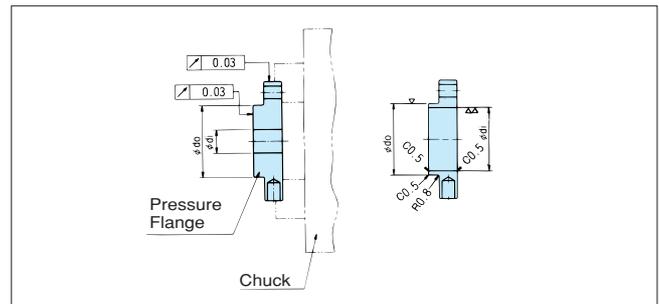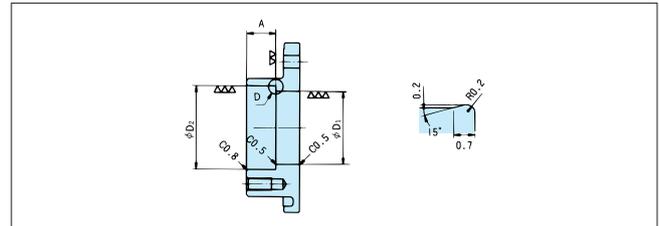

2. Centering Adjustment

Before machining shaft bores, perform the centering adjustment as shown below:

Hub

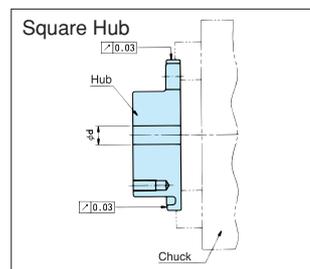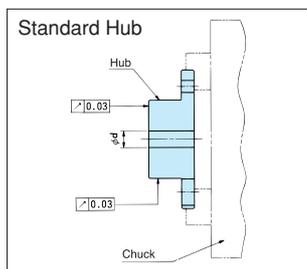

With the square hub for the NEF10, 18, 25, perform the centering adjustment on the flange periphery. The reading on the dial gauge may fluctuate markedly on the drilled bore in the hub. This is because the flange is displaced toward the periphery during machining of the drilled bore. When reading the dial gauge, disregard the values at such locations.

Rough Bore Dimension


Unit: mm

Model No.	Hub (Rough Bore) d	Pressure Flange	
		d _i	d _o
NEF 02	8	—	—
NEF 04	8	10.1	14.9
NEF 10	10	13	39.8
NEF 18	12	13	39.8
NEF 25	15	18.2	44.8
NEF 45	15	—	—
NEF 80	15	—	—
NEF130	25	—	—
NEF210	25	—	—
NEF340	45	—	—
NEF540	50	—	—
NEF700	50	—	—
NEH 09 W	50	—	—
NEH 14 W	55	—	—
NEH 20 W	65	—	—
NEH 30 W	75	—	—
NEH 41 W	80	—	—


1. Recommended Shaft Bore Machining Dimensions for Power-Lock Type Couplings

Shaft Dia.	Power-Lock Size	Hub						Pressure Flange	
		Shaft Bore Diameter		Axial Dimension (A) $+0.1$ ₀			Pressure Flange Inside/Outside Diameters		
		ϕD_1	ϕD_2	No. of Power-Locks			d_1 $+0.1$ ₀	d_o 0 _{-0.1}	
				1	2	3			
10	PL010 × 013E	10H7 $+0.015$ ₀	13H7 $+0.018$ ₀	7.5	12	16.5	10.1	12.9	
12	PL012 × 015E	12H7 $+0.018$ ₀	15H7 $+0.018$ ₀	7.5	12	16.5	12.1	14.9	
13	PL013 × 016E	13H7 $+0.018$ ₀	16H7 $+0.018$ ₀	7.5	11	16.5	13.1	15.9	
14	PL014 × 018E	14H7 $+0.018$ ₀	18H7 $+0.018$ ₀	9.3	15.6	21.9	14.1	17.9	
15	PL015 × 019E	15H7 $+0.018$ ₀	19H7 $+0.021$ ₀	9.3	15.6	21.9	15.1	18.9	
16	PL016 × 020E	16H7 $+0.018$ ₀	20H7 $+0.021$ ₀	9.3	15.6	21.9	16.1	19.9	
17	PL017 × 021E	17H7 $+0.018$ ₀	21H7 $+0.021$ ₀	9.3	15.6	21.9	17.1	20.9	
18	PL018 × 022E	18H7 $+0.018$ ₀	22H7 $+0.021$ ₀	9.3	15.6	21.9	18.1	21.9	
19	PL019 × 024E	19H7 $+0.021$ ₀	24H7 $+0.021$ ₀	9.3	15.6	21.9	19.2	23.8	
20	PL020 × 025E	20H7 $+0.021$ ₀	25H7 $+0.021$ ₀	9.3	15.6	21.9	20.2	24.8	
22	PL022 × 026E	22H7 $+0.021$ ₀	26H7 $+0.021$ ₀	9.3	15.6	21.9	22.2	25.8	
24	PL024 × 028E	24H7 $+0.021$ ₀	28H7 $+0.021$ ₀	9.3	15.6	21.9	24.2	27.8	
25	PL025 × 030E	25H7 $+0.021$ ₀	30H7 $+0.021$ ₀	9.3	15.6	21.9	25.2	29.8	
28	PL028 × 032E	28H7 $+0.021$ ₀	32H7 $+0.025$ ₀	9.3	15.6	21.9	28.2	31.8	
30	PL030 × 035E	30H7 $+0.021$ ₀	35H7 $+0.025$ ₀	9.3	15.6	21.9	30.2	34.8	
32	PL032 × 036E	32H7 $+0.025$ ₀	36H7 $+0.025$ ₀	9.3	15.6	21.9	32.2	35.8	
35	PL035 × 040E	35 $+0.030$ $+0.010$	40H7 $+0.025$ ₀	10	17	24	35.2	39.8	
36	PL036 × 042E	36H7 $+0.025$ ₀	42H7 $+0.025$ ₀	10	17	24	36.2	41.8	
38	PL038 × 044E	38H7 $+0.025$ ₀	44H7 $+0.025$ ₀	10	17	24	38.2	43.8	
40	PL040 × 045E	40H7 $+0.025$ ₀	45H7 $+0.025$ ₀	11	19	27	40.2	44.8	
42	PL042 × 048E	42H7 $+0.025$ ₀	48H7 $+0.025$ ₀	11	19	27	42.2	47.8	
45	PL045 × 052E	45H8 $+0.039$ ₀	52H8 $+0.046$ ₀	13	23	33	45.2	51.8	
48	PL048 × 055E	48H8 $+0.039$ ₀	55H8 $+0.046$ ₀	13	23	33	48.2	54.8	
50	PL050 × 057E	50H8 $+0.039$ ₀	57H8 $+0.046$ ₀	13	23	33	50.2	56.8	
55	PL055 × 062E	55H8 $+0.046$ ₀	62H8 $+0.046$ ₀	13	23	33	55.2	61.8	
56	PL056 × 064E	56H8 $+0.046$ ₀	64H8 $+0.046$ ₀	15	27	39	56.2	63.8	
60	PL060 × 068E	60H8 $+0.046$ ₀	68H8 $+0.046$ ₀	15	27	39	60.2	67.8	
63	PL063 × 071E	63H8 $+0.046$ ₀	71H8 $+0.046$ ₀	15	27	39	63.2	70.8	
65	PL065 × 073E	65H8 $+0.046$ ₀	73H8 $+0.046$ ₀	15	27	39	65.2	72.8	
70	PL070 × 079E	70H8 $+0.046$ ₀	79H8 $+0.046$ ₀	17	31	45	70.3	78.7	
71	PL071 × 080E	71H8 $+0.046$ ₀	80H8 $+0.046$ ₀	17	31	45	71.3	79.7	

Hub

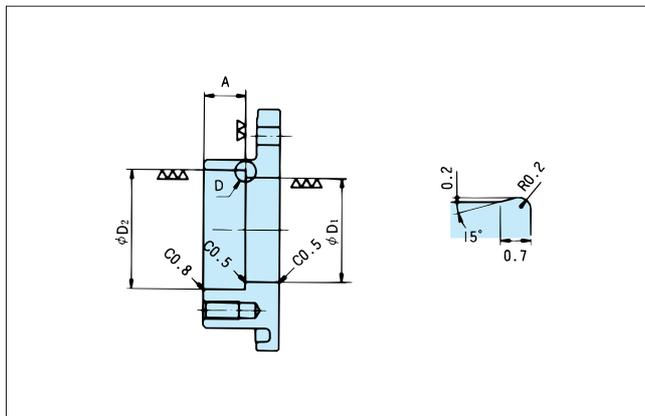

Pressure Flange

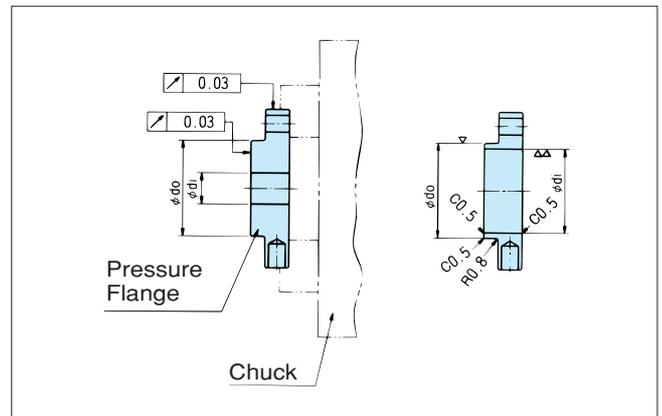


BORE SPECIFICATIONS

2. Recommended Taper Shaft Bore Machining Dimensions

For the machining of bores for servo motor taper shafts, the following dimensions are recommended.


NEF04 Standard Hub

Recommended dimensions for $\phi 11$ taper shaft bore

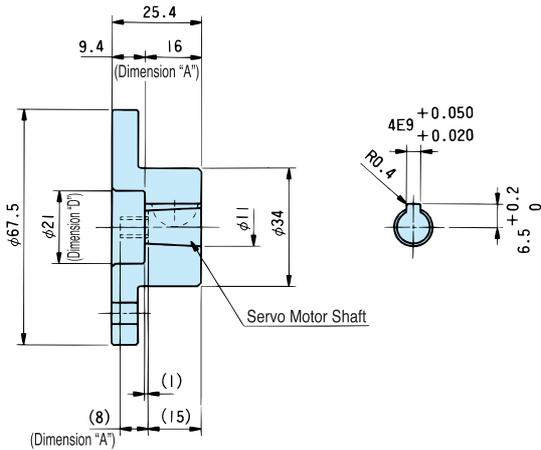

NEF10 Standard Hub


Recommended dimensions for $\phi 16$ taper shaft bore

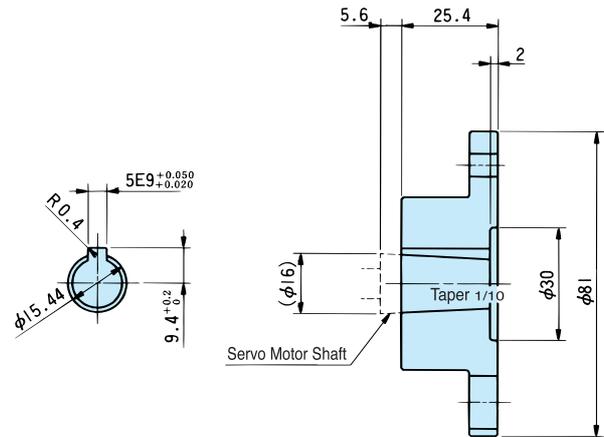

The servo motor shaft end is recessed from the hub end face by 2.4 mm. See the Example Installation below. Therefore, if the shaft diameter range of the hub is between $\phi 22$ and $\phi 35$, only a single Power-Lock can be used.

NEF04 Standard Hub

Recommended dimensions for $\phi 16$ taper shaft bore

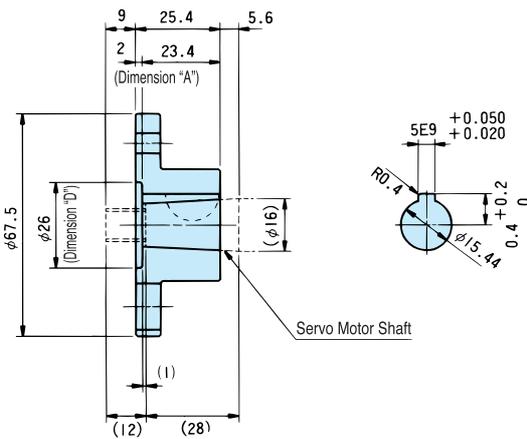


When an M10 JIS Type 3 nut is used for the shaft end, the servo motor shaft end is recessed from the hub end face by 2.9 mm. In this case, the number of available Power-Locks is as listed on the right.

Shaft Dia.	No. of Power-Locks
$\phi 12-\phi 13$	3
$\phi 14-\phi 16$	2
$\phi 17-\phi 22$	1

NEF04 Long Hub and NEF10 Long Hub


Recommended dimensions for $\phi 16$ taper shaft bore

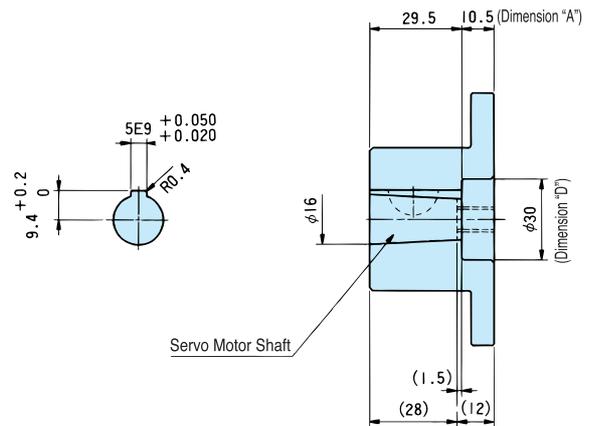

The servo motor shaft end does not protrude from the long hub. The number of available Power-Locks for the hub is as listed on p. 31.

Contact us for machining bores other than the taper shaft bores listed above.

(Example installation)

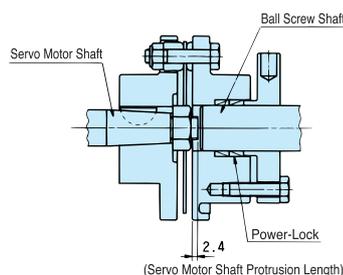

Safety Instructions

WARNING	Death or serious injury may result from misusing the product without following the directions given under this sign.
CAUTION	Minor or moderate injury, as well as damage to the product may result from misusing the product without following the directions given under this sign.

Note : Failure take heed of information labeled “CAUTION” may also lead to serious accidents depending on the situation.



WARNING

(General)

- Install a safety cover and prevent access to any rotating parts: otherwise injury may occur. Set a safety mechanism to stop the rotating parts when the cover is lifted.
- Transporting, installing, operating, maintaining or inspecting must be carried out by skilled and professional engineers to avoid mis-handling and hazardous situations.
- When coupling is used with vehicles that carry human, use a device to protect the vehicle: otherwise, accidents and damage may occur.
- When the coupling is used for an elevator, install a safety device on the elevator in order to prevent it from falling, which can cause damage and accidents resulting in death or injury.

(Unpacking upon delivery)

- If delivered in a wooden case, unpack with care. Sharp nails may cause injury.

(Additional machining)

- Never modify the coupling; the quality or function of the product may decrease and break or damage the machine or injure the operator.

(Transportation)

- Never step under the product when it is being elevated for transportation: otherwise, either the product or load may fall, causing accidents resulting in death or injury.

(Installation)

- Wear appropriate clothing and safety gear (safety goggles, gloves, shoes, etc.).
- Make sure the power is switched off, and the machine is completely stopped before installing. Take caution so that the power does not reconnect accidentally.
- Make sure to tighten and apply sufficient amount of anti-loosening agent to the hexagonal socket head cap screws.

(Operation)

- Avoid contact with any rotating parts (coupling, shaft, etc.) during operations. Rotating parts can catch approaching objects and cause serious injuries.

(Maintenance and inspection)

- Avoid contact with any rotating parts (coupling, shaft, etc.) during maintenance and inspection. Rotating parts can catch approaching objects and cause serious injuries.
- Make sure the power is switched off, and the machine is completely stopped before carrying out maintenance and inspection. Take caution so that the power does not reconnect accidentally.
- Make sure the driving and driven equipment are also completely stopped.



CAUTION

(General)

- Do not use coupling beyond its capacity as specified in the drawing. Exceeding its capacity can break the machine and cause injuries.
- Do not use damaged couplings. They can break your equipment and cause injuries.

(Transportation)

- Pay extra attention so that the equipment will not fall or rollover during transportations.

(Installation)

- Do not touch the edge and inner diameter of any part with bare hands to avoid possible injury.
- Make sure to align the drive and driven shafts as instructed in the manual when installing the coupling.

(Operation)

- Do not touch the coupling during operations to avoid injuries.
- Immediately stop the machine upon any sign of abnormal operation.

(Maintenance and inspection)

- Wear appropriate clothing and safety gear (safety goggles, gloves, shoes, etc.).
- Clean the surrounding area and maintain a clutter-free space to avoid secondary accidents.
- Comply with Ordinance on Labor Safety and Hygiene 2-1-1 general standards.
- Conduct periodic inspections to make sure that the drive and driven shafts are aligned as described in the manual, and that the rubber and plastic parts are not worn or deformed.

(Environment)

- Coupling scraps should be disposed as general waste by skilled professionals.
- This coupling meets RoHS (Restriction of Certain Hazardous Substances) standards and contains no hazardous chemicals.